



2025 2026
COLLECTION



FABER

FRANKE'S AIR EXPERT

70

YEARS



SHAPING AIR
SINCE 1955



FRANKE'S AIR EXPERT

We invented the first hood in 1955. Since 1958, we have been offering hood and air treatment solutions that meet consumer's needs and respect the environment.

Since 2005, we have been the **Air Expert of the Franke Group**, which for over 100 years stands for high quality, innovative engineering and exceptional design. Its recipe for success: building on traditions while creating new things. Together, we have grown successfully over all these years.

In 2021, Franke and Faber brands both became part of **Franke Home Solutions division**, a logical step to expand the Group's presence in the kitchen and conquer new territories together. By joining forces, we are making even better use of our know-how, experience and complementary skills.

We are now taking the opportunity to proudly announce our competence in air treatment and our expert position within the Franke Group.

It's the right moment to take this step forward, as this new endorsement, Franke's Air Expert, will enrich Faber and Franke with additional values. That's why, thanks to our leading expertise in air treatment, **we are Franke's Air Expert.**

At Faber, we are proud of
our significant heritage.

IMPROVING AIR QUALITY SINCE 1955

AT FABER, WE ARE PROUD
OF OUR SIGNIFICANT HERITAGE.


Air is part of our origin and we have a unique expertise in our sector. Over the years we've molded air into a thousand forms, using steel, plexiglass, glass and wood. We've turned the kitchen hood into an object of design. We've given it smart functions: light fittings, air conditioner and filters. In brief, we have connected it to the future.

We understand how the world is changing and we keep innovating to make tomorrow's air even purer.

We are proud to be part of the **Franke Group** as its **Air Expert**.

2025

Faber anniversary

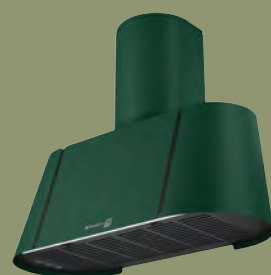

1955

Faber Plast
is founded.



1958

The first
Plexiglass hood.



1986

NOVA
The first
chimney hood.



1995

AXIA
The first T Shape
hood.



1999

M@STER
The first
smart hood.



2004

MATRIX
The first hood that
hangs like a picture.



2008

KLIMA
The first air
conditioning hood.



2010

F-LIGHT GENERATION
The first
chandelier hood.



2016

TALİKA
The first totally
vertical hood.




2017

ILMA
The first hood that
eliminates condensation.



2018

GLOW
With Airlane
Technology.



2019

GALILEO
The first hob extractor
in A+++



2020

K-AIR
The first touch screen
connected hood with
air quality sensor.




2021

AIR HUB
Faber enters
the world
of purification.



2023

TRUE DOUBLE BLACK
New platform
Vertical hoods.

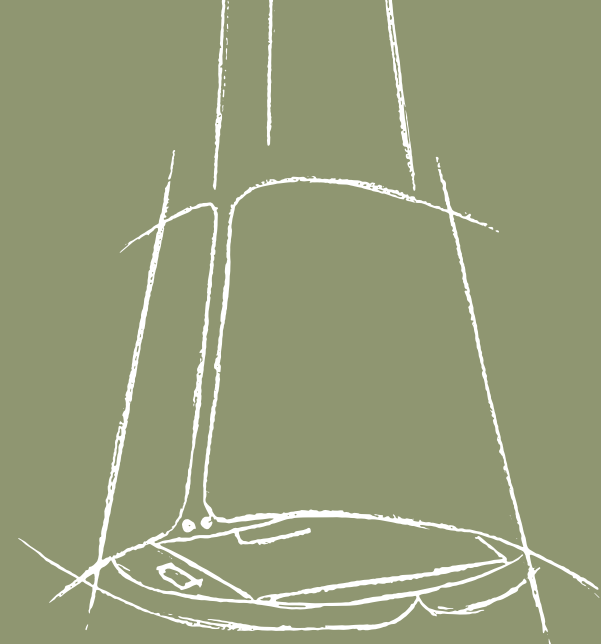

70 YEARS SHAPING AIR

A SPECIAL MILESTONE LIKE OUR 70TH BIRTHDAY DESERVES A SPECIAL ANNIVERSARY EDITION: BEAT HOODS RANGE AND HOB IN DARK FOREST COLOUR.



FBH 64 DF
Discover more info on page 276




Beat XL Wall
Discover more info on page 109



Beat XL Suspended
Discover more info on page 245

70 YEARS OF DESIGN AND AIR INNOVATION

To celebrate our **70th anniversary**, and the over 30 million hoods delivered to your homes, we are proud to introduce a new color variation for the exclusive **Beat Range** - including the Suspended Hood, Suspended Hood XL, Wall Hood, and Wall Hood XL - alongside two induction hobs, all in the elegant **Dark Forest** finish.

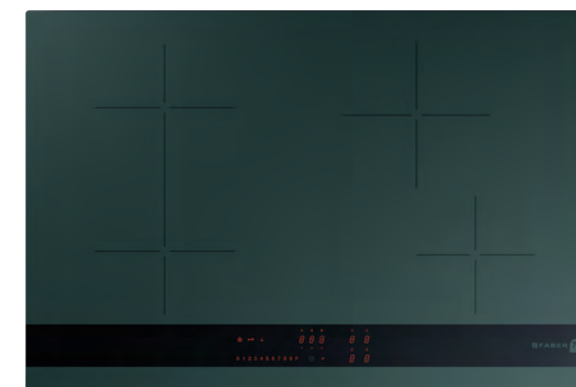

FCH 84 DF KL
Discover more info on page 274



Beat Suspended
Discover more info on page 249



Beat Wall
Discover more info on page 113

This refined shade reflects our **brand's iconic logo**, a timeless symbol of quality, passion, and innovation. This special edition adorned with a **dedicated 70th anniversary emblem**, combines sleek design with advanced technology to honor our Faber's **seven decades of excellence**, reaffirming our leadership as an air expert.

THE RECIPE FOR A HEALTHIER FUTURE

We're on a mission to empower cleaner living at home through pioneering eco-friendly innovation and acting responsibly throughout our business and beyond. But we can't do it alone. By sharing the same vision and respect for the environment, we can achieve greater long-term positive impact. Here's a taste of what we have accomplished so far.

82%

of electric consumption in 2022 was renewable energy.

92%

of waste created in 2022 was reused or recycled.

95%

of Franke packaging is made from renewable materials.

Results to date gathered by HS Hoods division.

HOODS

Class A++ hoods are designed to reduce energy consumption by 85% compared to standard hoods thanks to their Brushless Motors, LED Light technology and other advanced technology that can benefit the entire household. As a result, Faber hoods are industry leading in terms of energy efficiency.

HOB EXTRACTORS

Durable, energy efficient solutions designed to reduce consumption by operating in sustainable and environmentally friendly ways. Faber Hob Extractors including the Galileo range are distinguished appliances with A+ up to A+++ energy efficiency ratings.

FILTERS

Designed for long lasting efficiency thanks to multilayer technology and innovative design allowing filters to be easily removed and washed in the dishwasher every 3-4 months for a maximum duration of 3 years.





OUR FIRST INSPIRATION: **PEOPLE**

At Faber, we know how to look far but also very close. We look at people because they are our inspiration. Their needs and desires are the basic principles for which we strive to supply better and better products, time after time.

We study every single action people do in a Kitchen, even the smallest one. This allows us to offer products realized in accordance with the needs of the people.

BECAUSE EVERYTHING DEPENDS
ON WELLNESS OF THE PEOPLE.

SAFETY IS IN RELIABLE HANDS



THE EU
SAFETY
MARK



THE ITALIAN
QUALITY
MARK



INTERNATIONAL
SAFETY CERTIFICATION
BY INTERTEK ETL



THE QUALITY
MARK FOR THE USA
AND CANADA



THE CHINESE
QUALITY
MARK

When everything is working as it should, home is a more useful place. And when the air is pure and clean, home becomes a place of true functionality. That's what reliability means to us: making life better for years to come.

RECORDS IN EXCELLENCE

- ▲ The first **ISO 9001** Quality Certification in the field of kitchen hoods.
- ▲ **SGS Certificate of Excellence n°001:** a worldwide first.
- ▲ Integrated Management System for Quality (**ISO 9001:2015**), Occupational Health and Safety (**OHSAS 18001**) and the Environment (**ISO 14001**) certified by SGS.
- ▲ Products conforming to the strictest safety requirements and to standards **EN 61591** and **EN 60704-3**, tested in an authorized in-house laboratory, certified and guaranteed by leading international bodies.



Reliability is a constant characteristic of all Faber products.


ASPIRATION HOB PAG.47



AIR TREATMENT PAG.95



WALL PAG.105

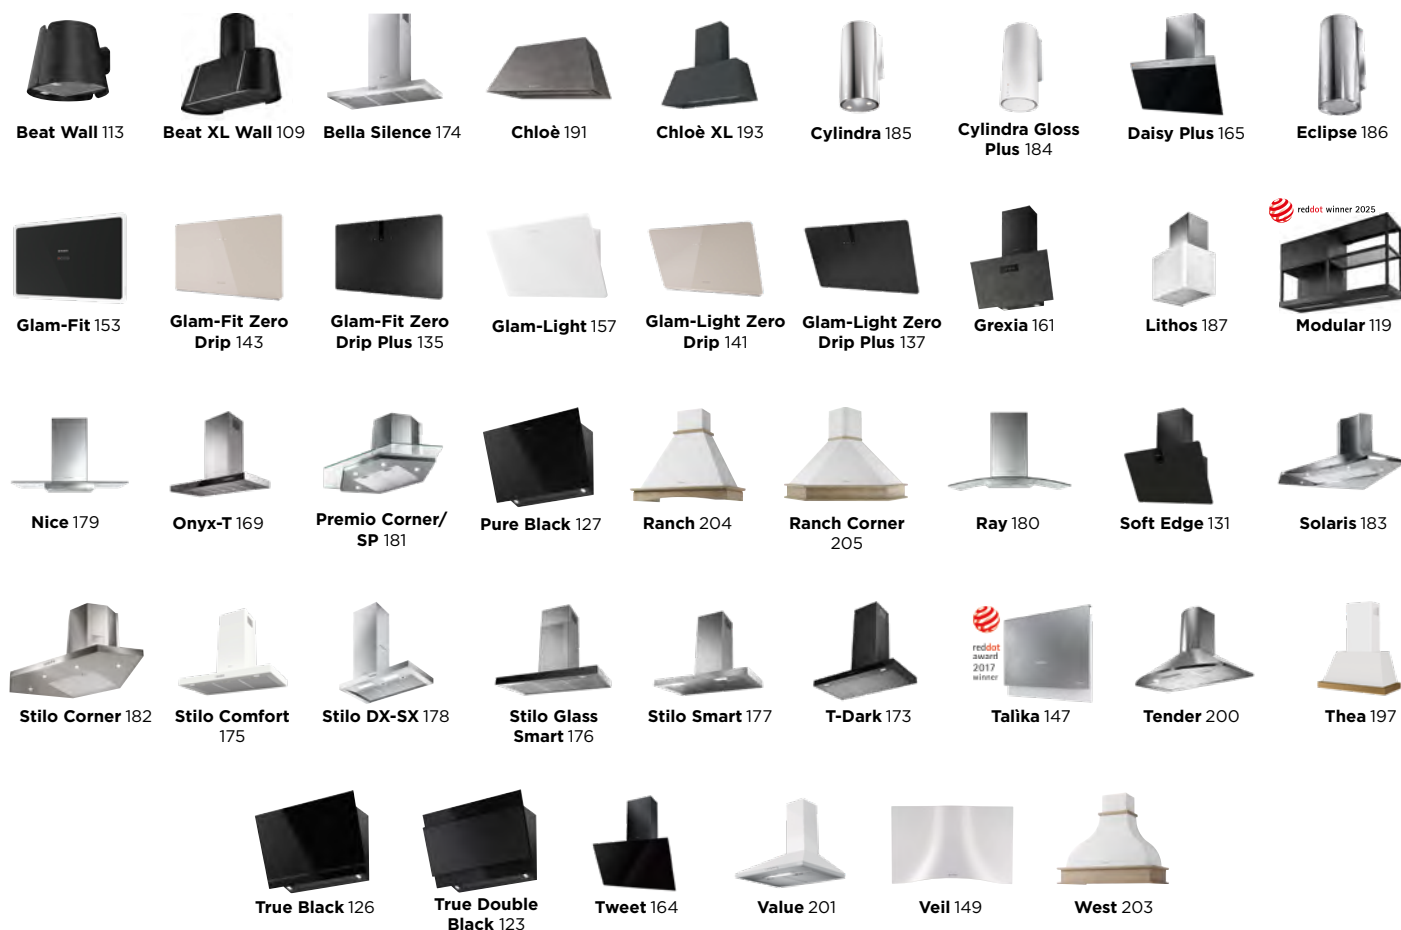

ISLAND PAG.207



SUSPENDED PAG.241




CEILING PAG.279



BUILT-IN PAG.313



HOB PAG.269













DOWNDRAFT PAG.309



ACCESSORIES PAG.349

INSTALATION PAG.360

ADVANCED TECHNOLOGY FOR REAL LIFE BENEFITS

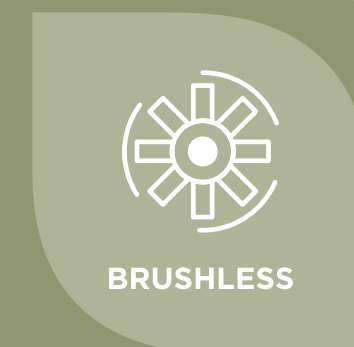



ADVANCED TECHNOLOGY
PAIRED WITH EXCEPTIONAL
AND FUNCTIONAL DESIGN
FOR A CONDENSATION-FREE
ENVIRONMENT



IT TOTALLY
ELIMINATES THE
CONDENSATION
EFFECT THANKS
TO THE DUAL
MICRO-FANS



IT EVAPORATES
CONDENSATION
THROUGH CONTACT
WITH SPECIALLY
HEATED SURFACES



IT COLLECTS
CONDENSATION
IN A GROOVE,
PREVENTING IT
FROM FALLING BACK
ONTO THE HOB

CONDENSATION IS NO LONGER A PROBLEM

FABER ELIMINATES THE PROBLEM OF CONDENSATION

Eliminating condensation is essential to protect the wall unit where the hood is installed and to prevent drops of moisture from falling onto the hob. Faber has succeeded by creating special anti-condensation systems of total effectiveness.

ZERO DRIP EXTREME

The Drip-Free Extreme System features Faber's exclusive patented technology, incorporating two micro-fans and inclined filters that provide enhanced airflow and exceptional protection against humidity. This innovative system is designed to preserve and maintain the ideal environment for a dry, cooking experience.

ZERO DRIP AND ZERO DRIP PLUS

The Faber Zero Drip and Zero Drip Plus systems stop condensation after it has formed. The first one collects it in a groove, preventing it from dripping onto the hob. The second makes it evaporate through contact with specially heated surfaces.



ZERO DRIP PLUS:
PRESSING A BUTTON
ON THE GLASS
PART OF THE HOOD
ACTIVATES A HEATING
RESISTOR THAT MAKES
THE CONDENSATION
EVAPORATE
COMPLETELY.



ZERO DRIP:
A SPECIAL STEEL
BAR COLLECTS
THE DROPS THAT
FORM ON THE
FRONT PANEL.

Model with technology ZERO DRIP EXTREME



In-Nova
Zero Drip Extreme

Models with technology ZERO DRIP PLUS



Glam Fit Zero
Drip Plus



Glam Light
Zero Drip Plus



In-Nova
Zero Drip Plus

Models with technology ZERO DRIP



Glam Fit
Zero Drip



Glam Light
Zero Drip



In-Nova
Zero Drip



In-Nova
Zero Drip Lite



IT ELIMINATES
VIRUSES
AND BACTERIA
SAFELY
WITHOUT OZONE
PRODUCTION

AIR HUB. A BREATH OF FRESH AIR

EMBRACE PURITY AT HOME


That's why Faber is investing all its air expertise to create solutions that inspire well-being with ecological systems that can eliminate up to 99.9% of viruses and bacteria.

AIR HUB: TWO PRODUCTS IN ONE FOR PURE WELL-BEING

A system to disinfect the air and a T-shaped hood - this is the dual nature of the Air Hub, a unique, dual-function product in a simple, elegant design, perfect for any style of interior.

1

AIR DISINFECTION
FOR THE HOME AND
ELIMINATION OF UP TO
99.99%* OF VIRUSES
AND BACTERIA

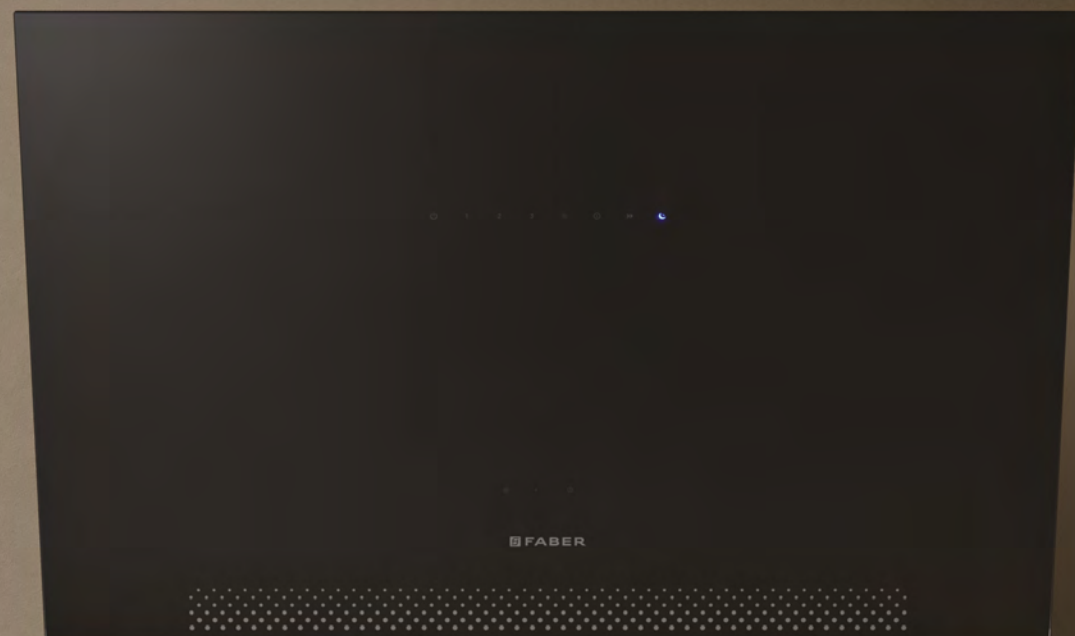

2

REMOVES COOKING
VAPOURS AND ODOURS




AIR HUB THE PUREST AIR EXPERIENCE

Air Hub guarantees clean, safe air for your kitchen and living environments. In fact, thanks to its UV-C technology, **it eliminates up to 99.99% of viruses and bacteria***, all without using chemicals.

*Laboratory tests carried out on E.coli and Staphylococcus aureus by the University of Siena.



**UV-C LAMP TECHNOLOGY
KILLS VIRUSES AND BACTERIA
WITH ABSOLUTE SAFETY
AND NO OZONE PRODUCTION**

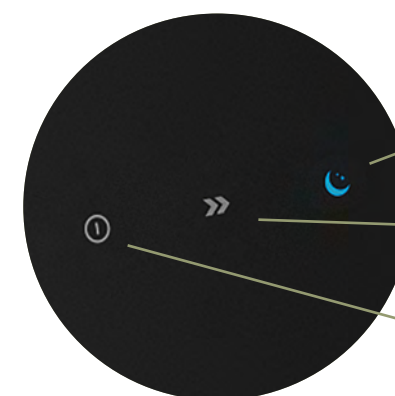

NIGHT Long cycle for complete disinfection with the minimum level of noise. Automatically switches on each night.

INTENSIVE Maximum speed of disinfection in the shortest possible time. Switches off automatically.

MANUAL Start the disinfection of the air. You can switch off manually, or it will automatically switch off after 24 hours.

Available:



AIR HUB VERTICAL
Black glass



AIR HUB CEILING
inox

See more details on page 98-99



FABER
CLOUD

IT MONITORS
AIR QUALITY
IN THE KITCHEN
AT ANY MOMENT,
EVEN FROM YOUR
SMARTPHONE



AIR QUALITY
SENSOR

IT AUTOMATICALLY
ADJUSTS SUCTION
POWER TO RESTORE
PERFECT AIR QUALITY

AIR TREATMENT. SMART HOODS

HOODS CONNECTED TO YOUR WORLD

All Faber hoods are fitted with an Air Quality Sensor. This innovative device monitors the air and activates suction if it detects the presence of allergens, pollutants or odours. By storing data on the Faber cloud, via an app that can be downloaded to smartphones, you can monitor the air quality at home at any time, even remotely.

K-AIR WITH INTEGRATED MONITOR


K-Air is an intelligent vertical hood with a built-in 21" monitor that can be controlled directly via the touchscreen or app. The exclusive Sensor Air Quality keeps the temperature, the percentage of humidity and the presence of volatile organic compounds (VOC and VOC), Carbon Monoxide and Nitrogen dioxide and methane under control in the domestic environment. The sensor activates the hood as soon as pollution thresholds are exceeded, primarily in the space where you cook.



AIR TREATMENT THE IDEAL SOLUTION FOR YOUR SMART HOME



Monitors indoor air quality and restores fresh air in your kitchen

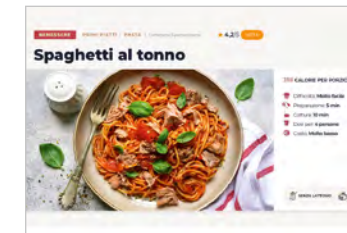

Your favourite web pages accessible anytime, connection to your internet browser (available on k-air model)



Thanks to the faber cloud, you can access it from anywhere and check your home environment



All functions can also be managed via the faber app




REMOTE MANAGEMENT TOO

The exclusive App is designed to monitor air quality in your kitchen and manage the hood remotely too, with simple and intuitive functions.

A range that is always connected.

AIR TREATMENT by Faber is a complete range comprised of vertical, ceiling, T-shape and built-in hood models. All the hoods are equipped with an Air Quality Sensor, connection to the Faber Cloud and can be controlled remotely via the App. In addition, the K-air model comes equipped with the exclusive 21.5 inch integrated monitor.



In-Nova Air



Heaven Air



K-Air



IT AUTOMATICALLY
MANAGES SUCTION
POWER WITH
RADIO CONNECTION
BETWEEN HOOD AND
INDUCTION HOB



AUTOMATIC
ADJUSTMENT
OF THE HOOD
POWER
TO EXTRACT
VAPOURS
AND ODOURS.



K-LINK TECHNOLOGY AND THE HOOD ADJUSTS ITSELF AUTOMATICALLY

FREE HANDS IN THE KITCHEN. THANK YOU, FABER


The beauty of cooking is also that you can express yourself freely, without distractions. If you have an induction hob and a Faber cooker hood with K-LINK connection, just start cooking and the suction power of the hood automatically adjusts to the selected cooking level.

HOB AND HOOD DIALOGUE WITH EACH OTHER

Faber has created an intelligent connection between hob and hood, through an integrated system that works with radio waves. A simple gesture is all it takes to set the hood to automatic operation. The system is always active because the radio signal is never interrupted. At the same time, the perfect operation of the hood is guaranteed avoiding the waste of energy and excessive noise that you could have set the suction at a level too high compared to the produced fumes.



The connection
is always active
even in the
presence
of dirt residues
on the hob.

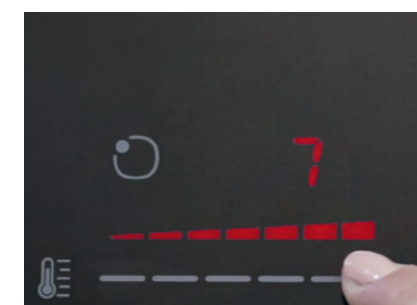

It can be
controlled
manually
whenever
you want.

Hood Models compatible with Faber Induction Hobs.



Beat XL Wall



Beat XL




Belle / Belle Plus



Céline Plus



Heaven 2.0



Heaven Air



Heaven Glass
2.0 Flat



High-Light



K-Air



Inside Up



In-Nova Air



In-Nova Premium



Inka Lux



Inka Lux Premium



Lybra Plus



Pareo Plus



Nest Plus



Odette Plus



T-shelf Evolution



Glam Light
Zero Drip Plus



Glam Fit Zero
Drip Plus



IT REDUCES TURBULENCE AND SWIRLS IN THE INDOOR AIRFLOW THANKS TO NOISE-LIMITING DIFFUSER TECHNOLOGY

IT GUARANTEES ENERGY SAVING AND HIGH ASPIRATION EFFICIENCY THANKS TO THE QUIETEST ENGINE ON THE MARKET



SOUND PRO:

- ▲ FLUID DYNAMIC OPTIMIZATION
- ▲ NOISE REDUCTION
- ▲ SOUND QUALITY OPTIMISATION

QUIET IN RESPECT OF NATURE

SILENCE IS COMFORT

To make the kitchen a comfortable environment to live in, it is essential to have a hood that works making as little noise as possible, even at full power.

SOUND PRO

By reducing turbulence and swirls in the internal airflow, the new blowers technology succeeds in both limiting noise and improving the sound quality of the hood.

BRUSHLESS MOTOR

Faber is constantly looking for innovative solutions and with this motor, it guarantees the best energy efficiency on the market.



sound quality optimization

The kitchen has become a place in our homes where we share special moments with the people we love. This is why hoods must increasingly combine high performance and quiet motors. After several studies and extensive research, Faber has developed a solution: Sound PRO.

FLUID DYNAMIC OPTIMIZATION

Thanks to an innovative design, the new blower significantly reduces turbulence and vortex of the internal air flow.

NOISE REDUCTION AND SOUND QUALITY OPTIMIZATION

At maximum power, the new technology limits the noise threshold of the hood up to -6db*, but it doesn't stop there. It also optimizes the sound produced, reducing the disturbance caused by high frequencies.

Available in several Faber models, check the icon on the individual product sheet.

*Data varies depending on the model in which the blower is installed.

IT REDUCES NOISE AT MAXIMUM POWER AND CIRCULATES AIR FOR 24 HOURS WHEN COMBINED WITH THE ECO FUNCTION

HUSH, IT'S COOKING TIME!

SIL & STILL TECHNOLOGY

Based on the study of aerodynamic flows inside the hood and targeted sound insulation, this Faber technology reduces noise at top power to just 52 dB(A). By activating the Eco Function, it ensures continuous air exchange in the surrounding environment for 24 hours, silently and with minimum consumption below 40 dB(A) comparable to the quietness of a library.



Models with technology SIL & STILL



THE SILENT PLEASURE OF A REMOTE MOTOR

IT GUARANTEES ENERGY SAVING AND HIGH ASPIRATION EFFICIENCY THANKS TO THE QUIETEST ENGINE ON THE MARKET

REMOTE BLOWER



The noise of the hood can be minimised by moving the motor away.

REMOTE SUCTION KIT

The remote suction kit, with the utmost simplicity, makes it possible to move the hood motor away from the cooking area.

THE SILENCE INCREASES SIX METRES AWAY

With the Remote Suction Kit, the motor can be moved to another location of the house up to six metres away from the hood. Minimal noise and maximum comfort are ensured not only in the kitchen but also in the living area.

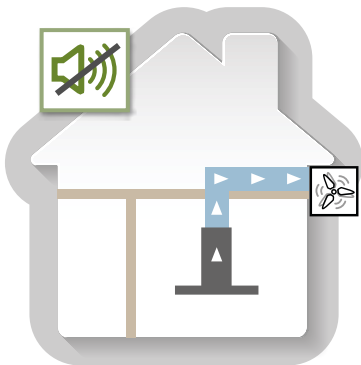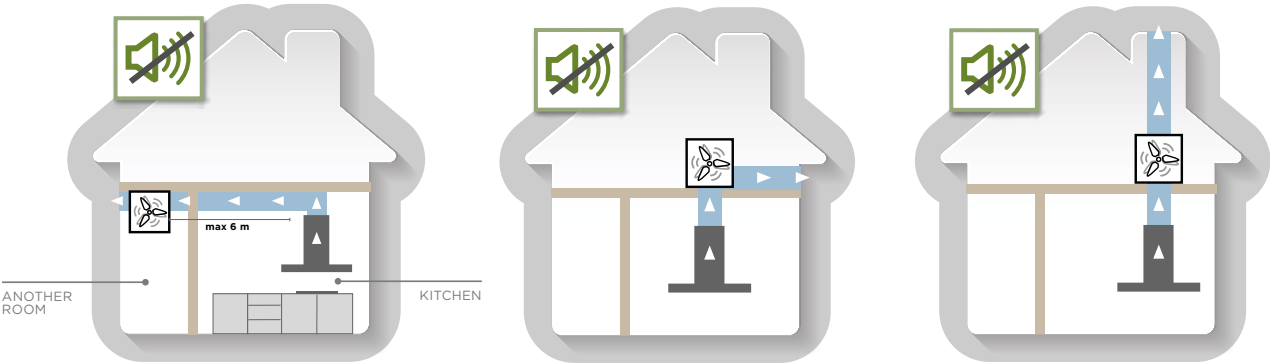

REMOTE EXTERNAL MOTOR

The remote external motor makes it possible to install the motor entirely outside the house and eliminate noise altogether.

The model with the dedicated range of hoods is shown in the Accessories section on page. 350



IT PROVIDES A SURFACE THAT IS SOFT AND SMOOTH TO THE TOUCH THANKS TO FENIX™ TECHNOLOGY, A MATERIAL WITH UNIQUE CHARACTERISTICS

IT REFLECTS LIGHT DIFFUSELY ON A SURFACE THAT IS SOFT TO THE TOUCH AND STAIN RESISTANT



IT ENSURES A PERFECTLY CLEAN HOOD AND A SMUDGE-FREE SURFACE THANKS TO THE SPECIAL ANTI-STAIN MATERIAL



FENIX®

USED AS A KITCHEN TOP IT IS A PERFECT MATCH FOR THE HOOD.

SOFT LINE REVOLUTIONISES DESIGN

Soft Line is the Faber range of hoods made with FENIX®, a high-tech material with unique characteristics. The matte, smudge-proof surface is soft to the touch and reflects very little light. It is non-porous to facilitate daily maintenance and cleaning. FENIX® is a material with high resistance to scratches, abrasions, dry heat and acids. Its properties make it perfect for kitchens. Another characteristic is that it can self-heal surface micro-scratches.



The Faber Soft Line consists of a suspended hood F-light (Soft Cube) and two vertical wall-mounted hoods (Soft Edge e Soft Slim). They are all available with three FENIX® finishes: Grigio Londra, Bianco Kos or Nero Ingo.

Available:



Soft Cube



Soft Edge



IT GUARANTEES MAXIMUM SUCTION THANKS TO A SECOND MOTOR IN THE CEILING, THROUGH AN INVISIBLE PASSAGE WITHOUT PIPING

4

EXPULSION FROM THE HOME ENVIRONMENT

3

SUPERIOR PURIFICATION THANKS TO THE OVERHEAD MOTOR

2

CREATION OF AN ASCENDING AIR VORTEX

1

EXTRACTION OF COOKING FUMES AND STEAM


AIRLANE TECHNOLOGY SUPERB EXTRACTION THROUGH AN INVISIBLE DUCT

REAL POWER MAKES NO NOISE. IT KEEPS THE SECRET

AIRLANE TECHNOLOGY can be used to install more than one Faber suspended hood in suction mode without the presence of unsightly connection pipes. In this way, you can have a hood and light cluster that integrates perfectly into the décor of your kitchen.

THE POWER OF A DOUBLE SUCTION

With AIRLANE TECHNOLOGY a second motor in the false ceiling conveys fumes and cooking vapours sucked from the hood without piping.

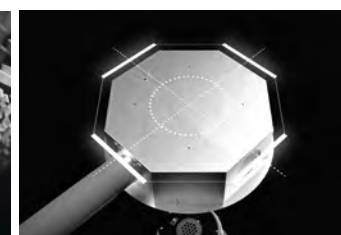

Airlane conceals a second motor in only 30 cm of false ceiling allowing you to choose between four air outlet positions during installation.



KIT AIRLANE TECHNOLOGY

AIRLANE DUCTING KIT cod. 112.0542.875

FEATURES

Finish	Ø of air outlet	Width
Stainless steel	150 mm	840 mm

THE AIRLANE KIT REPLACES THE CHIMNEY/ DUCT NEEDED FOR SUSPENDED INSTALLATION AS AN EXTRACTION HOOD.

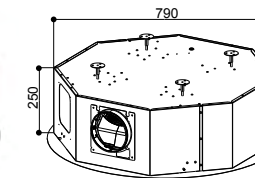

A new plus for f-light hoods. With the following F-Light hoods, both fixed and with Up & Down movement from the ceiling, you can get rid of suction piping at last. It disappears completely thanks to AIRLANE technology, which also guarantees better air purification and Energy Class A performance.



Belle / Belle Plus



Odette Plus



Celine Plus

Optional
on all F-LIGHT
models



Discover the
technology
video on our
YouTube channel



UP & DOWN

IT OPTIMISES SUCTION
THANKS TO THE HOOD
THAT DESCENDS ON THE
HOB AND RETRACTS
INTO THE CEILING
WHEN NOT NEEDED


UP

A DESIGNER LIGHT
FITTING THAT
FURNISHES THE
SPACE AT ANY
TIME OF THE DAY



DOWN

A HOOD THAT
MOVES DOWN
FOR MAXIMUM
SUCTION
EFFICIENCY
WHILE COOKING

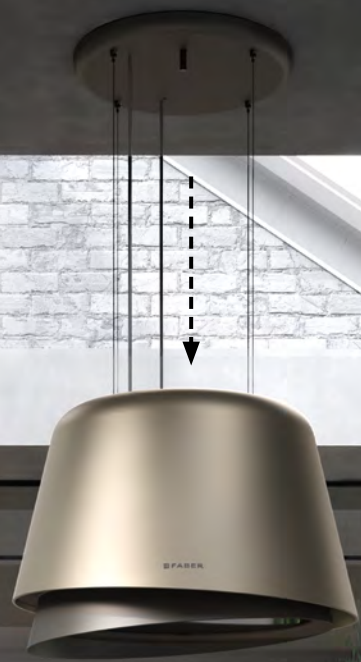

UP&DOWN TECHNOLOGY

FREEDOM OF MOVEMENT IS IN THE AIR

In open-concept kitchen and living room combos and in those where space is restricted, there is often the need to choose a suspended hood with a design matching the interior décor. Faber solves these needs by combining the function of a hood with that of a light fitting.

THERE'S A HOOD: IT'S IN THE LIGHT FITTING

With the Up & Down technology, Faber perfectly integrates hood and light fitting, combining the needs of aspiration with those of design and lighting.

AN AMAZING SPACE-SAVING SOLUTION

These hoods are excellent space-saving solutions capable of illuminating and enhancing any type of environment, from the most linear to the most sophisticated.



UP & DOWN: NICE MOVE IN THE KITCHEN



DOWN

The hood moves down to illuminate the hob and optimise suction while cooking.

UP

The hood returns to the ceiling to form an elegant light fitting. And FABER's brand-new remote control makes movement easy.

F-LIGHT: MOVE IN CLASS A

All F-Light models with their energy efficiency go far while bringing comfort closer.

Models with technology UP & DOWN



Belle Plus



Celine Plus



Lybra Plus



Nest Plus



Pareo Plus




Odette Plus



Zoom Plus



IT INCREASES ASPIRATION
CAPACITY, REDUCES
NOISE AND BETTERS THE
PERFORMANCE THANKS
MINIMUM CONSUMPTION

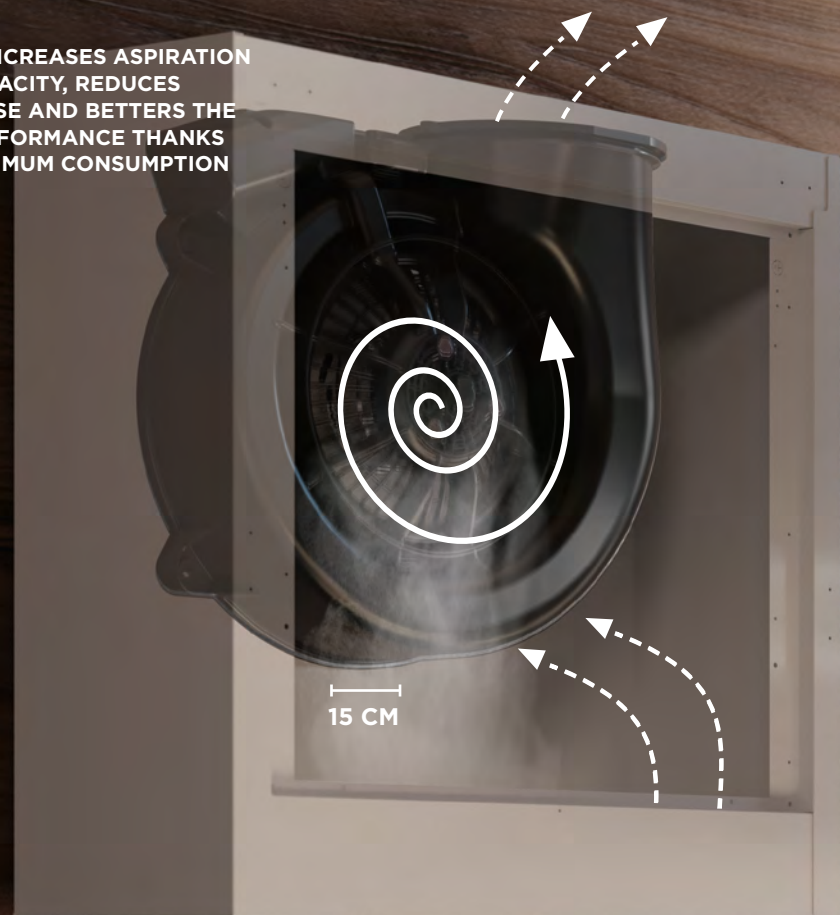

15 CM

- ▲ ULTRA-THIN
- ▲ LOW ENERGY CONSUMPTION
- ▲ HIGH EFFICIENCY



LESS CONSUMPTION MORE EFFICIENCY

FLAT DESIGN AND MAXIMUM COMFORT

Completely flat vertical hoods, for an even more trendy ultra-slim design. This is achieved with the Faber diffusers that concentrate the maximum suction power and the best energy efficiency in just 15 cm.

NAUTILUS

The exclusive diffuser design naturally inspired by the golden ratio for superlative comfort and outstanding performance



Models with technology NAUTILUS



Glam-Fit



Glam Fit
Zero Drip



Glam Fit
Zero Drip Plus



Talika



IT ELIMINATES 95% OF ODOURS, GUARANTEEING MAXIMUM EFFECTIVENESS IN FILTERING ACTIVATED CARBON



THE MAXIMUM EFFECTIVENESS OF ACTIVATED CARBON FILTRATION TO ELIMINATE 95% OF ODOURS

HIGH FILTERING NO BAD SMELLS

ONLY FABER HOODS ELIMINATE 95% OF ODOURS

What's the most effective activated carbon filtration technology? It's called HFH, which stands for "HIGH FILTERING HOOD". And it's a FABER exclusive, of course. HFH improves hood performance by removing odours from the air almost totally.

A LARGER SURFACE AREA AND TWO LAYERS OF ULTRA-EFFICIENT FILTER MATERIAL


Faber's potent HFH technology is based on a cylindrical filter design with a far larger surface area. It's twice as effective too, because it uses two high-efficiency filtration layers with different porosities and activated carbon concentrations. That's how the filter captures both large and small particles.

FABER MAKES THINGS EASIER...QUIETLY


Unlike other activated carbon filter systems, HFH also reduces noise by around 3 dB(A). And the smart, cylindrical shape of the filter makes easy work of removing the dishwashercompatible filter material.



Dishwasher safe.

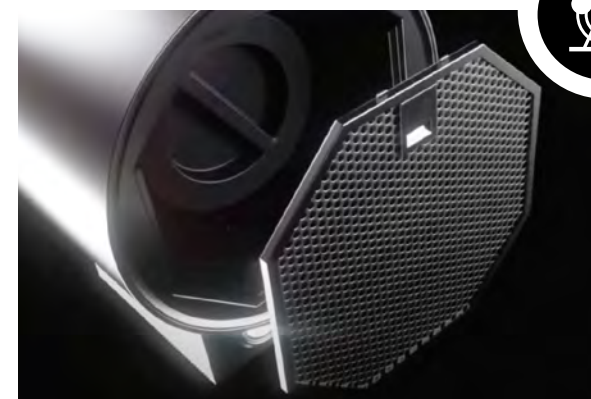

The **easy-to-install** cylindrical filter has a larger area compared guaranteeing more effectiveness.

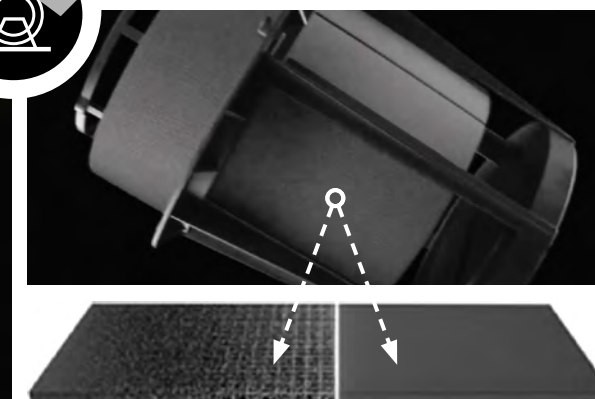

Ultra-filtering material consisting of two panels with different porosity and concentration of active carbon. The first layer captures the coarsest particles and the second smaller ones, increasing effectiveness even more.

Models with technology HFH



Stilo DX-SX



Stilo Comfort



Stilo Glass Smart



Stilo Smart



Nice



Ray



WATERPROOF

WATERPROOF

Any liquid spilled during cooking flows directly into a suction grid and is collected in an automatically drained tray under the hood, small enough to leave space for utensil drawer.



**POWER
MANAGEMENT**

POWER MANAGEMENT

Adjustable absorption setting on 4 power levels (KW). No more blackouts at home!



REAR OUTLET

REAR OUTLET

The rear air outlet available with many FABER hoods allows fumes to be channelled to the rear instead of upwards. This eliminates the need for an upper duct, freeing up useful space above the hood.



DELAY 30

DELAY 30

Automatic shutdown delay: you can postpone the motor shutdown to eliminate residual odours completely.



**INTENSIVE
SPEED**

INTENSIVE SPEED

Designed to deal with even the strongest cooking aromas, the Intensive Speed function activates maximum extraction power for 10 minutes.



BOOST

BOOST

Thanks to the Double Intensive Function. Even the most persistent cooking steam and smells are eliminated in just a few minutes.



**PERIMETER
ASPIRATION**

PERIMETER ASPIRATION

By drawing air through a narrowed channel, Perimeter Aspiration increases suction and reduces noise without increasing energy consumption.



FILTER ALARM

FILTER ALARM

Filter saturation alarm: warns you when it is time to clean the grease filter.



SELF - START

SELF START

A special sensor switches the hood on as soon as air temperature reaches 130°F. A smart sensor activates your hood automatically whenever needed.



**LED LIGHT
DIMMER**

LED LIGHT DIMMER

Dimmable light: at the touch of a button the light is dimmed down and can be left on for a long time with minimal energy consumption.



**TUNABLE
WHITE**

TUNABLE WHITE

Choose and vary the color temperature of the light, from warmer (tending to yellow) to colder (tending to white).



TOUCHSLIDER

TOUCH CONTROL

Extremely comfortable, user-friendly Touch Slider controls.



**AUTOMATIC
FUNCTION**

AUTOMATIC FUNCTION

The hood will turn on at the most suitable speed automatically, adapting the extraction capacity to the maximum cooking level.



24 HOUR

24 HOUR

Keeping kitchens fresh and odor free around the clock, the 24 Hour feature automatically turns the hood on for 10 minutes every hour.



**REMOTE
CONTROL**

REMOTE CONTROL

The remote control is compatible with many Faber hoods. To adjust suction and special functions, such as the courtesy light, 24H, Up&Down and Steam Off features. Controlling your hood is easier than ever.



**CHARCOAL FILTER
INCLUDED**

ACTIVATED CARBON FILTERS AS STANDARD

Essential for installation as a filtering version, these filters are made up of a combination of active carbons that work to eliminate odours and purify the air. The standard filters are already included for many hoods. They must be replaced every 2-3 months for optimal efficiency.



**CERAMIC
FILTER**

CERAMIC FILTER

Activated carbon ceramic filter allows to achieve high absorption efficiency. Specifically designed for selected kits suitable for Galileo extractor hob in filtering version. It is possible to regenerate the filter in the oven at 200° every 2-3 months.

ASPIRATION HOB

GALILEO 60	89
GALILEO BOLD	81
GALILEO GLASS	65
GALILEO LINEAR	85
GALILEO NG	69
GALILEO SLIM	93
GALILEO SMART	77
GALILEO STRIPES	73

GALILEO



ASPIRATION HOB

GALILEO

A SIMPLY BRILLIANT HOOD



SPACE
SAVING

SAVE SPACE

It allows for enough space to install a space saving cutlery drawer underneath the hob.



TOUCHSLIDER

EASY TO USE

Touch slider commands are extremely simple and quick.



[2]
FLEXI
ZONE

FREE YOUR CREATIVITY

Cooking zones can be activated in combined mode to use them at the same power level, allowing for larger pots usage.



WATERPROOF

MAXIMUM SAFETY IN THE KITCHEN

Waterproof technology guarantees excellent performance in total safety even in the event of water spills: these won't interfere with the cooking and will be collected in a small compartment.



USEFUL

The anti-grease filter has an excellent performance while also being the first barrier that can collect up to 0,5l of water spills. It is easily removable and washable in the dishwasher.



A+++
ENERGY

THE MOST EFFICIENT.
IT REPRESENTS THE HIGHEST LEVEL OF AESTHETIC PERFECTION AS THE RESULT A PRODUCT COMBINATION INTEGRATING HOB AND HOOD WHILE ENSURING GREAT PERFORMANCES.

THE MOST EFFECTIVE.
THANKS TO CAREFUL FLUID DYNAMICS STUDIES, GALILEO IS CHARACTERISED BY A HIGH PICK-UP CAPACITY OF UP TO 9.97 METRES PER SECOND. WITHIN MINUTES, EVEN THE MOST PERSISTENT COOKING VAPOURS AND ODOURS ARE ELIMINATED.

SUCTION
SPEED

GALILEO RANGE

THE WHOLE RANGE WITH A SINGLE LOOK



GALILEO STRIPES

Featuring a powerful 600 m³/h extractor and energy efficiency class A+, this model combines powerful performance with eye catching design. Featuring two flexi zones for seamless culinary exploration.



GALILEO GLASS

Attention to detail in the finishes, glossy glass controls and matt glass cooking area, with new grille featuring central glass detail to lend consistency to the overall design.



GALILEO BOLD

Make a bold statement in your kitchen. Boasting a robust 630 m³/h extractor and energy efficiency class A+, this model seamlessly merges power with elegance.



GALILEO NG

Class A+++ extractor hob, unique on the market. Cast-iron grille featuring iconic Faber design. Practical, dynamic touch slider controls.



GALILEO LINEAR

With a timelessly elegant vertical stainless steel grid and energy efficiency class A+ with 600 m³/h at boost speed, this model is a harmonious blend of sophistication and performance. Redefine your cooking space with enduring style.



GALILEO SMART

(Class A++) extractor hob. Cast-iron grille featuring iconic Faber design. The mid-range option.



GALILEO SLIM

Sleek and powerful with a compact design, a potent 630 m³/h extractor and energy efficiency class A+, this model sets a new standard for enduring performance.




GALILEO 60

Its versatile and adapts to kitchens of limited dimensions while maintaining high quality and performance.

CHOOSE THE BEST ONE
FOR YOUR NEEDS

GALILEO INSTALLATION KITS


The following kits are compatible with models:
Galileo Glass, Galileo NG, Galileo Smart e Galileo 60

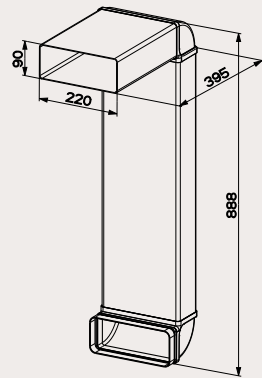

DUCTING KIT SUITABLE FOR ALL GALILEO RANGE*

Ducting kit
cod. 112.0540.782


- 1 x flat duct, 220x90x300 mm
- 2 x vertical 90° bends, 220x90 mm
- 1 x flat duct, 220x90x700 mm
- 1 x duct adapter

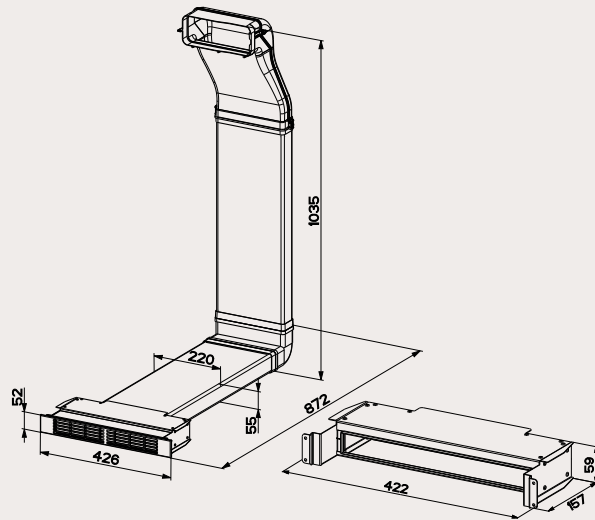

KIT GALILEO 60*

Recycling kit H60
cod. 112.0626.656

- 2 x vertical flanges (rear and front) for connection to the motor
- 1 x flange with seal 220x55 mm
- 2 x flat ducts 220x55x600 mm
- 1 x vertical 90° bend 220 x 55 mm
- Recycling kit H60

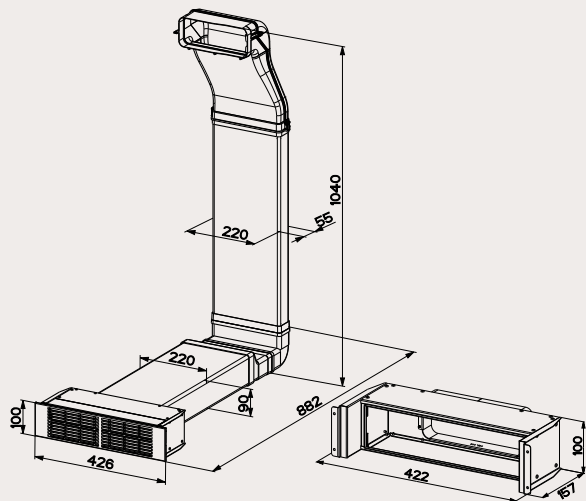

KIT GALILEO 60*





Recycling Kit H100
cod. 112.0626.657

- 2 x vertical flanges (rear and front) for connection to the motor
- 1 x flange with seal 220x55 mm
- 1 flat duct 220x55x600 mm
- 1 x vertical 90° bend 220x55 mm
- 1 x flat reducer 90-55 mm
- 1 x flat duct connector 220x90 mm
- 1 x flat duct 220x90x500 mm
- Recycling Kit H100

* Maximum dimensions of each kit should be adapted according to specific installation requirements, as outlined in the instruction manual available at www.faberspa.com

VENTING HOBS.

To install Galileo venting hobs, you will need to buy the relevant installation kit. Different kits are available, depending on your desired model and configuration, suction or filter. The details of each individual kit, with the components included in the packaging, are outlined below.

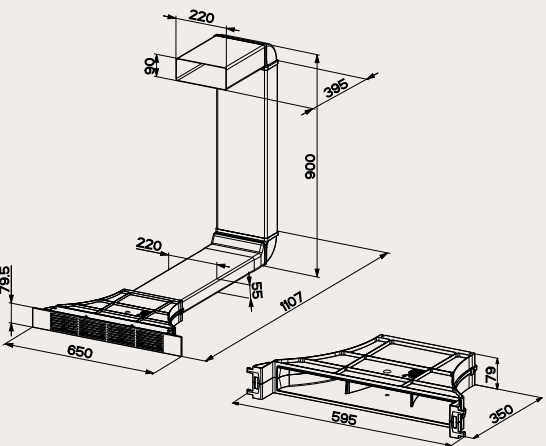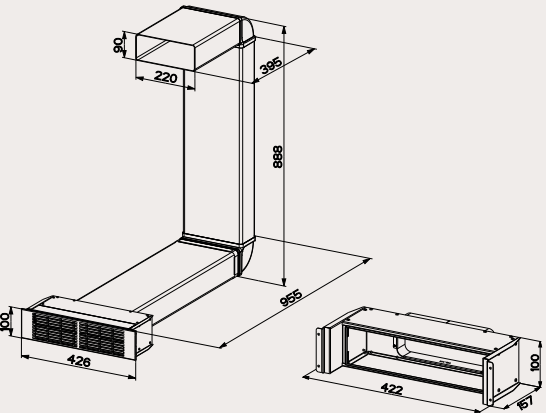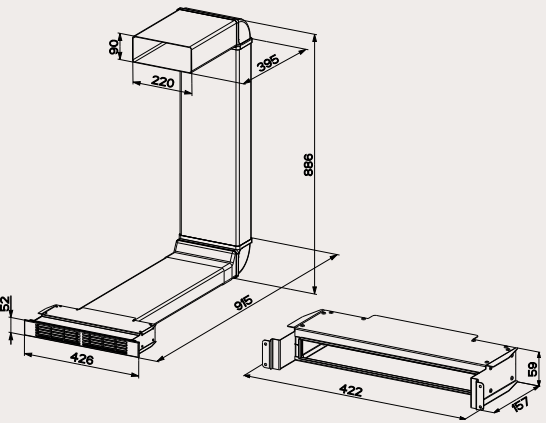

KIT GALILEO 80*

Recycling kit H60
cod. 112.0540.730

- 1 x flat duct 200 x 90 x 300 mm
- 2 x vertical 90° bends 220x90 mm
- 1 x flat duct 200x90x700 mm
- 1 x flat reducer 90-55 mm
- 1 flat duct 220x55x60 mm
- Recycling kit H60

KIT GALILEO 80*

Recycling kit H100
cod. 112.0540.781

- 1 x flat duct 200x90x300 mm
- 2 x vertical 90° bends 220x90 mm
- 2 x flat ducts 200x90x700 mm
- Recycling kit H100

KIT GALILEO 80*

Long lasting Recycling Kit H80
cod. 112.0605.735

- 1 x flat duct 220x90x300 mm
- 2 x vertical 90° bends 220x90 mm
- 1 x flat duct 220x90x700 mm
- 1 x flat reducer 90-55 mm
- 1 flat duct 220x55x60 mm
- LL H80 kit

REAR FILTER KIT SUITABLE FOR ALL GALILEO RANGE*

Recycling Rear Filter
cod. 112.0685.046


- 1 x flat duct 220x90x300 mm
- 2 x filter support
- 1 charcoal filter H96 mm

GALILEO


AIR-DUCT SYSTEM OR EQUIVALENT

The following kits are compatible with models: Galileo Glass, Galileo NG, Galileo Smart e Galileo 60


FLAT DUCT TR 1500 220X55X1500 MM cod. 112.0157.294




ROUND TO RECTANGULAR ADAPTER cod. 112.0157.296




VERTICAL 90° ELBOW BEND cod. 112.0157.298




HORIZONTAL 90° BEND cod. 112.0157.300




RECTANGULAR LOUVRED GRILLE cod. 112.0157.304




HORIZONTAL 90° ELBOW BEND cod. 112.0157.306

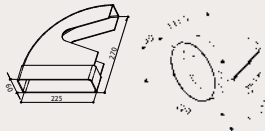


ROUND PIPE TC 1000 cod. 112.0157.308




FLAT DUCT CONNECTOR cod. 112.0157.295




WALL CONNECTOR cod. 112.0157.297




VERTICAL 90° BEND cod. 112.0157.299




RECTANGULAR REDUCTION FITTING 60 MM cod. 112.0557.017




ROUND LOUVRED GRILLE Ø 125 MM cod. 112.0157.303




BRACKET cod. 112.0157.305




RIGHT ANGLE BEND 90° Ø 125 MM cod. 112.0157.307




FLANGE cod. 112.0157.309




FLAT DUCT TR 1200 220X90 MM cod. 112.0459.427

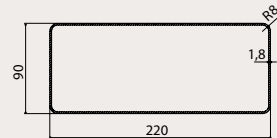


ROUND TO RECTANGULAR ADAPTER 220X90 MM cod. 112.0459.429




VERTICAL 90° BEND 220X90 MM cod. 112.0459.453

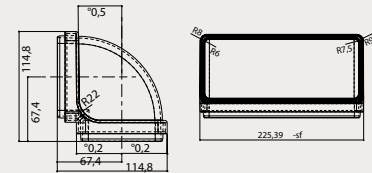


BRACKET 220X90 MM cod. 112.0459.456





FLEXIBLE CONNECTOR RF 600 cod. 112.0280.685




RIGHT ANGLE BEND 90° Ø 150 MM cod. 112.0253.688





FLAT DUCT CONNECTOR 220X90 MM cod. 112.0459.428

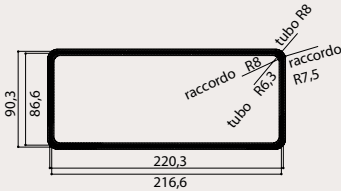


90° ELBOW BEND 220X90 MM cod. 112.0459.451




HORIZONTAL 90° BEND 220X90 MM cod. 112.0459.455




ROUND PIPE TC 1000 Ø 150 MM cod. 112.0253.681



ROUND CONNECTOR Ø 150 MM cod. 112.0253.690



PIPE GRID 220X90 cod. 112.0605.516




GALILEO

INSTALLATION KITS

The following kits are compatible with models: **Galileo Stripes, Galileo Bold, Galileo Linear e Galileo Slim**

To install the new Galileo aspiration hobs in ducted mode, it is necessary to purchase the corresponding installation kit. For the recyrculation mode, a kit with rear outlet is already supplied as standard, but it is also possible to proceed with installation with air outlet from the plinth by purchasing the corresponding installation kit. Below are the details of each individual kit with the components supplied in the installation kits.

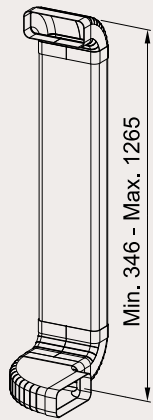


DUCTING KIT

PLINTH AIR OUTLET

cod. 112.0711.356

- 1 90° bend
- 2 90° bend
- 1 rectangular pipe 220x90x1000
- 1 horizontal 90° bend
- 1 adhesive tape

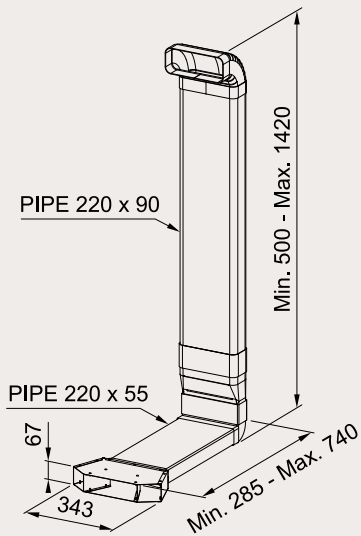


RECYCLING KIT

RECYCLING VERSION INSTALLATION / PLINTH H70

cod. 112.0711.987

- 1 90° bend 220x90
- 1 air diffuser connector 220x55
- 1 90° bend 220x90
- 1 rectangular pipe 220x90x1000
- 1 rectangular pipe connector 220x90
- 1 adhesive tape
- 1 rectangular pipe 220x55x1000
- 1 90° bend 220x55
- 1 rectangular pipes connector 220x55
- 1 rectangular pipes connector 90-55
- 1 air diffuser element

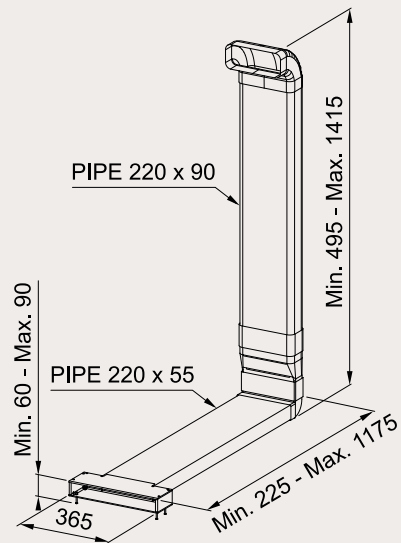

RECYCLING KIT

RECYCLING VERSION INSTALLATION / PLINTH H60

cod. 112.0711.988

- 1 90° bend Naber 220x90
- 1 90° bend 220x90
- 1 rectangular pipe 220x90x1000
- 1 rectangular pipe connector 220x90
- 1 rectangular pipe connector 90-55
- 1 rectangular pipe connector 220x55
- 1 bend 220x55
- 1 rectangular pipe 220x55x1000
- 1 air diffuser element
- 1 adhesive tape




GALILEO

AIR-DUCT SYSTEM OR EQUIVALENT

The following kits are compatible with duction models:
Galileo Stripes, Galileo Bold, Galileo Linear e Galileo Slim


cod. 112.0711.855

Deflector 90°

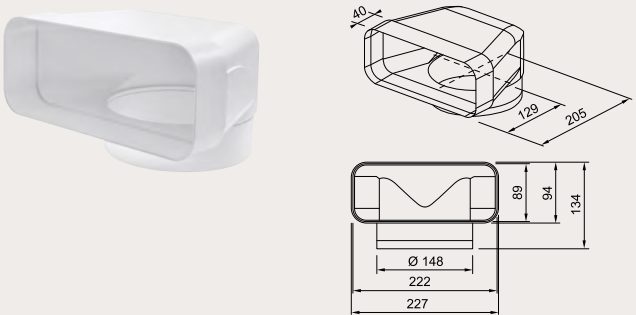

cod. 112.0711.856

Round tube Ø150 L=500 mm

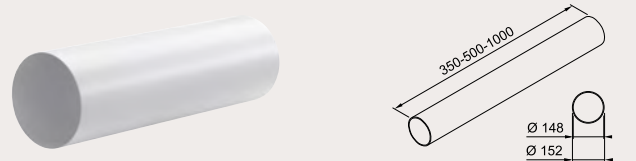


cod. 112.0711.858

Round tube Ø150 L=1000 mm




cod. 112.0711.860

Connector for round tube

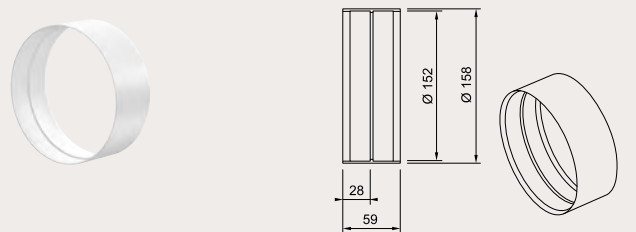


cod. 112.0711.852

Pipe 150 vertical 90° bend

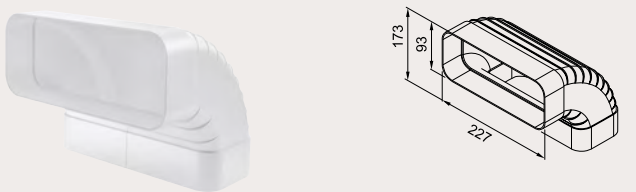


cod. 112.0711.904

Pipe end

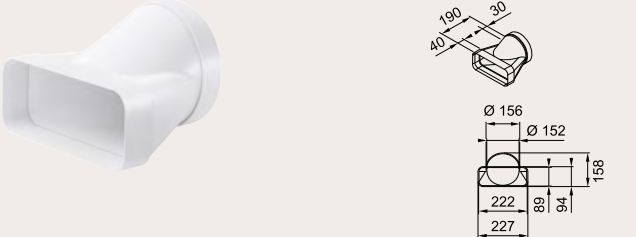

cod. 112.0711.908

Horizontal 15° bend pipe

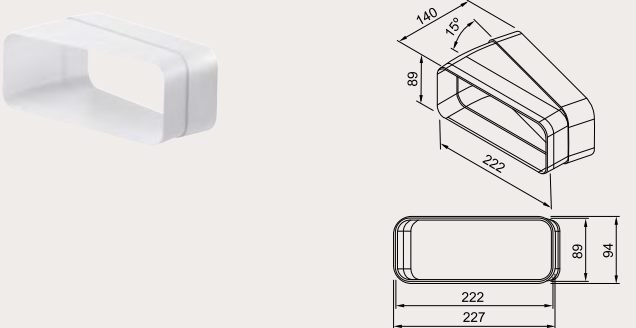


cod. 112.0711.853

90° bend connector




cod. 112.0711.901

90° bend for round pipe 150

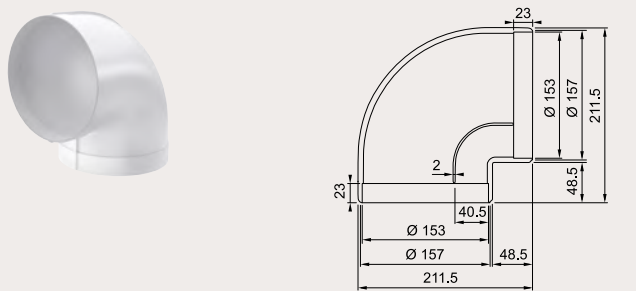


cod. 112.0711.902

System pipe bend 150

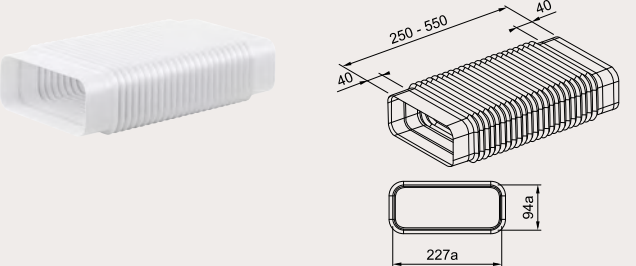


cod. 112.0711.854

Deflector 90°

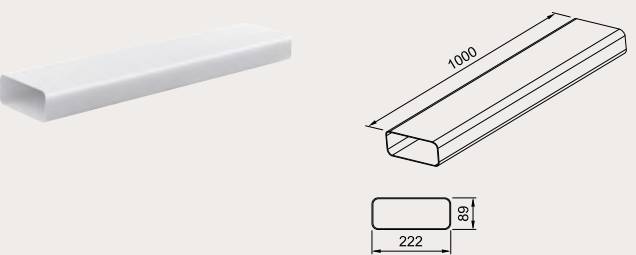


cod. 112.0711.903

Pipe connector

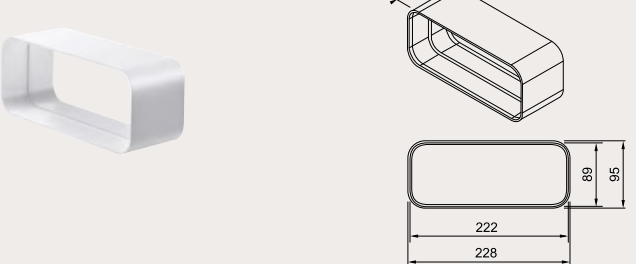


cod. 112.0711.905

External outlet for round pipe with grid

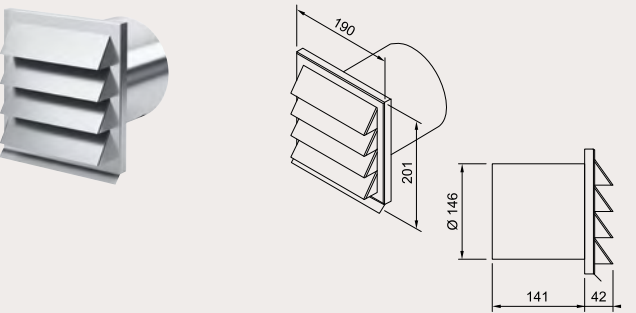

cod. 112.0711.906

External outlet for rectangular pipe with grid

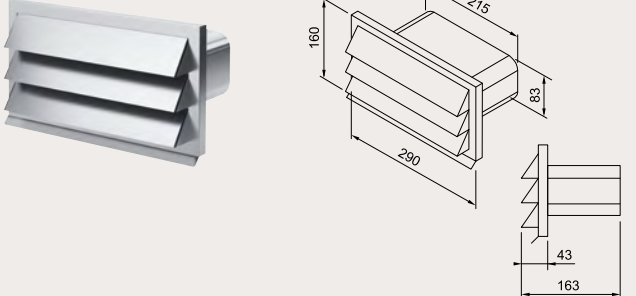

cod. 112.0711.909

PVC tape



GALILEO GLASS



GALILEO GLASS

GALILEO HE BK GLASS NG A83 cod. 340.0679.890



FEATURES HOOD		PERFORMANCE HOOD						
Finish • Black matt glass / Design glass grid		Speed	1	2	3	8	INT	BOOST
Controls Touch slider		Air capacity IEC point	230	270	320	470	510	620
Grease filter Cassettes dishwasher safe		Pressure	300	430	620	650	660	650
Ø of air outlet 220x90 mm		Input	50	30	60	130	170	220
Energy class A+		Noise level	51	56	60	67	69	73
Suction speed 6.6 m/s								




FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish • Black glass		Flexi zones	2
Product dimensions LxW (mm) 830x520		Power setting (stages)	9
Induction zone 4 2100-3700 W single 4200-7400 W flexi		Timer min-max	1-59 min.
Induction zone dimensions (mm) 230x210 single 460x210 flexi		Booster (P)	Yes
Controls Touch slider		Auto switch off	Yes
Power (W) 7400		Over temperature protection	Yes
Voltage (V) 220-240		Over current or voltage abnormality protection	Yes
Frequency (HZ) 50/60		Container detection system	Yes
		Automatic shutdown protection	Yes
		Power On indicator	Yes
		Childlook	Yes






GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION

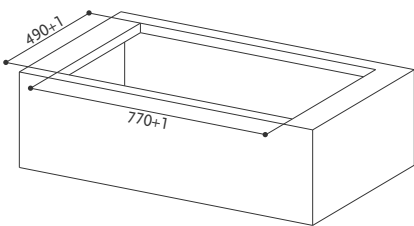

FLUSH FIT INSTALLATION

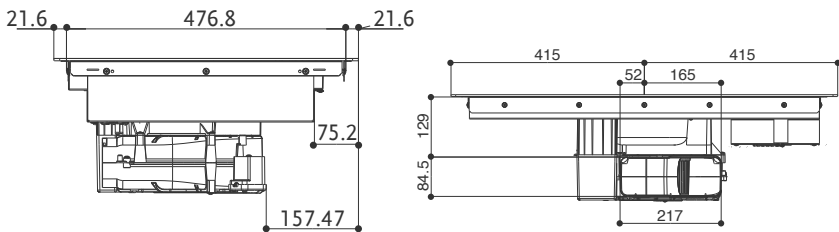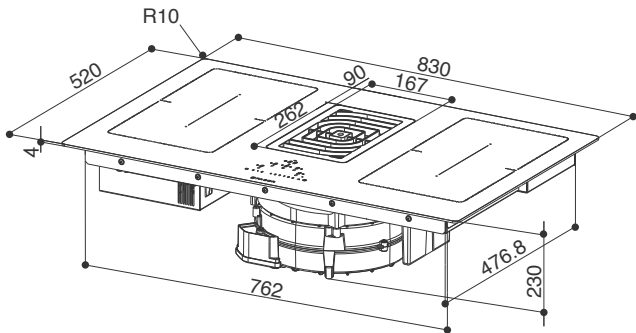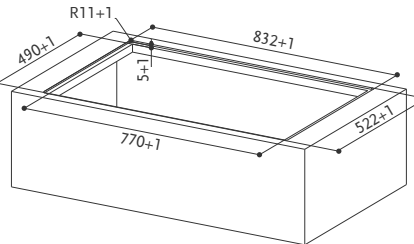

ALWAYS COMBINE TO HOB EXTRACTOR 1 OF THE 3 INSTALLATION KIT:

Ducting

cod. 112.0540.782



Rear ducting version installation



Lateral ducting version installation

Recycling

cod. 112.0540.730 60 - 80 mm height skirting board
cod. 112.0540.781 100 mm height skirting board
cod. 112.0685.046 Rear filtering kit



Front recycling version installation 60H and H100











GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION

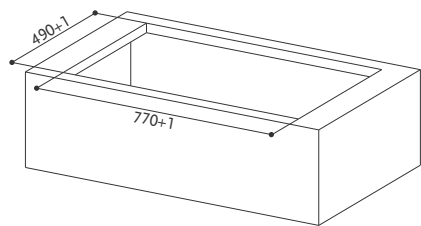

FLUSH FIT INSTALLATION

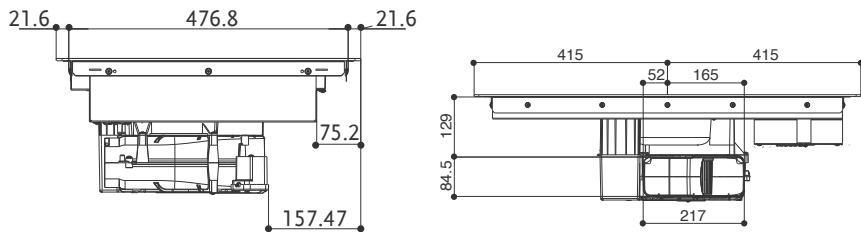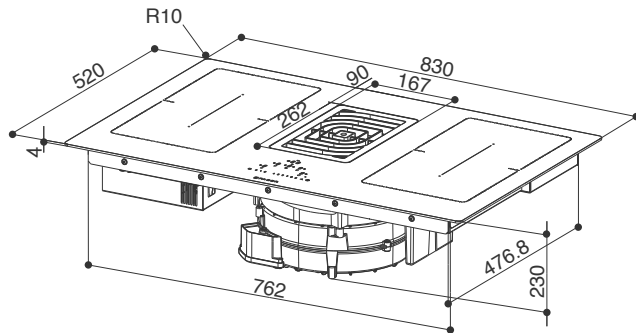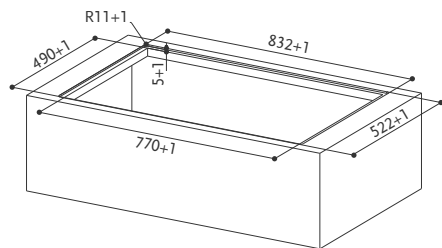

ALWAYS COMBINE TO HOB EXTRACTOR 1 OF THE 3 INSTALLATION KIT:

Ducting

cod. 112.0540.782



Rear ducting version installation



Lateral ducting version installation

Recycling

cod. 112.0540.730 60 - 80 mm height skirting board
cod. 112.0540.781 100 mm height skirting board
cod. 112.0685.046 Rear filtering kit



Front recycling version installation 60H and H100



GALILEO

GALILEO BK GLASS NG A830 cod. 340.0594.624



Discover the product video
on our YouTube channel



FEATURES HOOD		PERFORMANCE HOOD						
Finish	• Black glass / Cast iron grid	Speed	1	2	3	8	INT	BOOST
Controls	Touch slider	Air capacity IEC point	245	285	350	505	550	700
Grease filter	Cassettes dishwasher safe	Pressure	290	370	525	550	555	560
Ø of air outlet	220x90 mm	Input	35	45	65	130	140	220
Energy class	A+++	Noise level	51	55	57	65	66	72
Suction speed	6.6 m/s							



FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish	• Black glass	Flexi zones	2
Product dimensions LxW (mm)	830x520	Power setting (stages)	9
Induction zone	4 2100-3700 W single 4200-7400 W flexi	Timer min-max	1-59 min.
Induction zone dimensions (mm)	230x210 single 460x210 flexi	Booster (P)	Yes
Controls	Touch slider	Auto switch off	Yes
Power (W)	7400	Over temperature protection	Yes
Voltage (V)	220-240	Over current or voltage abnormality protection	Yes
Frequency (HZ)	50/60	Container detection system	Yes
		Automatic shutdown protection	Yes
		Power On indicator	Yes
		Childlook	Yes


GALILEO STRIPES








GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION

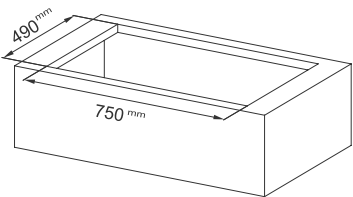

FLUSH FIT INSTALLATION

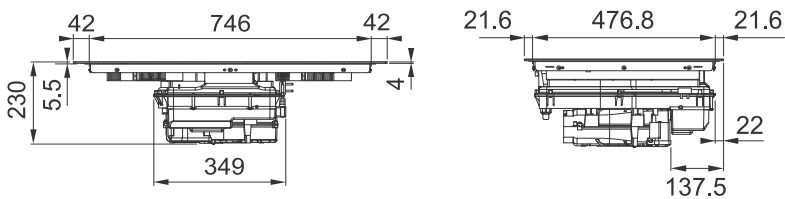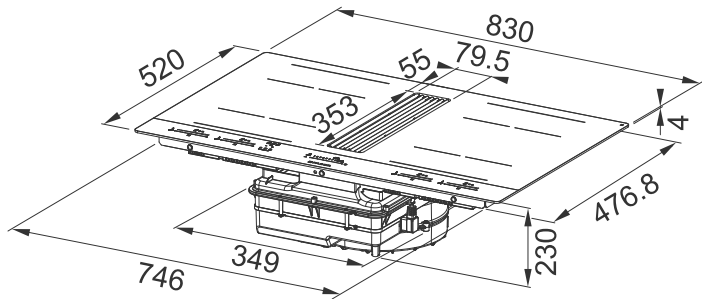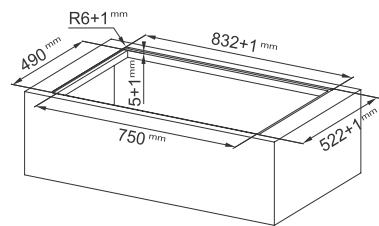

INSTALLATION KITS:

Ducting



Lateral ducting version installation
cod. 112.0711.356

Recycling



Rear ducting version installation
included in the recycling version
cod. 340.0708.969



Front recycling version installation/plinth min. 60H
cod. 112.0711.988



Lateral recycling version installation/ plinth min. 70H
cod. 112.0711.987

GALILEO STRIPES

GALILEO STRIPES A830 cod. 340.0708.968 - ducting version
GALILEO STRIPES F830 cod. 340.0708.969 - recycling version



FEATURES HOOD		PERFORMANCE HOOD		
Finish • Black grid with stainless steel strips		Speed	1	9 BOOST
Controls Touch slider white digits		Air capacity IEC point	210	450 600
Grease filter Cassettes dishwasher safe		Pressure	270	640 670
Ø of air outlet 220x90 mm		Input	60	170 220
Energy class A+		Noise level	49	67 72
Suction speed 9,97 m/s				



FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish • Black glass / Matt Black glass		Flexi zones	2
Product dimensions LxW (mm) 830x520		Power setting (stages)	9
Induction zone 4 octagonal: 210x190 mm (2100W - Boost 3000W)		Timer min-max	1-59 min.
Induction zone dimensions (mm) 210x190 single 380x210 flexi		Booster (P)	Yes
Controls Touch slider white digits		Auto switch off	Yes
Power (W) 7400		Over temperature protection	Yes
Voltage (V) 220-240		Over current or voltage abnormality protection	Yes
Frequency (HZ) 50/60		Container detection system	Yes
		Automatic shutdown protection	Yes
		Power On indicator	Yes
		Childlook	Yes
		Power management	Yes

ADJUSTABLE ABSORPTION SETTING ON 4 POWER LEVELS (KW)
• 2,8 • 4,5
• 3,5 • 7,4

GALILEO SMART



GALILEO SMART

GALILEO SMART BK F830 + KIT LL H80 cod. 340.0605.734 (integrated recycling kit)
GALILEO SMART BK GLASS A830 cod. 340.0577.694



FEATURES HOOD		PERFORMANCE HOOD						
Finish	• Black glass / Cast iron grid	Speed	1	2	3	8	INT	BOOST
Controls	Touch control	Air capacity IEC point	245	285	350	505	550	700
Grease filter	Cassettes dishwasher safe	Pressure	290	370	525	550	555	560
Ø of air outlet	220x90 mm	Input	35	45	65	130	140	220
Energy class	A++	Noise level	51	55	57	65	66	72
Suction speed	6.6 m/s							



FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish	• Black glass	Flexi zones	2
Product dimensions LxW (mm)	830x520	Power setting (stages)	9
Induction zone	4 2100-3000 W single 3000-3700 W flexi	Timer min-max	1-59 min.
Induction zone dimensions (mm)	210x190 single 210x390 flexi	Booster (P)	Yes
Controls	Touch control	Auto switch off	Yes
Power (W)	7400	Over temperature protection	Yes
Voltage (V)	220-240	Over current or voltage abnormality protection	Yes
Frequency (HZ)	50/60	Container detection system	Yes
		Automatic shutdown protection	Yes
		Power On indicator	Yes
		Childlook	Yes
		Power management	Yes


ADJUSTABLE ABSORPTION SETTING ON 4 POWER LEVELS (KW)

- 2,8
- 3,5
- 4,5
- 7,4







GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION

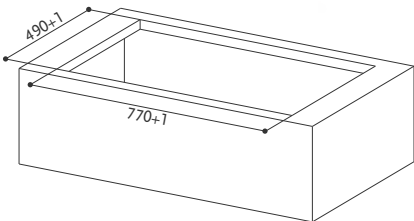

FLUSH FIT INSTALLATION

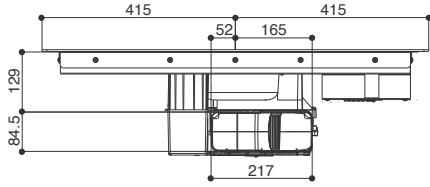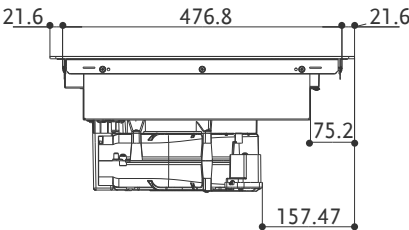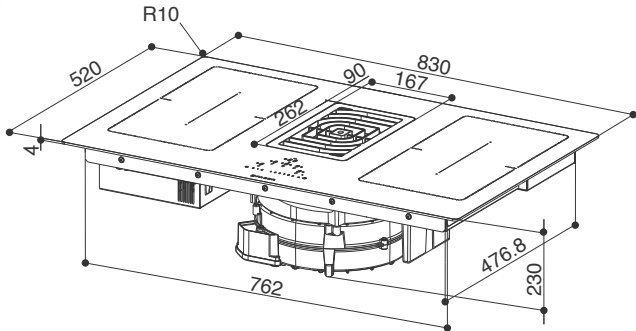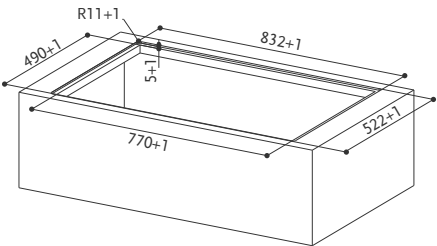

ALWAYS COMBINE TO GALILEO SMART BK cod. 340.0577.694
1 OF THE 3 INSTALLATION KIT:

Ducting

cod. 112.0540.782



Rear ducting version
installation



Lateral ducting version
installation

Recycling

cod. 112.0540.730 60 - 80 mm height plinth
cod. 112.0540.781 100 mm height plinth
cod. 112.0685.046 Rear filtering kit



Front recycling version installation
60H and H100



GALILEO SMART BK F830 +
KIT LL H80 cod. 340.0605.734
INCLUDES LONG LASTING
FILTERING KIT



Front recycling version
installation H80

More specifications in the accessory pages.



GALILEO BOLD







GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION

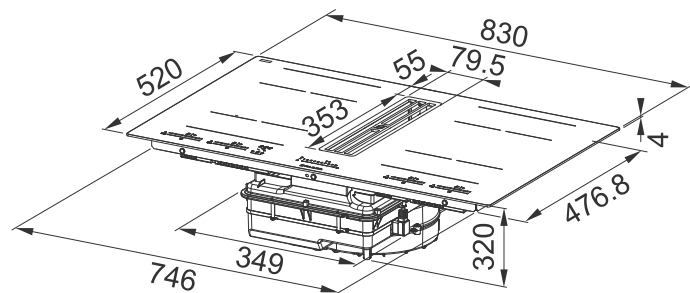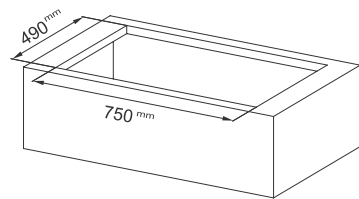

FLUSH FIT INSTALLATION

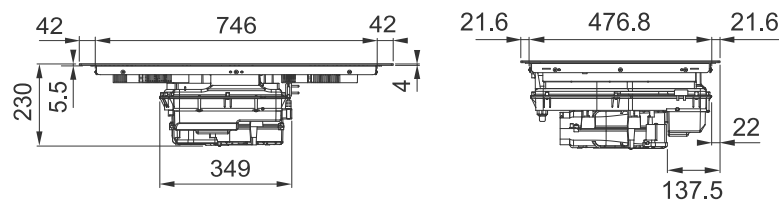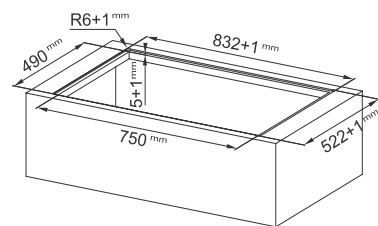

INSTALLATION KITS:

Ducting



Lateral ducting version installation
cod. 112.0711.356

Recycling



Rear ducting version installation
included in the recycling version
cod. 340.0708.971

Front recycling version installation/ plinth min. 60H
cod. 112.0711.988

Lateral recycling version installation/ plinth min. 70H
cod. 112.0711.987

GALILEO BOLD

GALILEO BOLD A830 cod. 340.0708.973 - ducting version
GALILEO BOLD F830 cod. 340.0708.971 - recycling version



FEATURES HOOD		PERFORMANCE HOOD		
Finish • Steel grid		Speed	1	9 BOOST
Controls Touch slider red digits		Air capacity IEC point	230	500 630
Grease filter Cassettes dishwasher safe		Pressure	280	620 630
Ø of air outlet 220x90 mm		Input	40	170 220
Energy class A+		Noise level	49	68 73
Suction speed 9,10 m/s				



FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish • Black glass		Flexi zones	2
Product dimensions LxW (mm) 830x520		Power setting (stages)	9
Induction zone 4 octagonal: 210x190 mm (2100W - Boost 3000W)		Timer min-max	1-59 min.
Induction zone dimensions (mm) 210x190 single 380x210 flexi		Booster (P)	Yes
Controls Touch slider red digits		Auto switch off	Yes
Power (W) 7400		Over temperature protection	Yes
Voltage (V) 220-240		Over current or voltage abnormality protection	Yes
Frequency (HZ) 50/60		Container detection system	Yes
		Automatic shutdown protection	Yes
		Power On indicator	Yes
		Childlook	Yes
		Power management	Yes

ADJUSTABLE ABSORPTION SETTING ON 4 POWER LEVELS (KW)

- 2,8
- 3,5
- 4,5
- 7,4

GALILEO LINEAR



ASPIRATION HOB







GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION

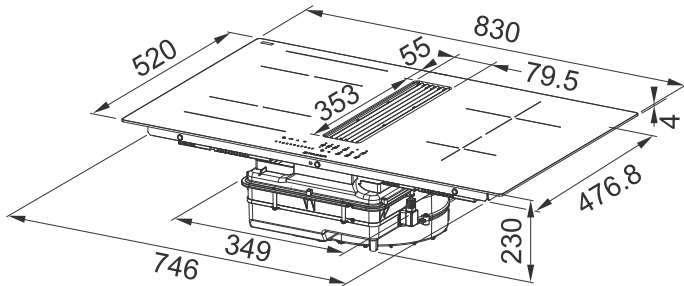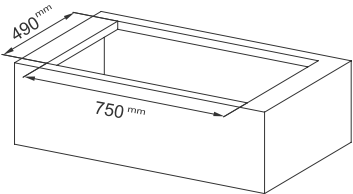

FLUSH FIT INSTALLATION

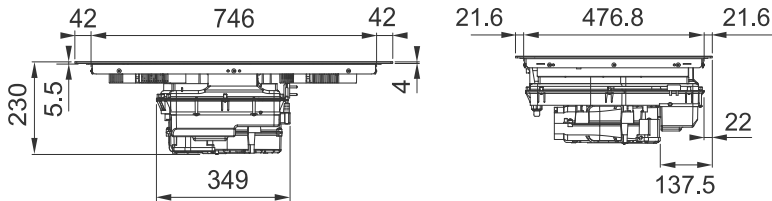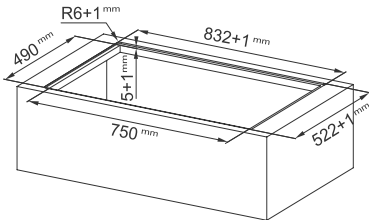

INSTALLATION KITS:

Ducting



Lateral ducting version installation
cod. 112.0711.356

Recycling



Rear ducting version installation
included in the recycling version
cod. 340.0708.970



Front recycling version installation/ plinth min. 60H
cod. 112.0711.988



Lateral recycling version installation/ plinth min. 70H
cod. 112.0711.987

GALILEO LINEAR

GALILEO LINEAR A830 cod. 340.0708.972 - ducting version
GALILEO LINEAR F830 cod. 340.0708.970 - recycling version



FEATURES HOOD		PERFORMANCE HOOD		
Finish • Black grid		Speed	1	9 BOOST
Controls Touch slider red digits		Air capacity IEC point	210	450 600
Grease filter Cassettes dishwasher safe		Pressure	270	640 670
Ø of air outlet 220x90 mm		Input	50	170 220
Energy class A+		Noise level	49	67 72
Suction speed 9,96 m/s				



FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish • Black glass		Flexi zones	2
Product dimensions LxW (mm) 830x520		Power setting (stages)	9
Induction zone 4 2 octagonal 210x190 mm (2100W: Boost 3000W) 1 rounded Ø200 (2300W: Boost 3000W) 1 rounded Ø145 (1400: Boost 1850W)		Timer min-max	1-59 min.
Induction zone dimensions (mm) 210x190 single 380x210 flexi		Booster (P)	Yes
Controls Touch slider red digits		Auto switch off	Yes
Power (W) 7400		Over temperature protection	Yes
Voltage (V) 220-240		Over current or voltage abnormality protection	Yes
Frequency (HZ) 50/60		Container detection system	Yes
		Automatic shutdown protection	Yes
		Power On indicator	Yes
		Childlook	Yes
		Power managment	Yes

ADJUSTABLE ABSORPTION SETTING ON 4 POWER LEVELS (KW)

- 2,8
- 3,5
- 4,5
- 7,4

GALILEO 60



GALILEO 60

GALILEO SMART BK F600 + KIT LL H80 cod. 340.0627.228 (integrated recycling kit)
GALILEO SMART BK A600 cod. 340.0627.227



FEATURES HOOD		PERFORMANCE HOOD										
Finish • Black glass / Steel grid		Speed										
Controls Touch control		Air capacity IEC point										
Grease filter Cassettes dishwasher safe		Pressure										
Ø of air outlet 220x55 mm		Input										
Energy class A++		Noise level										
Suction speed 8.8 m/s												




FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish • Black glass		Flexi zones	
Product dimensions LxW (mm) 600x520		Power setting (stages)	
Induction zone 4 2100-3000 W single 3000-3700 W flexi		Timer min-max	
Induction zone dimensions (mm) 210x190 single 210x390 flexi		Booster (P)	
Controls Touch control		Auto switch off	
Max Power (W) 7400		Over temperature protection	
Voltage (V) 220-240		Over current or voltage abnormality protection	
Frequency (HZ) 50/60		Container detection system	
ADJUSTABLE ABSORPTION SETTING ON 4 POWER LEVELS (KW)		Automatic shutdown protection	
		Power On indicator	
		Childlook	
		Power managemnt	


- 2,8
- 3,5
- 4,5
- 7,4





GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

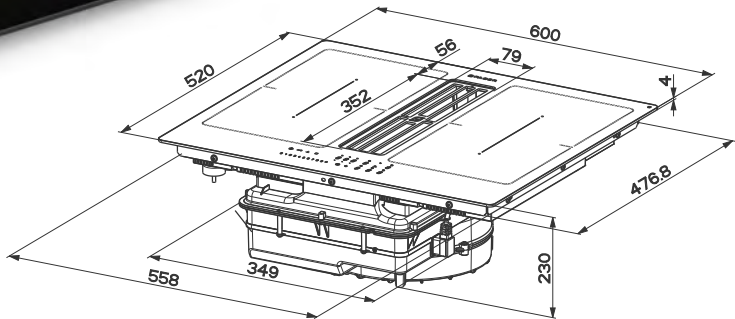

STANDARD INSTALLATION



FLUSH FIT INSTALLATION

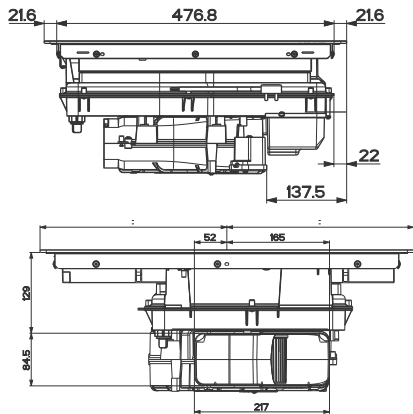

ALWAYS COMBINE TO GALILEO SMART BK A600
cod. 340.0627.227 1 OF THE 3 INSTALLATION KIT:

Ducting

cod.112.0540.782



Rear ducting version
installation



Lateral ducting version
installation

Recycling

cod. 112.0626.657 - 100 mm height plinth
cod. 112.0626.656 - 60-80 mm height plinth
cod. 112.0685.046 Rear filtering kit



Front recycling version installation
60H and H100



GALILEO SMART BK F600 + KIT
LL H80 cod. 340.0627.228
INCLUDES LONG LASTING
FILTERING KIT




Front recycling version installation
H80

ulteriori specifiche nelle sessione accessori


GALILEO SLIM





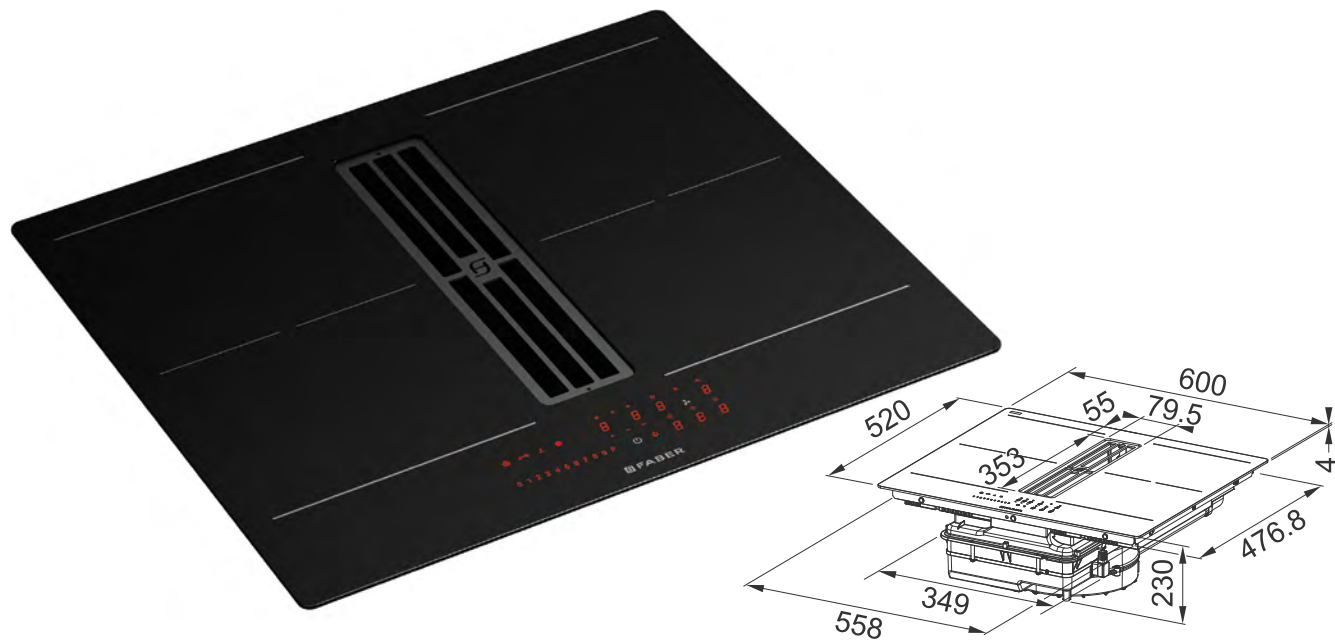


GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION



FLUSH FIT INSTALLATION

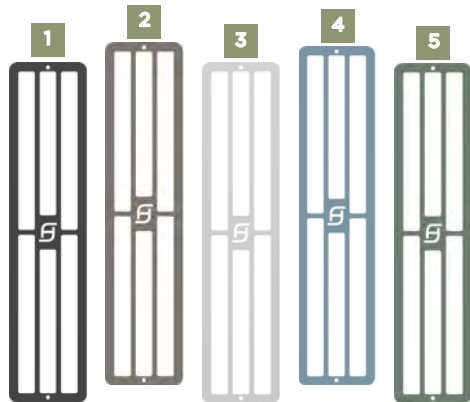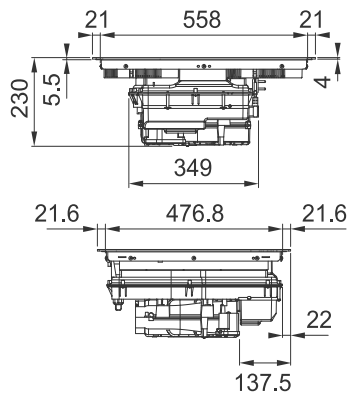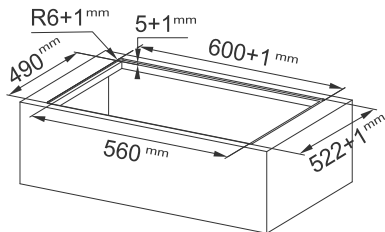

In the Galileo Slim model, the black grid is always included. Additionally, you have the option to personalize further as the grid is available in five additional stunning colors.

- 1 112.0717.358 KIT GRID DARK GREY MATT
- 2 112.0717.359 KIT GRID TITANIUM MATT
- 3 112.0717.374 KIT GRID GREY ALUMINIUM MATT
- 4 112.0717.360 KIT GRID DUSTY BLUE MATT
- 5 112.0717.361 KIT GRID DUSTY GREEN MATT

KIT INSTALLAZIONE:

Ducting



Lateral ducting version installation
cod. 112.0711.356

Recycling



Rear ducting version installation
included in the recycling version
cod. 340.0708.974



Front recycling version installation/ plinth min. 60H
cod. 112.0711.988



Lateral recycling version installation/ plinth min. 70H
cod. 112.0711.987

GALILEO SLIM

GALILEO SLIM A600 cod. 340.0708.975 - ducting version
GALILEO SLIM F600 cod. 340.0708.974 - recycling version



FEATURES HOOD		PERFORMANCE HOOD		
Finish • Metal grid (5 different colour)		Speed	1	9 BOOST
Controls Touch slider red digits		Air capacity IEC point	230	500 630
Grease filter Cassettes dishwasher safe		Pressure	280	620 630
Ø of air outlet 220x55 mm		Input	40	170 220
Energy class A+		Noise level	49	68 73
Suction speed 9,10 m/s				



FEATURES INDUCTION HOB		FUNCTIONS INDUCTION HOB	
Finish • Black glass		Flexi zones	2
Product dimensions LxW (mm) 600x520		Power setting (stages)	9
Induction zone 4 octagonal: 210x190 mm (2100W - Boost 3000W)		Timer min-max	1-59 min.
Induction zone dimensions (mm) 210x190 single 380x210 flexi		Booster (P)	Yes
Controls Touch slider red digit		Auto switch off	Yes
Power (W) 7400		Over temperature protection	Yes
Voltage (V) 220-240		Over current or voltage abnormality protection	Yes
Frequency (HZ) 50/60		Container detection system	Yes
		Automatic shutdown protection	Yes
		Power On indicator	Yes
		Childlook	Yes
		Power management	Yes


ADJUSTABLE ABSORPTION SETTING ON 4 POWER LEVELS (KW)	
• 2,8	• 4,5
• 3,5	• 7,4

AIR TREATMENT

AIR HUB CEILING	99
AIR HUB VERTICAL	98
K-AIR	103

AIR HUB VERTICAL



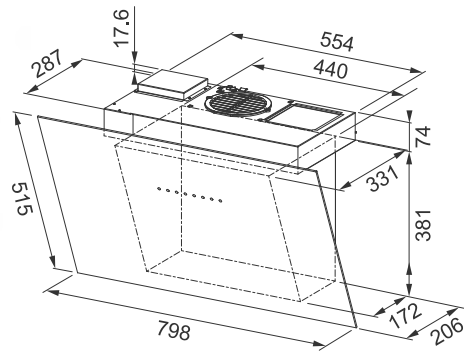


AIR HUB VERTICAL

AIR HUB VERTICAL BK F80 cod. 330.0676.814



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Black glass	Speed	1	2	3	INT	Cod. 112.0674.373
Controls Touch control	Air capacity IEC point	300	430	620	770	Ducting kit Air Hub Vertical
Lighting 2 LED lights	Pressure	460	550	590	600	Cod. 112.0157.240
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	F8 Charcoal filter
Ø of air outlet 150 mm	Noise level	48	56	63	68	Cod. 112.0158.127
Width 800 mm						FHP8 Charcoal filter High Performance
Energy class A+						Cod. 112.0185.278
						FLL8 Charcoal filter Long Lasting

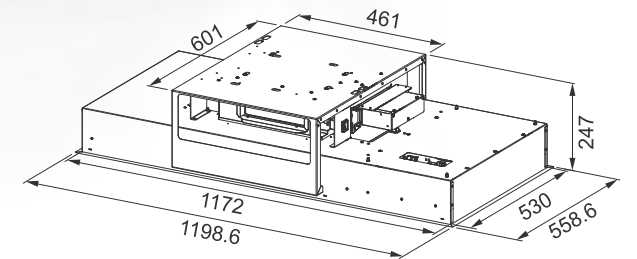

AIR HUB CEILING

HEAVEN LIGHT PRO A120 X AH cod. 350.0680.092



FEATURES	PERFORMANCE						ACCESSORIES
Finish • Stainless steel	Speed	1	2	3	INT	BOOST	Cod. 112.0471.608 F18-90 Charcoal filter
Controls Electronic Led	Air capacity IEC point	190	350	400	530	700	
Lighting 2 LED lights	Pressure	160	480	490	500	510	
Grease filter Cassettes dishwasher safe	Input	15	60	85	220	250	
Ø of air outlet 150 mm	Noise level	43	58	60	66	72	
Width 1200							
Energy class A+							




K-AIR

TECHNOLOGICAL PLUS



MOBILE APP VIA FABER CLOUD
Mobile APP via Faber Cloud keeps you informed through the dedicated app when it reaches unsafe conditions, allowing remote control too.



AIR QUALITY INDICATOR
constantly monitors Indoor Air Quality in your kitchen.



AUTO FUNCTION
it automatically sets and controls the aspiration phase to remove pollution and restore fresh air in your kitchen.



RECIPIES PLAY VIDEO
Full web browser and audio di users. Hear your favourite music or cooking assistant THROUGH (non true!) video recipes.



FULLY INTEGRATED WHIT AMAZON ALEXA
Use voice control to switch on/off the hood, set aspiration level and control the lights.



CONNECTED TO YOUR HOME ADDITIONAL DEVICE
Connect your wi-fi / IP remote cameras. Always visible directly into your hood monitor.



MULTIPLE TIMER
Multiple Timer management.




SHOW YOUR FAVORITE
Your favourite picture slideshow in the Kitchen.



TOUCH MONITOR 21.5
21.5 inches touch display.



TUNABLE WHITE
Set dimmerable white LED intensity.

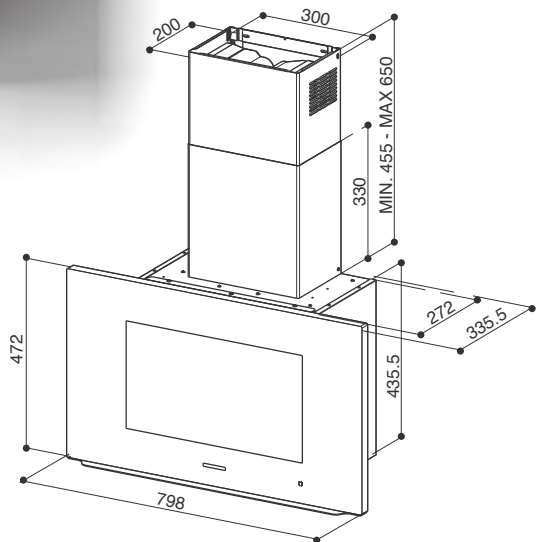

K-AIR

K-AIR TOUCH KL A80 cod. 330.0615.671



FEATURES	PERFORMANCE	ACCESSORIES
Finish • Black glass	Speed 1 2 3 INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Touch control	Air capacity IEC point 280 400 580 740	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting LED lights	Pressure 450 510 550 560	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe	Input 150 200 240 250	Cod. 112.0676.782 Remote control
Ø of air outlet 150 / 120 mm	Noise level 48 55 62 67	Cod. 112.0252.439 Recycling version kit WH
Width 800 mm		Cod. 112.0252.442 Recycling version kit BK
Energy class A		

The form and precious materials of our wall hood designs have been carefully studied to be visually pleasant and to last over time. They utilise powerful motorisation and refined aspiration systems to guarantee clean air and silence.


Our hoods provide useful special functions for a clean environment, to keep your home under control, to leave you free to manage creativity in your kitchen.

WALL

BEAT WALL	113	PREMIO CORNER/SP	181
BEAT XL WALL	109	PURE BLACK	127
BELLA SILENCE	174	RANCH	204
CHLOÈ	191	RANCH CORNER	205
CHLOÈ XL	193	RAY	180
CYLINDRA	185	SOFT EDGE	131
CYLINDRA GLOSS PLUS	184	SOLARIS	183
DAISY PLUS	165	STILO CORNER	182
ECLIPSE	186	STILO COMFORT	175
FOOD SET	198	STILO DX-SX	178
GLAM-FIT	153	STILO GLASS SMART	176
GLAM FIT ZERO DRIP	143	STILO SMART	177
GLAM FIT ZERO DRIP PLUS	135	T-DARK	173
GLAM-LIGHT	157	TALÌKA	147
GLAM LIGHT ZERO DRIP	141	TENDER	200
GLAM LIGHT ZERO DRIP PLUS	137	THEA	197
GREXIA	161	TRUE BLACK	126
KIT MENSOLA	199	TRUE DOUBLE BLACK	123
LITHOS	187	TWEET	164
MODULAR	119	VALUE	201
NICE	179	VEIL	149
ONYX-T	169	WEST	203

BEAT XL WALL



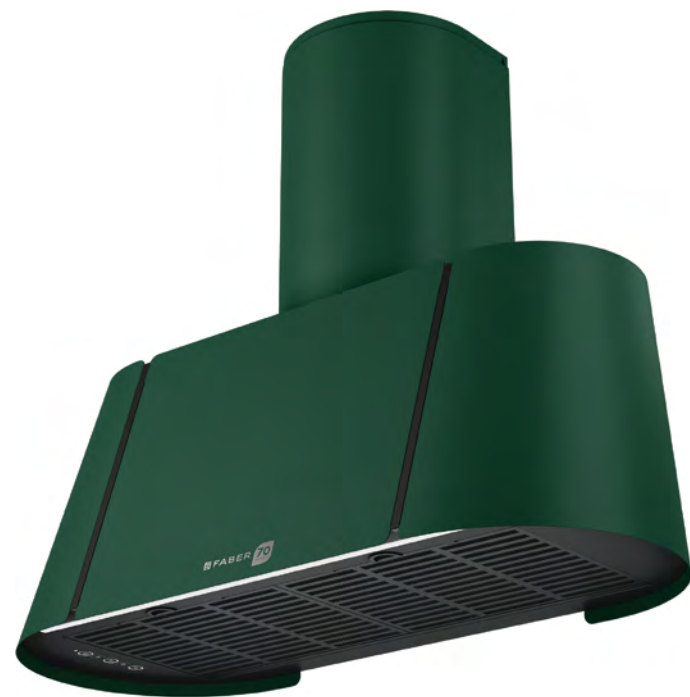

NEW

Dark Forest



Black matt




White matt




The Beat XL Wall hood is supplied without a chimney. Purchase the accessory separately for exhaust mode installation.

DESIGN TAKES CENTRE STAGE

The new Beat XL Wall seamlessly combines the proportions of the 80 cm XL version, with the practicality of a wall-mounted installation. Ideal for those looking for a strong visual impact, the Beat XL Wall is a spectacular element that furnishes with style, enhancing the kitchen with its presence, without any sacrifice of the design appearance.

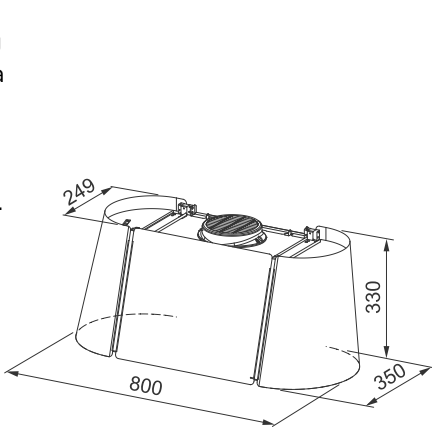

Version without chimney.

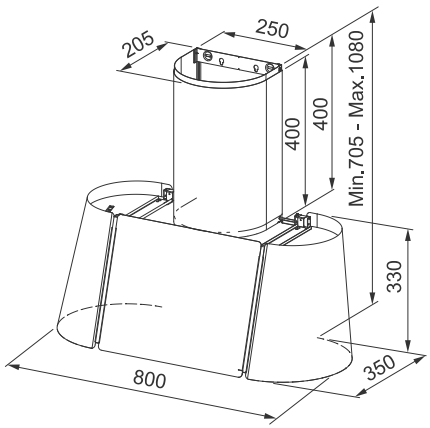

Version with chimney.
Please note that the chimney is sold separately.

WALL

BEAT XL WALL

BEAT XL WALL BK MATT F80 cod. 335.0729.327
BEAT XL WALL WH MATT F80 cod. 335.0729.326

BEAT XL WALL DF/BK MATT KL F80 cod. 335.0740.251*



CARATTERISTICHE	PERFORMANCE					ACCESSORIES
Finish • Black matt • White matt • Dark Forest / Black matt	Speed	1	2	3	BOOST	Cod. 112.0729.875 Kit Chimney Beat XL Wall Black matt
Comandi Touch Metal	Air capacity IEC point	250	390	570	720	Cod. 112.0729.876 Kit Chimney Beat XL Wall White matt
Lighting LED light bar	Pressure	490	570	600	610	Cod. 112.0741.602 Kit Chimney Beat XL Wall Dark Forest
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0676.782 Remote control
Ø of air outlet 150/120 mm	Noise level	47	54	63	68	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Width 800 mm						Cod. 112.0158.127 FHP8 Cartuccia carbone attivo High Performance
Energy class A						Cod. 112.0157.240 F8 Charcoal filter

BEAT WALL





NEW

Dark Forest



Black matt




White matt



EVERYDAY ELEGANCE.

The Beat Wall hood is a perfect marriage of freshness and compact dimensions. The shades of matt black and white, alternated with the steel finishes, lend a touch of elegance to everyday moments.

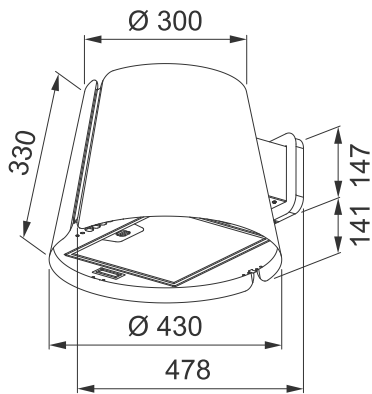

WALL

BEAT WALL

BEAT WALL F42 BK MATT cod. 335.0689.673
BEAT WALL F42 WH MATT cod. 335.0689.675

BEAT WALL F42 DF/BK MATT cod. 335.0740.239



FEATURES	PERFORMANCE				ACCESSORIES
Finish • Black matt • White matt • Dark Forest / Black matt	Speed	1	2	3 INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Electronic	Air capacity IEC point	270	410	580 740	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting 2 LED lights	Pressure	450	540	570 580	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe	Input	150	200	240 250	
Noise level		53	59	66 70	
Ø of air outlet 150 mm					
Width 478 mm					
Energy class A					

MODULAR



FABER MODULAR HOOD

FLEXIBLE DESIGN FOR KITCHEN PRECISION

To perfect recipes and serve an unforgettable ambience for guests, you need kitchen appliances that go above and beyond. That's why Faber has created the Modular hood offering distinct elegance and a storage solution which can be adapted to your exact needs. A perfect addition to any industrial kitchen.



DESIGNED FOR YOU

Individual 60cm modules allow you to install the central module featuring hood, as well as your choice of additional shelving modules depending on your kitchen specification and desire.

SWITCHED ON STYLE

Thanks to a flush LED bar complete with touch control and dimmer function, you can ensure perfect illumination of the worktop when cooking and soft light for an intimate atmosphere when entertaining guests.

EMBRACE SPACE

Open smoke-grey glass shelves with Matt Black frames provide a contemporary look for your kitchen and additional storage space, removing need for extra cabinets.

POWERFUL PERFORMANCE

Faber modular delivers an exceptional 720 m³/h extraction performance in intensive mode and can be installed in extraction and recycling mode to suit your ventilation preferences and kitchen design.



1 OPTION
SINGLE HOOD MODULE




2 OPTION
SINGLE HOOD MODULE
+ 1 SHELF MODULE




3 OPTION
SINGLE HOOD MODULE
+ 2 SHELVES MODULE



HOOD MODULE

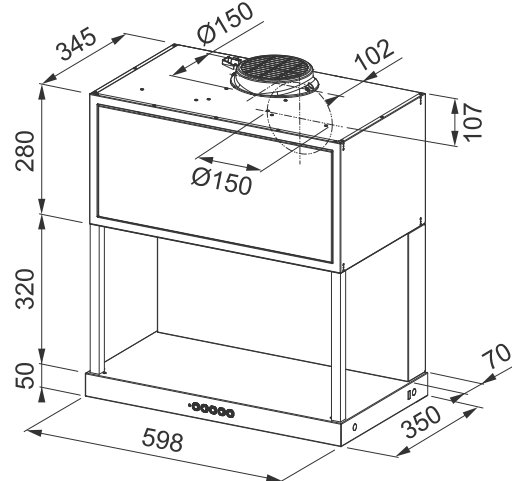

SHELF MODULE

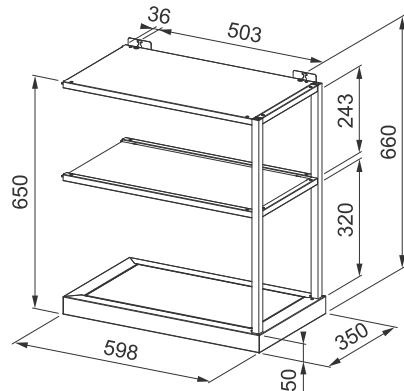

WALL

MODULAR

MODULAR F60 BK MATT cod. 335.0706.645



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0706.647
• Black matt		Air capacity IEC point	290	440	620	720	Shelf Module 60 cm
Controls		Pressure	480	540	570	590	Cod. 112.0157.240
Touch control		Input	150	200	240	250	F8 Charcoal filter
Lighting		Noise level	48	57	64	68	Cod. 112.0158.127
LED light bar							FHP8 Charcoal filter High Performance
Grease filter							Cod. 112.0185.278
Cassettes dishwasher safe							FLL8 Charcoal filter Long Lasting
Ø of air outlet							
150 / 120 mm							
Width							
600 mm							
Energy class							
A							


TRUE DOUBLE BLACK





THE NEW ANGLE
ON BLACK.

Enhanced cooking fume extraction, simpler cleaning and maintenance and more light in the cooking area. The new body angle lends this splendid Faber hood considerable advantages, but it's the design that will win you over. There's a strong contrast between glossy black glass rear panel and Matt black front panel, with a sophisticated and highly modern visual effect. With True Double Black, black has double the power.

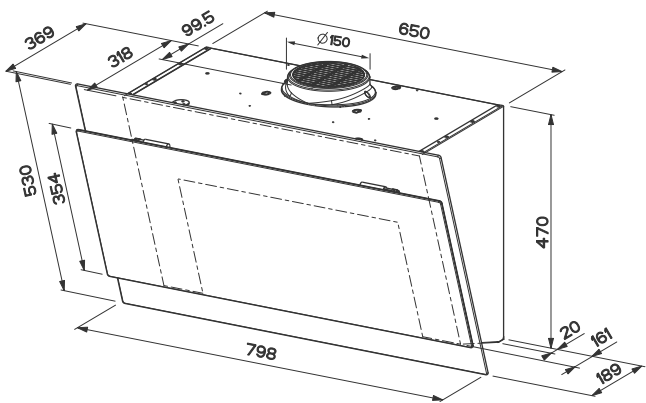

To be installed at a minimum distance from the hob of 45 cm.

WALL

TRUE DOUBLE BLACK


TRUE DOUBLE BLACK F80 cod. 330.0697.028



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.240
• Black Gloss / Black Matt	Air capacity IEC point	270	350	450	790	F8 Charcoal filter
Controls	Pressure	450	520	560	600	Cod. 112.0158.127
Touch Control	Input	160	200	240	270	FHP8 Charcoal filter High Performance
Lighting	Noise level	46	50	56	68	Cod. 112.0185.278
LED						FLL8 Charcoal filter Long Lasting
Grease filter						Cod. 112.0696.899
Cassettes dishwasher safe with fall arrest system						Kit Chimney
Ø of air outlet						Cod. 112.0696.584
150 / 120 mm						Chimney Extension
Width						
800 mm						
Energy class						
A+						

TRUE BLACK




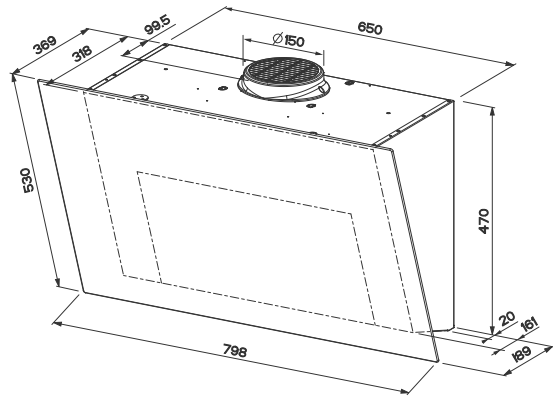

To be installed at a minimum distance from the hob of 45 cm.


TRUE BLACK

TRUE BLACK F80 cod. 330.0697.027



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Black Gloss	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Touch Control	Air capacity IEC point	270 360 460 790				Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting LED lights	Pressure	450 520 560 600				Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe with fall arrest system	Input	160 200 240 270				Cod. 112.0696.899 Kit Chimney
Ø of air outlet 150 / 120 mm	Noise level	53	55	59	69	Cod. 112.0696.584 Chimney Extension
Width 800 mm						
Energy class A						

Sometimes it's the details that really bring out a unique personality, as with our True Black. Embellished with a Matt black element that highlights the controls in the front panel and the Faber logo, it's a hood with standout visual appeal and functionality. The body angle lends it enhanced cooking fume extraction, simpler cleaning and maintenance and more light for the hob. The functional side of tone-on-tone.

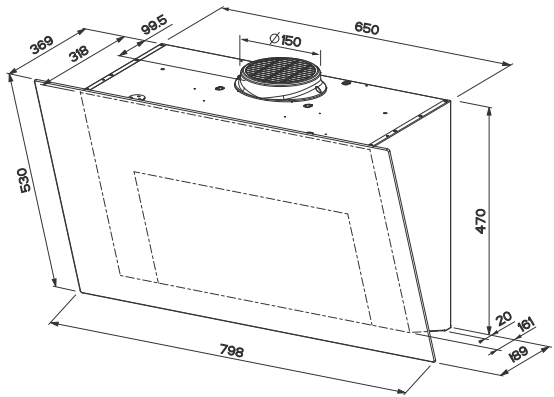

To be installed at a minimum distance from the hob of 45 cm.

PURE BLACK

PURE BLACK F80 cod. 330.0697.024



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Black Gloss	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Ghost Touch	Air capacity IEC point	270 360 460 790				Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting LED lights	Pressure	450 520 560 600				Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe with fall arrest system	Input	160 200 240 270				Cod. 112.0696.899 Kit Chimney
Ø of air outlet 150 / 120 mm	Noise level	53	55	59	69	Cod. 112.0696.584 Chimney Extension
Width 800 mm						
Energy class A						

The true essence of black. Enjoy the fullness of minimalism thanks to the hidden touch controls on the glass and a glossy, extremely elegant and seamless surface. But Pure Black isn't just exquisitely refined: the body angle allows enhanced cooking fume extraction, simpler cleaning and maintenance and more light. What's more, it tells you when the grease filter needs cleaning and the odour filter needs replacing through the filter maintenance light. Pure elegance.

SOFT EDGE




Nero Ingo



Bianco Kos
Chimney finish: white



Grigio Londra
Chimney finish: black

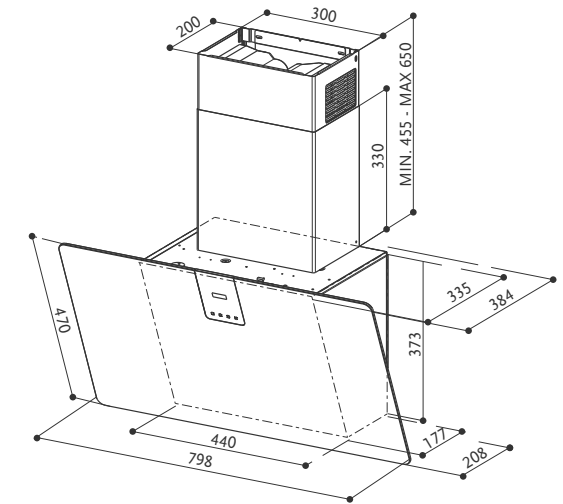

To be installed at a minimum distance from the hob of 50 cm.

WALL

SOFT EDGE

SOFT EDGE GRIGIO LONDRA A80 cod. 330.0597.527
SOFT EDGE BIANCO KOS A80 cod. 330.0597.528
SOFT EDGE NERO INGO A80 cod. 330.0597.526



FEATURES	PERFORMANCE					ACCESSORIES	
Finish	Speed	1	2	3	INT	Cod. 112.0157.240	
• FENIX NTM Grigio Londra • FENIX NTM Bianco Kos • FENIX NTM Nero Ingo	Air capacity IEC point	300 430 620 770					F8 Charcoal filter
Controls	Pressure	460 550 590 600					Cod. 112.0252.439
Touch control	Input	150 200 240 250					Recycling version kit WH
Lighting	Noise level	48	56	63	68	Cod. 112.0252.442	
LED						Recycling version kit BK	
Grease filter						Cod. 112.0158.127	
Cassettes dishwasher safe						FHP8 Charcoal filter High Performance	
Ø of air outlet						Cod. 112.0185.278	
150 / 120 mm						FLL8 Charcoal filter Long Lasting	
Width							
800 mm							
Energy class							
A+							

GLAM FIT ZERO DRIP PLUS



WALL

Black glass matt
Chimney finish: black




Sand glass matt
Chimney finish: white



Dusty blue glass matt
Chimney finish: white



ELEGANCE AND DESIGN
Simply touch the exclusive “Zero Drip” button to activate the heaters located on the glass and inside the hood and actively prevent the formation of droplets of condensation, even in long cooking sessions. The special matte surface and glossy details add an accent of elegant design in the best contemporary style.

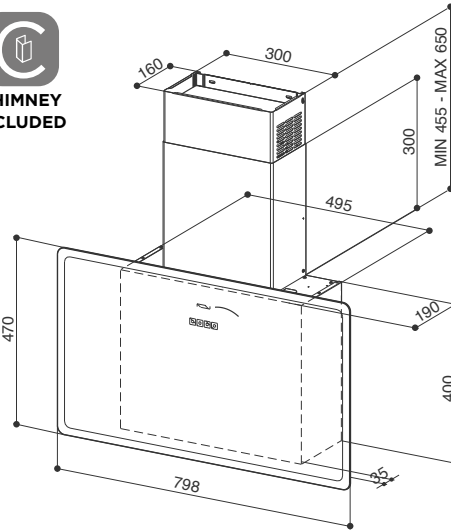

WALL

GLAM FIT ZERO DRIP PLUS

GLAM FIT ZERO DRIP PLUS SAND M A80 cod. 330.0615.736
GLAM FIT ZERO DRIP PLUS DB M A80 cod. 330.0615.737

GLAM FIT ZERO DRIP PLUS BK M KL A80 cod. 330.0615.738*



FEATURES		PERFORMANCE				ACCESSORIES
Finish		1	2	3	INT	Cod. 112.0540.783
• Sand glass matt • Dusty blue glass matt • Black glass matt						F22 Charcoal filter
Controls						
Touch control						
Lighting						
2 LED						
Grease filter						
Cassettes dishwasher safe						
Ø of air outlet						
150 / 120 mm						
Width						
800 mm						
Energy class						
A						

Black glass matt
Chimney finish: black





Sand glass matt
Chimney finish: white



Dusty blue glass matt
Chimney finish: white



ELEGANCE AND DESIGN
Simply touch the exclusive “Zero Drip” button to activate the heaters located on the glass and inside the hood and actively prevent the formation of droplets of condensation, even in long cooking sessions. The special matte surface and glossy details add an accent of elegant design in the best contemporary style.

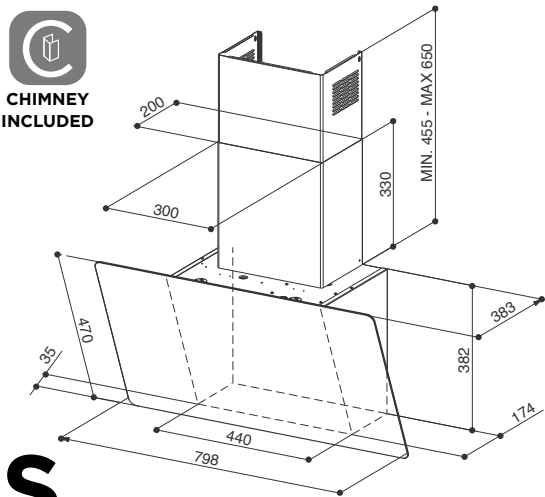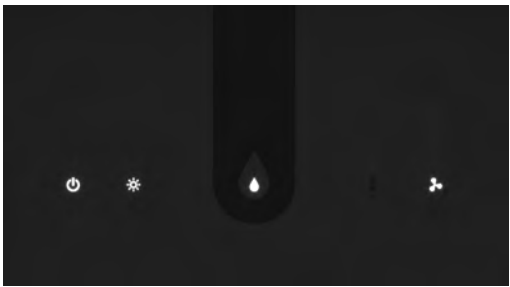

WALL

GLAM LIGHT ZERO DRIP PLUS

GLAM LIGHT ZERO DRIP PLUS S M A80 cod. 330.0615.681
GLAM LIGHT ZERO DRIP PLUS DB M A80 cod. 330.0615.734

GLAM LIGHT ZERO DRIP PLUS BK M KL A80 cod. 330.0615.735*



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.240
• Sand glass matt • Dusty blue glass matt • Black glass matt		Air capacity IEC point	290	420	600	740	F8 Charcoal filter
Controls		Pressure	450	540	560	580	Cod. 112.0158.127
Touch control		Input	150	200	240	250	FHP8 Charcoal filter High Performance
Lighting		Noise level	48	56	63	68	Cod. 112.0185.278
LED lights							FLL8 Charcoal filter Long Lasting
Grease filter							Cod. 112.0252.439
Cassettes dishwasher safe							Recycling version kit WH
Ø of air outlet							Cod. 112.0252.442
150 / 120 mm							Recycling version kit BK
Width							
800 mm							
Energy class							
A							

GLAM LIGHT ZERO DRIP



Sand glass
Chimney finish: white




Dusty blue glass
Chimney finish: white



Black glass
Chimney finish: black



Zero Drip technology guarantees an effective anti-drip action in daily use by using a special aluminium element to collect the condensation that may form on the surface of the hood during cooking sessions.

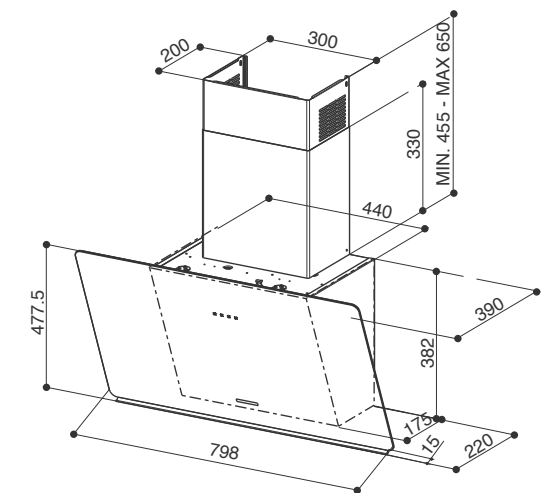

WALL

GLAM LIGHT ZERO DRIP

GLAM LIGHT ZERO DRIP SAND A80 cod. 330.0615.674
GLAM LIGHT ZERO DRIP DB A80 cod. 330.0615.675
GLAM LIGHT ZERO DRIP BK A80 cod. 330.0615.676



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.240
• Sand glass • Dusty blue glass • Black glass	Air capacity IEC point	320	490	640	750	F8 Charcoal filter
Controls	Pressure	390	490	640	750	Cod. 112.0252.439
Touch control	Input	130	165	210	250	Recycling version kit WH
Lighting	Noise level	49	58	64	67	Cod. 112.0252.442
LED lights						Recycling version kit BK
Grease filter						Cod. 112.0158.127
Cassettes dishwasher safe						FHP8 Cartuccia carbone attivo High Performance
Ø of air outlet						Cod. 112.0185.278
150 / 120 mm						FLL8 Charcoal filter Long Lasting
Width						
800 mm						
Energy class						
B						

Sand glass
Chimney finish: white




Black glass
Chimney finish: black



Dusty blue glass
Chimney finish: white



Zero Drip technology guarantees an effective anti-drip action in daily use by using a special aluminium element to collect the condensation that may form on the surface of the hood during some cooking phases.

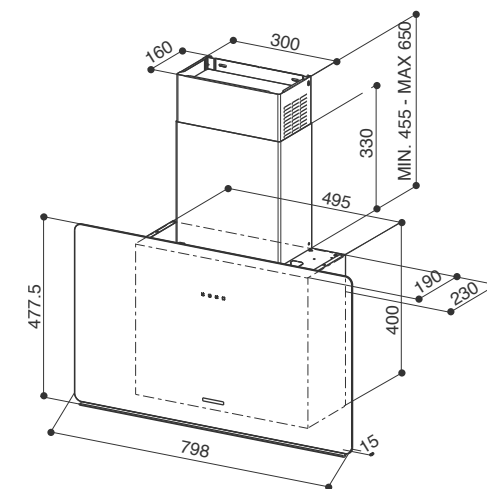

WALL

GLAM FIT ZERO DRIP

GLAM FIT ZERO DRIP SAND 80 cod. 330.0615.654

GLAM FIT ZERO DRIP DB 80 cod. 330.0615.655

GLAM FIT ZERO DRIP BK 80 cod. 330.0615.657



ZERO DRIP



NAUTILUS



INTENSIVE
SPEED




LED LIGHT



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0540.783
• Sand glass • Dusty blue glass • Black glass		Air capacity IEC point	190	250	400	570	F22 Charcoal filter
Controls		Pressure	300	450	540	650	
Touch control		Input	100	115	120	125	
Lighting		Noise level	52	58	67	73	
2 LED lights							
Grease filter							
Cassettes dishwasher safe							
Ø of air outlet							
150 / 120 mm							
Width							
800 mm							
Energy class							
A							



Cross titanium - CT

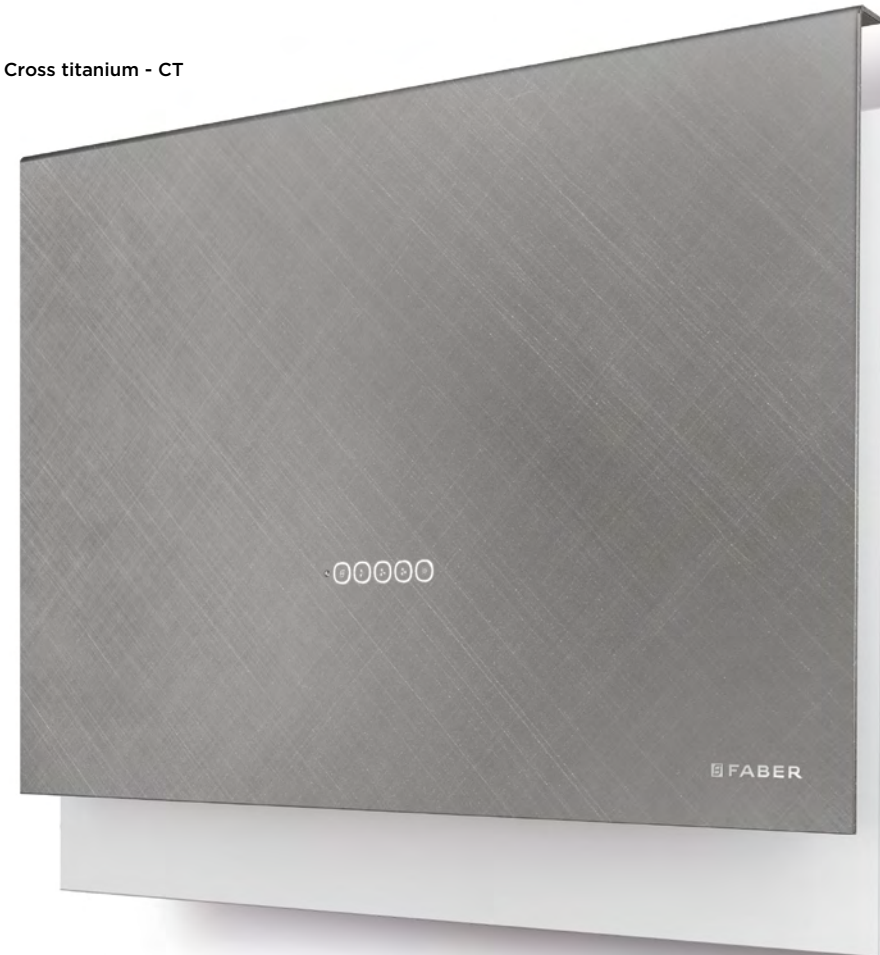

reddot award 2017
winner


Old copper - OC



IMPROVING PERFECT
IS POSSIBLE!

Faber's famous vertical hood is re-inventing its role as "window over the hob" by adopting the latest Nautilus technology. The new Nautilus blower not only improves performance but makes Talika an even more desirable addition to your kitchen by reducing noise. New comfort from a lightweight, and ultra slim hood now available in new finishes.


Chimney finish:
RAL Design 000 85 00

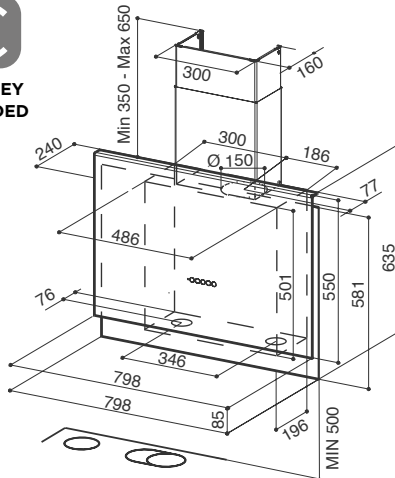

To be installed at a minimum
distance from the hob of 50 cm.

TALÌKA

TALÌKA OC A80 cod. 330.0540.784
TALÌKA CT A80 cod. 330.0540.785

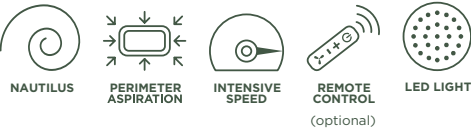


FEATURES	PERFORMANCE					ACCESSORIES
Finish • Old copper • Cross titanium	Speed	1	2	3	INT	Cod. 112.0540.783 F22 Charcoal filter
Controls Squarclé touch	Air capacity IEC point	200	300	410	560	Cod. 112.0676.782 Remote control
Lighting LED lights	Pressure	360	470	560	650	
Grease filter Cassettes dishwasher safe	Input	100	110	120	135	
Ø of air outlet 150 / 120 mm	Noise level	51	59	66	72	
Width 800 mm						
Energy class A						



CHIMNEY INCLUDED


White - chimney finish: stainless steel

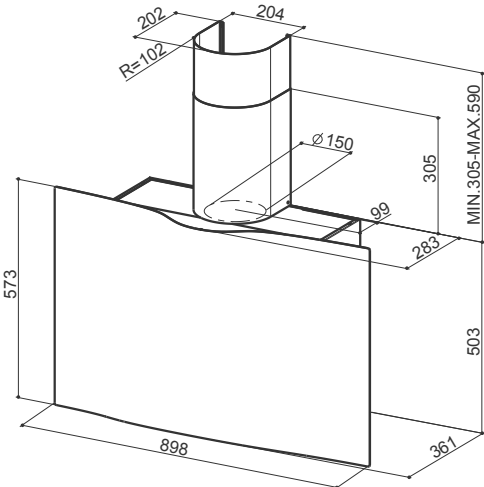

WALL

VEIL

VEIL WH A90 cod. 110.0324.953
VEIL BK A90 cod. 110.0324.954



Black matt - chimney finish: stainless steel




FEATURES	PERFORMANCE					ACCESSORIES
Finitura	1 2 3 INT					Cod. 112.0157.240
• White • Black matt	290 410 600 740					F8 Charcoal filter
Controls	450 510 550 560					Cod. 112.0327.007
Electronic	150 200 240 250					ENERGY Remote blower kit
Lighting	47 55 63 68					Cod. 112.0158.127
2 LED lights						FHP8 Charcoal filter High Performance
Grease filter						Cod. 112.0185.278
Cassettes dishwasher safe						FLL8 Charcoal filter Long Lasting
Ø of air outlet						
150 / 120 mm						
Width						
900 mm						
Energy class						
A+						





A VERTICAL HOOD WITH THE LATEST NAUTILUS TECHNOLOGY.
Glamour by name and nature, the Glam-Fit hood is defined by a minimal, contemporary style that shows elegance in every detail.
Its clean, essential lines, complemented by a glass surface and an elegant clear surround, add refinement to any kitchen and conceal Faber’s exclusive Nautilus technology.
The first ever completely flat, vertical glass hood, Glam-Fit also features an ultra-thin body of only 15 cm. Impressive performance and miserly consumption place it in energy efficiency class A. Glam-Fit comes in two finishes, black and white, both equally striking and typically Faber. Glam-Fit is also available in a “small” 55 cm version.

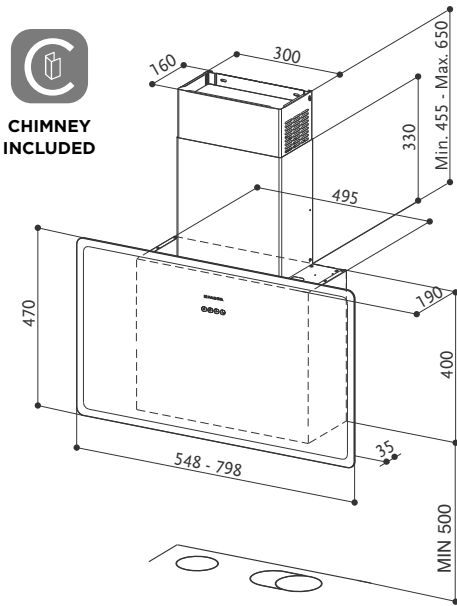

To be installed at a minimum distance from the hob of 50 cm.



GLAM-FIT

GLAM FIT 80 BK cod. 330.0528.269
GLAM FIT 55 BK cod. 330.0528.270
GLAM FIT 80 WH cod. 330.0528.302
GLAM FIT 55 WH cod. 330.0528.301




FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0540.783
• Black glass • White glass		Air capacity IEC point	190	250	400	570	
Controls		Pressure	300	450	540	650	F22 Charcoal filter
Touch control		Input	100	115	120	125	
Lighting		Noise level	52	58	67	73	
2 LED lights							
Grease filter							
Cassettes dishwasher safe							
Ø of air outlet							
150 / 120 mm							
Width							
550 / 800 mm							
Energy class							
A							



White/Transparent - WH/T
chimney finish: white



Dark grey/Light grey - DG/LG
chimney finish: black

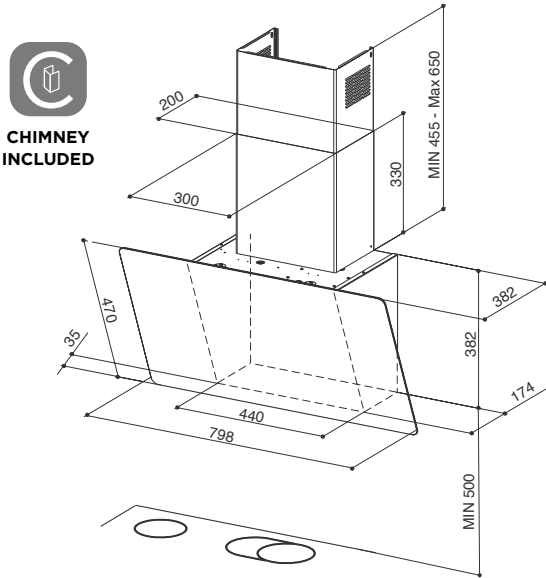

To be installed at a minimum distance from the hob of 50 cm.

GLAM-LIGHT

GLAM-LIGHT EV8+ DG/LG A80 cod. 110.0456.119
GLAM-LIGHT EV8+ WH/T A80 cod. 110.0456.143



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Dark grey glass / Light grey • White glass / Transparent	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Touch control	Air capacity IEC point	300	430	620	770	Cod. 112.0252.439 Recycling version kit WH
Lighting LED lights	Pressure	460	550	590	600	Cod. 112.0252.442 Recycling version kit BK
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Ø of air outlet 150 / 120 mm	Noise level	48	56	63	68	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Width 800 mm						
Energy class A+						




Dark grey stoneware



Light grey stoneware



CHIMNEY INCLUDED

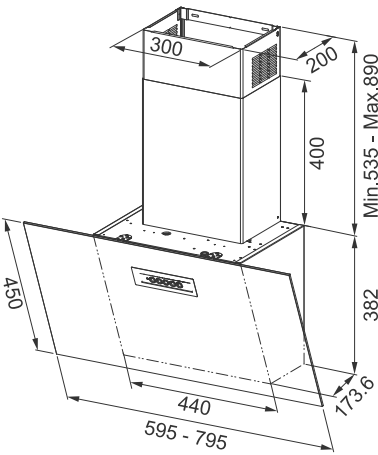


To be installed at a minimum distance from the hob of 50 cm.

WALL

GREXIA

GREXIA GRES DG A60 cod. 330.0694.725
GREXIA GRES DG A80 cod. 330.0694.726
GREXIA GRES LG A60 cod. 330.0694.727
GREXIA GRES LG A80 cod. 330.0694.728



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Dark grey stoneware • Light grey stoneware	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Touch control	Air capacity IEC point	300	460	610	710	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting 2 LED Lighting	Pressure	390	460	500	530	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe	Input	130	165	210	250	Cod. 112.0676.782 Remote control
Ø of air outlet 150 / 120 mm	Noise level	51	59	64	67	
Width 600 / 800 mm						
Energy class B						

TWEET





TWEET

TWEET EV8 LED BK A80 cod. 330.0529.666
TWEET EV8 LED WH A80 cod. 330.0529.667



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.240
• Black glass • White glass	Air capacity IEC point	300	460	610	710	F8 Charcoal filter
Controls	Pressure	390	460	500	530	Cod. 112.0158.127
Touch control	Input	130	165	210	250	FHP8 Charcoal filter High Performance
Lighting	Noise level	51	59	64	67	Cod. 112.0252.439
2 LED lights						Recycling version kit WH
Grease filter						Cod. 112.0252.442
Cassettes dishwasher safe						Recycling version kit BK
Ø of air outlet						Cod. 112.0185.278
150 / 120 mm						FLL8 Charcoal filter Long Lasting
Width						
800 mm						
Energy class						
B						


White glass



DAISY PLUS

DAISY + BK A55 cod. 330.0612.373
DAISY + BK A80 cod. 330.0612.374

DAISY + WH A55 cod. 330.0612.375
DAISY + WH A80 cod. 330.0612.371



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0327.007
• Black glass • White glass	Air capacity IEC point	300	430	620	770	ENERGY Remote blower kit
Controls	Pressure	460	550	590	600	Cod. 112.0157.240
Touch control	Input	150	200	240	250	F8 Charcoal filter
Lighting	Noise level	48	56	63	68	Cod. 112.0327.632
2 LED lights						Recycling version kit X
Grease filter						Cod. 112.0158.127
Cassettes dishwasher safe						FHP8 Charcoal filter High Performance
Ø of air outlet						Cod. 112.0185.278
150 / 120 mm						FLL8 Charcoal filter Long Lasting
Width						
550 / 800 mm						
Energy class						
A+						

White glass








ECO FUNCTION:
change of air with minimum
consumption and maximum
silence.


Onyx-T is the quietest of all T-Shape hoods and guaranteed to surprise which allows an ultra silent mode. The hood's stylish design conceals FABER's exclusive SIL & STILL technology which allows functioning in ultra-silent mode at a sound level of less than 40 dB(A). Maximum comfort, minimum energy consumption and complete freedom to enjoy your home thanks to a special function that continuously exchanges air.

ONYX-T

SIL & STILL BRUSHLESS SOUND PRO BOOST INTENSIVE SPEED REMOTE CONTROL (optional) LED LIGHT

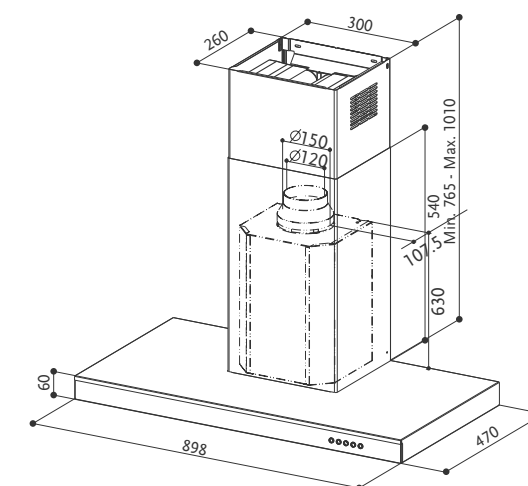WALL



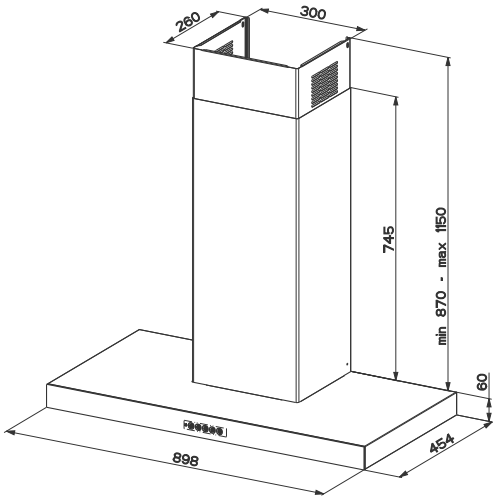

WALL

T-DARK

T-DARK A90 NG cod. 325.0652.937



SOUND PRO



REMOTE BLOWER
(optional)



INTENSIVE SPEED



FILTER ALARM




REMOTE CONTROL
(optional)



LED LIGHT



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.243
• Black stainless steel		Air capacity IEC point	270	350	450	780	F9 Charcoal filter
Controls		Pressure	460	510	560	590	Cod. 112.0676.782
Squarcle Touch		Input	165	200	240	270	Remote control
Lighting		Noise level	48	54	60	71	Cod. 112.0327.007
2 LED lights							ENERGY Remote blower kit
Grease filter							Cod. 112.0185.276
Cassettes dishwasher safe							FLL9 Charcoal filter Long Lasting
Ø of air outlet							Cod. 112.0626.902
150 / 120 mm							Kit recycling wall t-shape
Width							
800 mm							
Energy class							
A++							

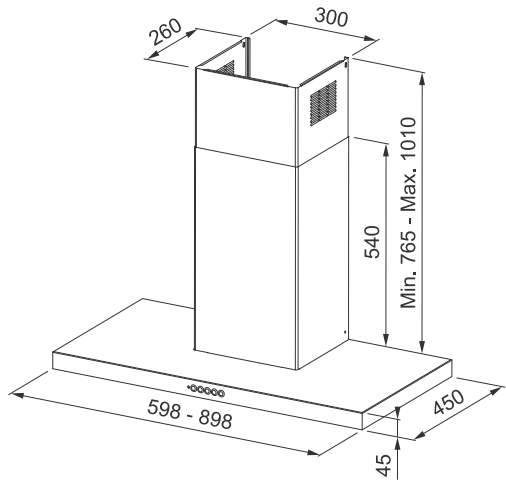

BELLA SILENCE


BELLA SILENCE X A60 cod. 325.0658.632
BELLA SILENCE X A90 cod. 325.0658.631



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Squarcle touch	Air capacity IEC point	285	365	470	750	Cod. 112.0676.782 Remote control
Lighting 2 LED lights	Pressure	450	490	510	560	Cod. 112.0157.252 Upper chimney kit X
Grease filter Cassettes dishwasher safe	Input	180	220	260	310	Cod. 112.0327.007 ENERGY Remote blower kit
Ø of air outlet 150 / 120 mm	Noise level	48	53	57	68	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Width 600 / 900 mm						Cod. 112.0626.902 Kit recycling wall T-Shape
Energy class A+						




White matt

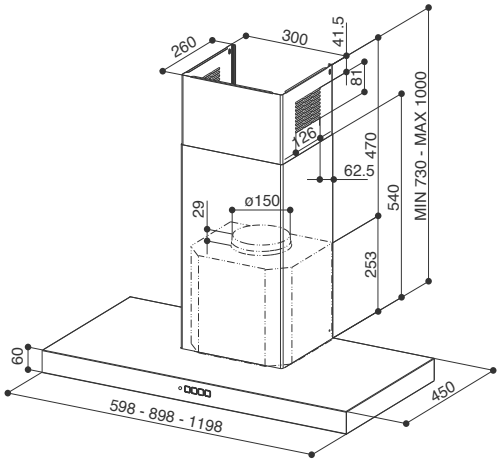

STILO COMFORT

STILO COMFORT X A60 cod. 325.0615.637
STILO COMFORT X A90 cod. 325.0615.636
STILO COMFORT X A120 cod. 325.0615.638
STILO COMFORT BK MATT A60 cod. 325.0618.791
STILO COMFORT BK MATT A90 cod. 325.0618.783

STILO COMFORT BK MATT A120 cod. 325.0618.787
STILO COMFORT WH MATT A60 cod. 325.0618.789
STILO COMFORT WH MATT A90 cod. 325.0618.740
STILO COMFORT WH MATT A120 cod. 325.0618.790



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel • Black matt • White matt	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic	Air capacity IEC point	290	460	610	710	Cod. 112.0157.252 Upper chimney kit X
Lighting 2 LED lights	Pressure	390	470	530	540	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	130	165	210	250	Cod. 112.0327.631 HFH Filter kit
Ø of air outlet 150 / 120 mm	Noise level	50	59	66	69	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Width 600 / 900 / 1200 mm						Cod. 112.0626.902 Kit recycling wall T-Shape
Energy class B						

Black matt




Stainless steel





STILO GLASS SMART

STILO GLASS SMART X/V A60 cod. 325.0617.017
STILO GLASS SMART X/V A90 cod. 325.0617.016

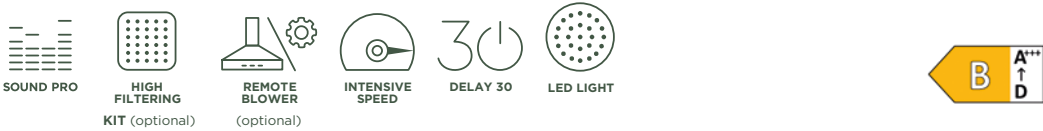

FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.243
• Stainless steel / black glass	Air capacity IEC point	290	460	610	710	F9 Charcoal filter
Controls	Pressure	390	470	530	540	Cod. 112.0157.252
Touch control	Input	130	165	210	250	Upper chimney kit X
Lighting	Noise level	50	59	66	69	Cod. 112.0327.631
2 LED lights						HFH Filter kit
Grease filter						Cod. 112.0185.276
Cassettes dishwasher safe						FLL9 Charcoal filter Long Lasting
Ø of air outlet						Cod. 112.0626.902
150 / 120 mm						Kit recycling wall T-Shape
Width						
600 / 900 mm						
Energy class						
B						



STILO SMART


STILO SMART X A60 cod. 325.0615.633
STILO SMART X A90 cod. 325.0615.635
STILO SMART X A120 cod. 325.0615.634



FEATURES	PERFORMANCE				ACCESSORIES
Finish •Stainless steel	Speed	1	2	3	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic	Air capacity IEC point	230	320	430	Cod. 112.0157.252 Upper chimney kit X
Lighting 2 LED lights	Pressure	220	240	250	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	85	95	115	Cod. 112.0327.631 HFH Filter kit
Ø of air outlet 150 / 120 mm	Noise level	53	60	67	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Width 600 / 900 / 1200 mm					Cod. 112.0626.902 Kit recycling wall T-Shape
Energy class C					



Stilo SX/SP

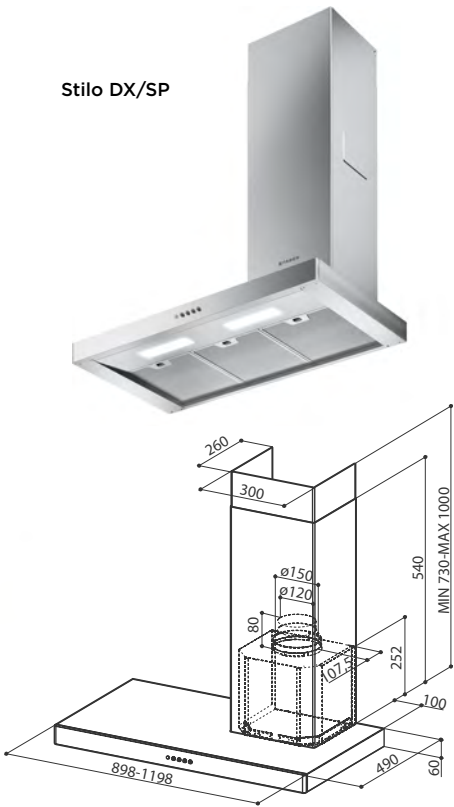

Stilo DX/SP

STILO DX-SX


STILO SRM SX/SP A90 cod. 325.0518.927
STILO SRM DX/SP A90 cod. 325.0518.928

STILO SRM SX/SP A120 cod. 325.0518.929
STILO SRM DX/SP A120 cod. 325.0518.930

- SOUND PRO
- HIGH FILTERING
KIT (optional)
- REMOTE BLOWER
(optional)
- LED LIGHT



FEATURES	PERFORMANCE			ACCESSORIES	
Finish • Stainless steel	Speed	1	2	3	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic	Air capacity IEC point	230	320	430	Cod. 112.0157.272 Splashback X 1200 mm
Lighting 2 LED lights	Pressure	220	240	250	Cod. 112.0157.252 Upper chimney kit X
Grease filter Cassettes dishwasher safe	Input	85	95	115	Cod. 112.0327.007 ENERGY Remote blower kit
Ø of air outlet 150 / 120 mm	Noise level	53	60	67	Cod. 112.0157.288 1 Baffl e filter kit X (order 3 kits for 900 mm version 4 kits for 1200 mm version)
Width 900 / 1200 mm					Cod. 112.0327.631 HFH Filter kit
Energy class C					Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
					Cod. 112.0157.271 Splashback X 900 mm
					Cod. 112.0626.902 Kit recycling wall T-Shape

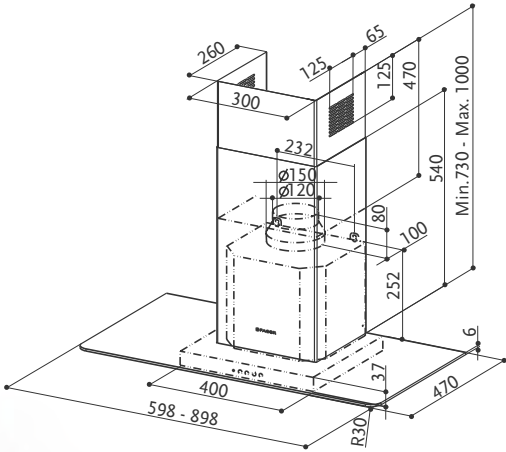

WALL

NICE

NICE LED SRM X/V NS A60 cod. 325.0617.052
NICE LED SRM X/V NS A90 cod. 325.0617.053


- SOUND PRO
- HIGH FILTERING
KIT (optional)
- REMOTE BLOWER
(optional)
- LED LIGHT



FEATURES	PERFORMANCE			ACCESSORIES	
Finish • Stainless steel / Glass	Speed	1	2	3	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic	Air capacity IEC point	230	310	420	Cod. 112.0157.252 Upper chimney kit X
Lighting 2 LED lights	Pressure	220	240	250	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	85	95	115	Cod. 112.0327.631 HFH Filter kit
Ø of air outlet 150 / 120 mm	Noise level	53	61	67	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Width 600 / 900 mm					Cod. 112.0626.902 Kit recycling wall T-Shape
Energy class C					




The control interface, now even more user-friendly and functional, is an iconic signature of the unmistakable Faber style.

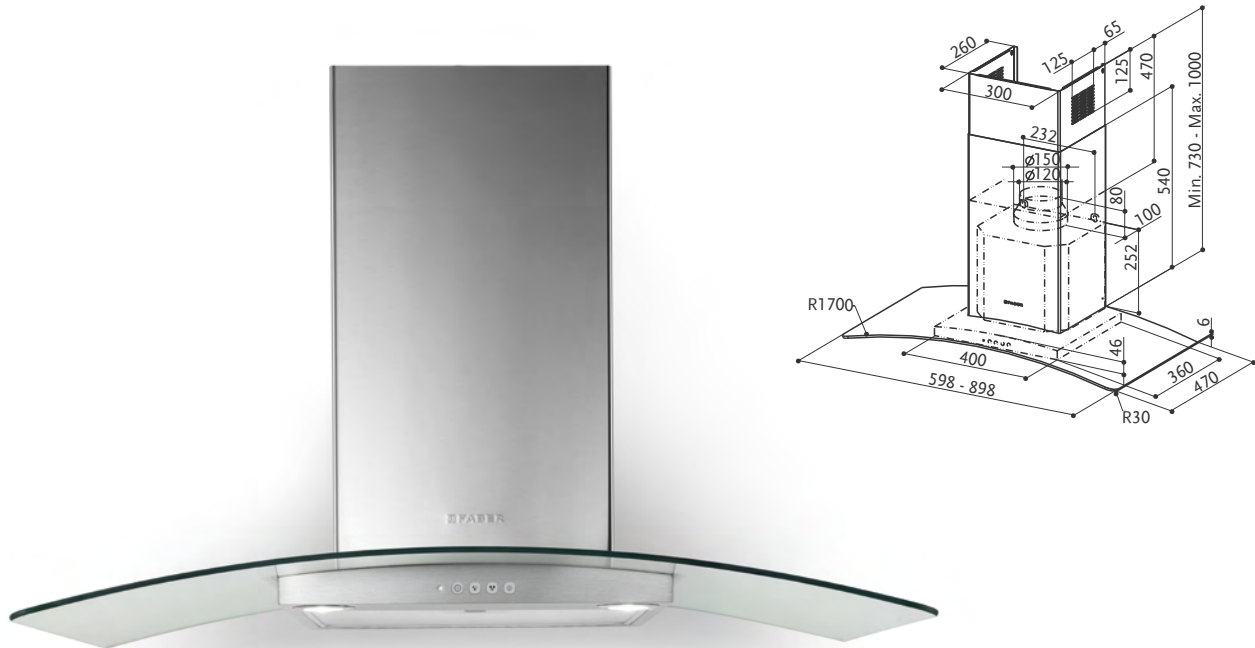

RAY


RAY SRM LED X/V NS A60 cod. 325.0617.020
RAY SRM LED X/V NS A90 cod. 325.0617.051



FEATURES	PERFORMANCE				ACCESSORIES
Finish •Stainless steel / Glass	Speed	1	2	3	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic	Air capacity IEC point	230	310	420	Cod. 112.0157.252 Upper chimney kit X
Lighting 2 LED lights	Pressure	220	240	250	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	85	95	115	Cod. 112.0327.631 HFH Filter kit
Ø of air outlet 150 / 120 mm	Noise level	53	61	67	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Width 600 / 900 mm					Cod. 112.0626.902 Kit recycling wall T-Shape
Energy class C					




The control interface, now even more user-friendly and functional, is an iconic signature of the unmistakable Faber style.

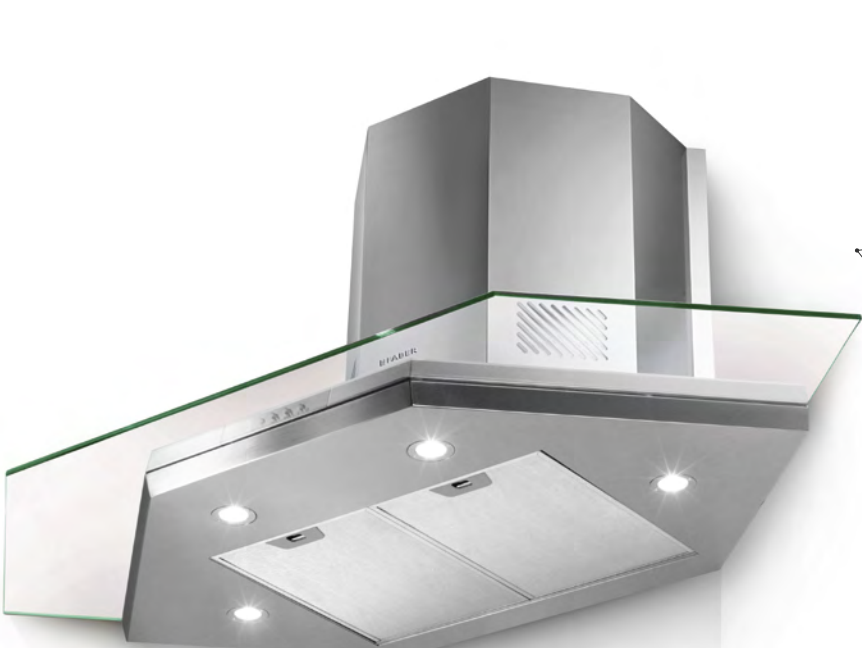


PREMIO CORNER/SP

PREMIO CORNER/SP EV8 LED X/V A90 cod. 325.0537.824
PREMIO CORNER/SP EV8 LED X/V A100 cod. 325.0537.825



FEATURES	PERFORMANCE					ACCESSORIES
Finish •Stainless steel / Glass	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic	Air capacity IEC point	290	460	610	710	Cod. 112.0157.263 Upper chimney kit X
Lighting 4 LED	Pressure	390	470	530	540	Cod. 112.0157.273 Splashback X
Grease filter Cassettes dishwasher safe	Input	130	165	210	250	Cod. 112.0157.284 Corner adapter kit
Ø of air outlet 150 / 120 mm	Noise level	50	59	66	69	Cod. 112.0327.007 ENERGY Remote blower kit
Width 900x900 / 1000x1000 mm						Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Energy class B						


WALL

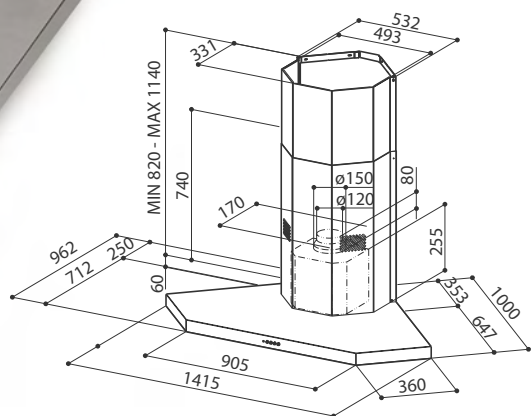

STILO CORNER/SP LED EV8 X A100 cod. 325.0538.982




FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.243
• Stainless steel	Air capacity IEC point	290	460	610	710	F9 Charcoal filter
Controls	Pressure	390	470	530	540	Cod. 112.0157.263
Electronic	Input	130	165	210	250	Upper chimney kit X
Lighting	Noise level	50	59	66	69	Cod. 112.0157.274
4 LED						Splashback X
Grease filter						Cod. 112.0157.284
Cassettes dishwasher safe						Corner adapter kit
Ø of air outlet						Cod. 112.0327.007
150 / 120 mm						ENERGY Remote blower kit
Width						Cod. 112.0185.276
1000x1000 mm						FLL9 Charcoal filter Long Lasting
Energy class						
B						

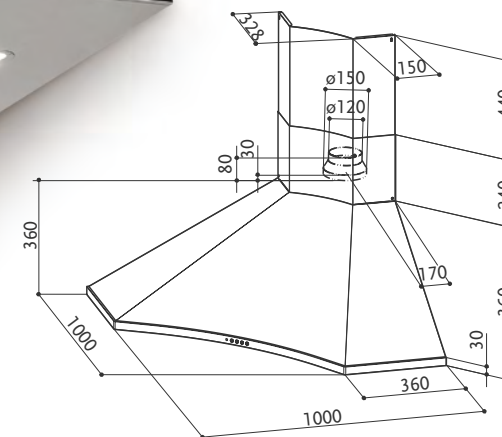

SOLARIS EG6 LED X A100 cod. 320.0538.968



FEATURES	PERFORMANCE	ACCESSORIES
Finish • Stainless steel	Speed 1 2 3	Cod. 112.0157.240
Controls Electromechanical	Air capacity IEC point 260 390 600	F8 Charcoal filter
Lighting 4 LED	Pressure 230 370 500	Cod. 112.0157.261
Grease filter Cassettes dishwasher safe	Input 80 105 160	Upper chimney kit X
Ø of air outlet 150 / 120 mm	Noise level 45 54 63	Cod. 112.0157.274
Width 1000x1000 mm		Splashback X
Energy class C		Cod. 112.0327.007
		ENERGY Remote blower kit
		Cod. 112.0158.127
		FHP8 Charcoal filter High Performance
		Cod. 112.0185.278
		FLL8 Charcoal filter Long Lasting

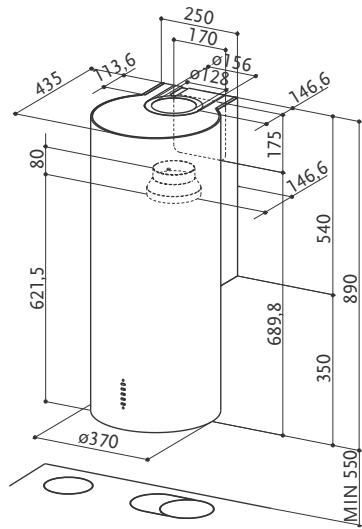


To be installed at a minimum distance from the hob of 55 cm.

CYLINDRA GLOSS PLUS

CYLINDRA GLOSS PLUS EV8+ WH A37 cod. 335.0492.565



FEATURES	PERFORMANCE					ACCESSORIES
Finish • White gloss	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic Led	Air capacity IEC point	280 400 570 700				Cod. 112.0676.782 Remote control
Lighting Micro LED Lights	Pressure	450 540 580 590				Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm	Noise level	48	56	65	69	
Width 370 mm						
Energy class A						

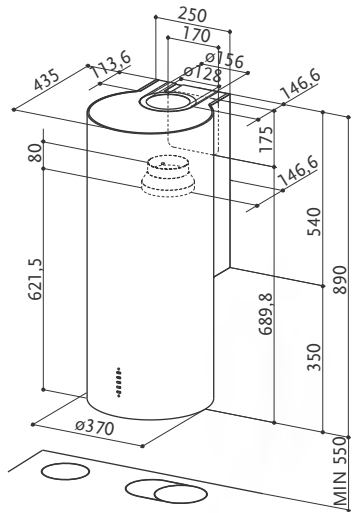

To be installed at a minimum distance from the hob of 55 cm.

CYLINDRA

CYLINDRA EV8 X A37 cod. 110.0332.307



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic Led	Air capacity IEC point	290 440 570 660				Cod. 112.0676.782 Remote control
Lighting 2 LED lights	Pressure	390 460 500 530				Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	130	165	210	250	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm	Noise level	46	58	65	68	
Width 370 mm						
Energy class B						




ECLIPSE

ECLIPSE EV8 LED X A37 cod. 335.0538.983



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.243
• Stainless steel	Air capacity IEC point	290	430	540	620	F9 Charcoal filter
Controls	Pressure	320	440	500	520	Cod. 112.0327.007
Electronic	Input	130	165	210	250	ENERGY Remote blower kit
Lighting	Noise level	52	61	66	69	Cod. 112.0185.276
2 LED lights						FLL9 Charcoal filter Long Lasting
Grease filter						
Cassettes dishwasher safe						
Ø of air outlet						
150 / 120 mm						
Width						
370 mm						
Energy class						
B						

White matt

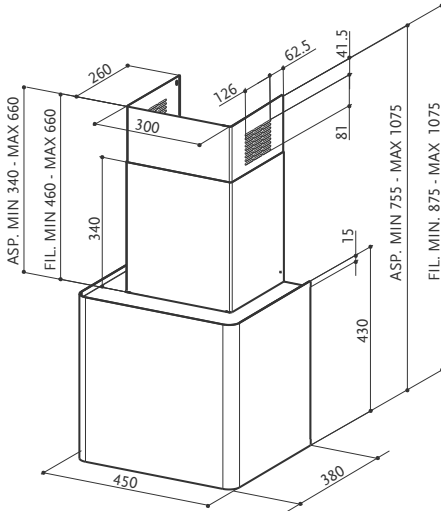

LITHOS

LITHOS EG6 LED BK A45 cod. 335.0533.563

LITHOS EG6 LED WH MATT A45 cod. 335.0533.564

LITHOS EG6 LED WH A45 cod. 335.0533.565



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.240
• Black matt • White matt • White milk	Air capacity IEC point	250	380	510	580	F8 Charcoal filter
Controls	Pressure	230	370	460	500	Cod. 112.0158.127
Electronic	Input	80	105	140	160	FHP8 Charcoal filter High Performance
Lighting	Noise level	44	52	59	61	Cod. 112.0185.278
2 LED						FLL8 Charcoal filter Long Lasting
Grease filter						
Cassettes dishwasher safe						
Ø of air outlet						
150 / 120 mm						
Width						
450 mm						
Energy class						
C						

White milk



Black



CHLOÈ





WALL



Old brass - OB



Rear air outlet kit (optional)

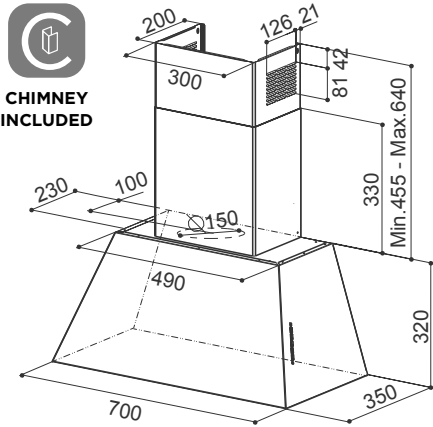

WALL

further specication in the accessory session on page 355

Old copper - OC



Cast iron - CI



Dark grey matt - DG MATT



Old metal - OM



Country grey matt - CG MATT



CHLOÈ

CHLOÈ EV8+ OM A70 cod. 110.0456.129
CHLOÈ EV8+ OC A70 cod. 110.0456.174
CHLOÈ EV8+ CI A70 cod. 110.0456.175

CHLOÈ EV8+ OB A70 cod. 110.0456.177
CHLOÈ EV8+ DG MATT A70 cod. 110.0458.989
CHLOÈ EV8+ CG MATT A70 cod. 110.0459.033

SOUND PRO

REMOTE BLOWER
(optional)

REAR OUTLET

PERIMETER ASPIRATION

INTENSIVE SPEED

DELAY 30

HOUR 24

FILTER ALARM

REMOTE CONTROL
(optional)

LED LIGHT

FEATURES		PERFORMANCE		ACCESSORIES	
Finish • Old metal • Old copper • Cast iron • Old brass • Dark grey matt • Country grey matt		Speed	1 2 3 INT	Cod. 112.0157.240	Cod. 112.0490.250
		Air capacity IEC point	270 410 590 730	F8 Charcoal filter	Rear air outlet kit OC
		Pressure	460 550 590 600	Cod. 112.0676.782	Cod. 112.0490.261
		Input	150 200 240 250	Remote control	Rear air outlet kit CI
		Noise level	49 56 64 68	Cod. 112.0327.007	Cod. 112.0490.262
Controls Electronic Led				ENERGY Remote blower kit	Rear air outlet kit OB
Lighting LED light				Cod. 112.0158.127	Cod. 112.0490.263
Grease filter Cassettes dishwasher safe				FHP8 Charcoal filter High Performance	Rear air outlet kit DG MATT
Ø of air outlet 150 /120 mm				Cod. 112.0185.278	Cod. 112.0490.264
Width 700 mm				FLL8 Charcoal filter Long Lasting	Rear air outlet kit CG MATT
Energy class A				Cod. 112.0490.249	
				Rear air outlet kit OM	




Cast iron - CI

Country grey matt - CG MATT




THE GREATNESS OF UNCONVENTIONAL DESIGN.
What would you rather do? Bask in the inspiring warmth of tradition, or experience thrilling new emotions every day? With Chloè XL you can do both. This hood combines exciting design with traditional character and takes high-tech performance and timeless elegance to a whole new level.

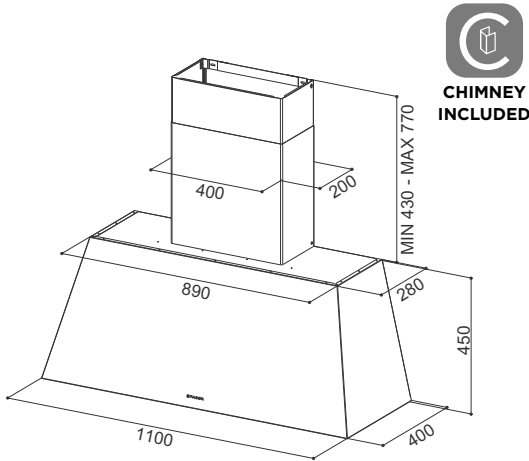

WALL


CHLOÈ XL

CHLOÈ XL CG MATT A110 cod. 321.0506.535
CHLOÈ XL CI A110 cod. 321.0506.536




FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.240
• Country grey matt • Cast iron		Air capacity IEC point	260	390	510	600	F8 Charcoal filter
Controls		Pressure	230	370	470	500	Cod. 112.0158.127
Electromechanical Knob		Input	80	105	140	160	FHP8 Charcoal filter High Performance
Lighting		Noise level	52	54	58	62	Cod. 112.0185.278
LED light							FLL8 Charcoal filter Long Lasting
Grease filter							Cod. 112.0327.007
Cassettes dishwasher safe							ENERGY Remote blower kit
Ø of air outlet							
150 /120 mm							
Width							
1100 mm							
Energy class							
C							



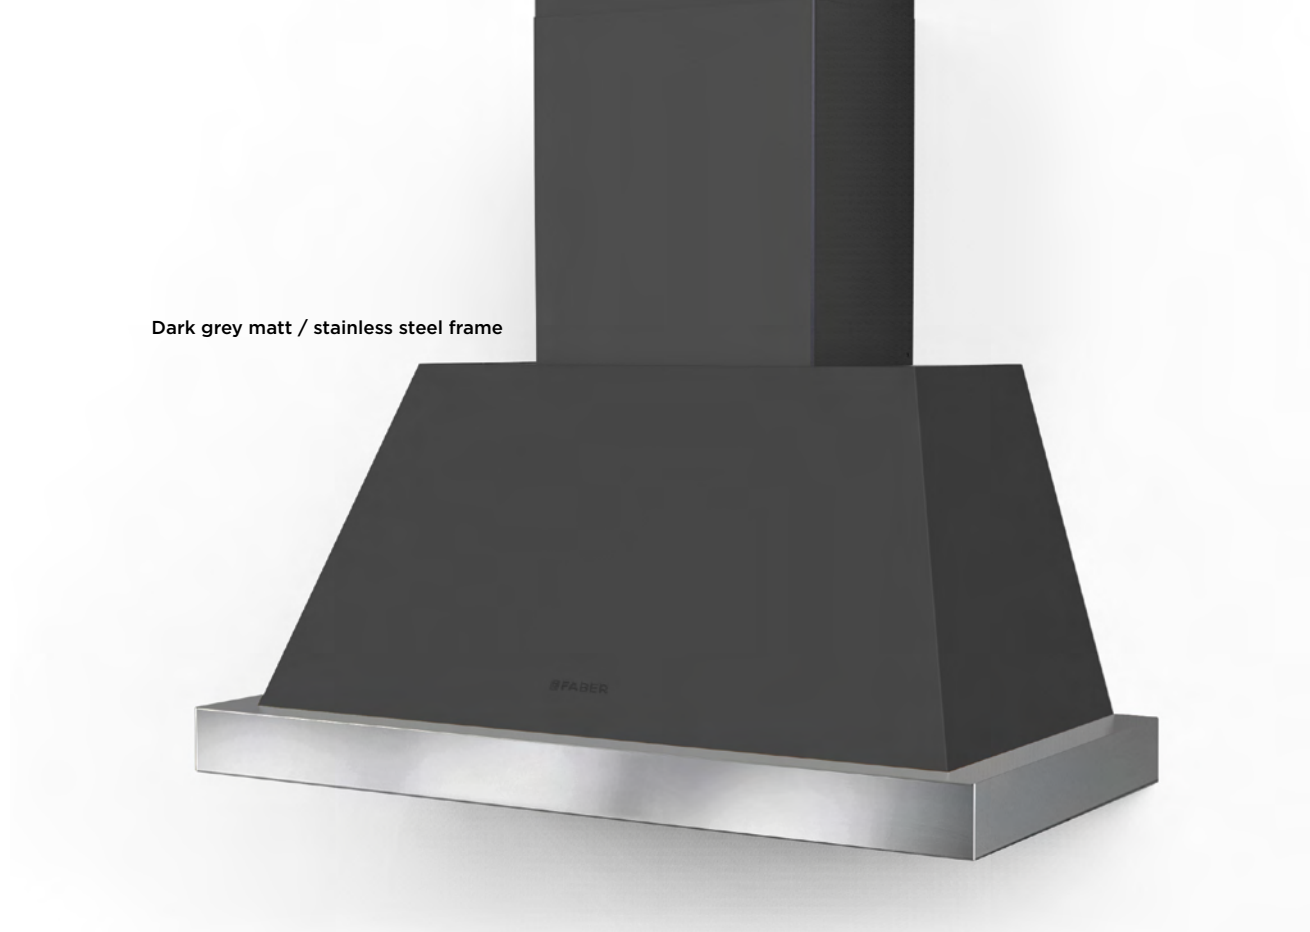

Dark grey matt / stainless steel frame

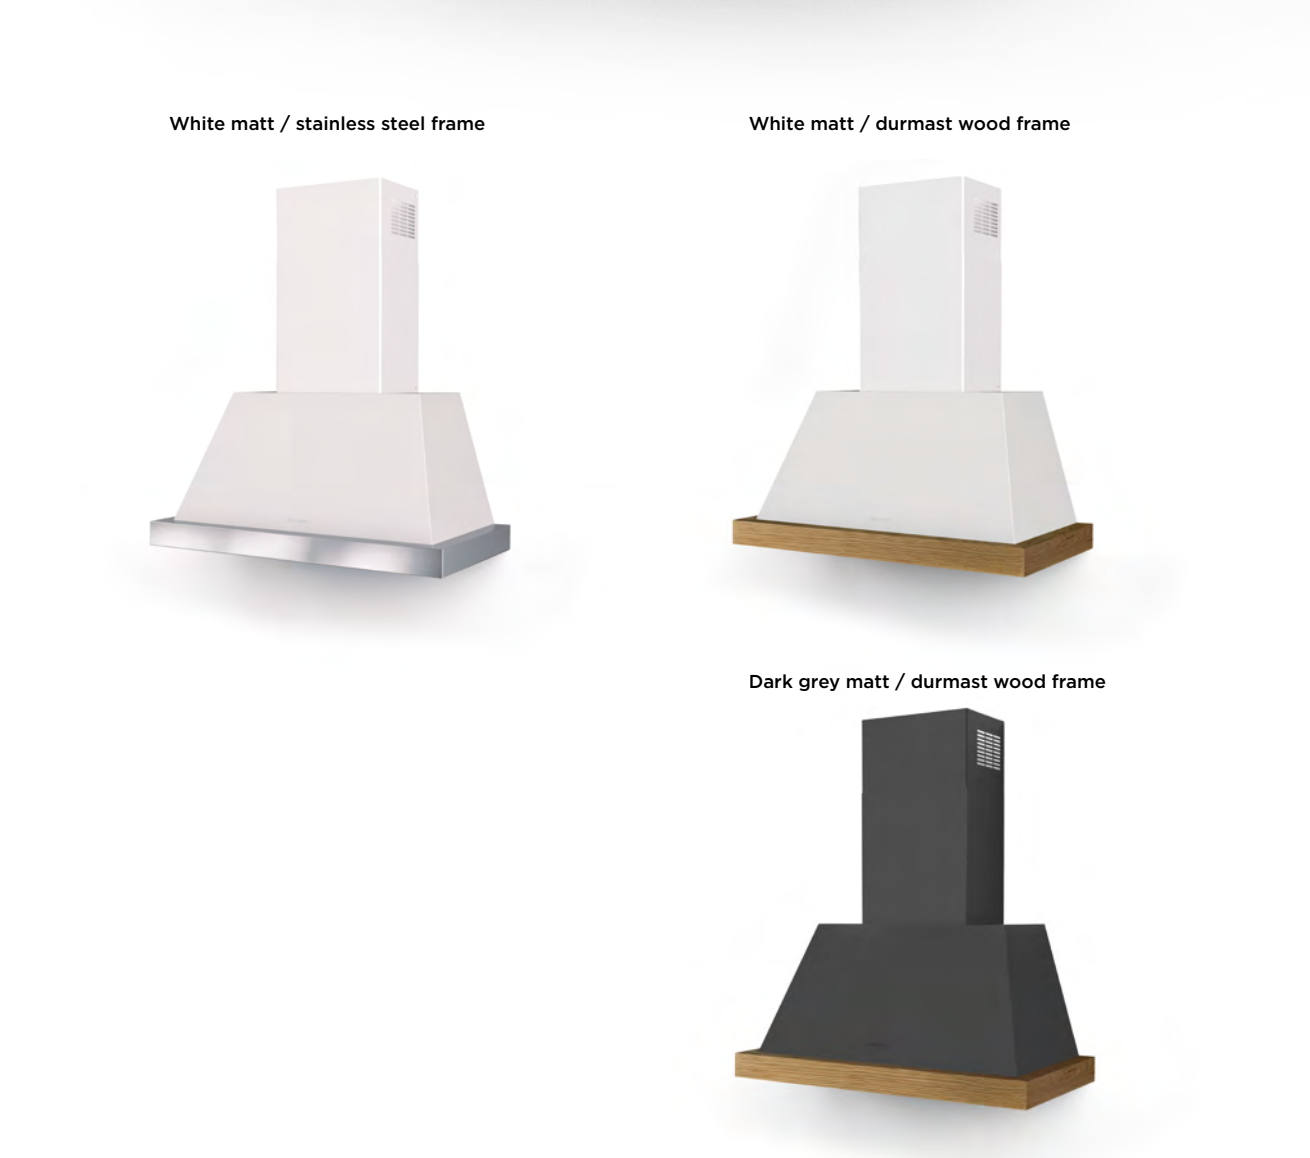


White matt / stainless steel frame

White matt / durmast wood frame

Dark grey matt / durmast wood frame


**STYLE IN EVERY DETAIL,
TECHNOLOGY IN EVERY
BREATH.**
Today, the world is one nation,
the whole planet a global village.
And the pleasure of country
living has reached even the
biggest metropolis. Today is
the era of Thea. This is a hood
that looks beyond the walls of
your kitchen, opening up new
horizons in design and redefining
life in the home. But take
nothing for granted! Despite its
vintage soul, this hood packs the
performance needed for today's
industrial world.

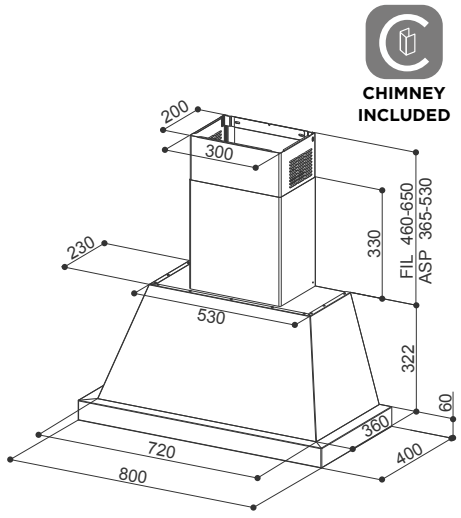

**CHIMNEY
INCLUDED**

THEA

THEA EV8 WH MATT A80 SC cod. 321.0517.783
THEA EV8 DG MATT A80 SC cod. 321.0517.784



B

A+++
↑
D

THE THEA HOOD MUST BE MATCHED WITH ONE OF THE AVAILABLE FRAMES

FEATURES		PERFORMANCE					ACCESSORIES	FRAME FINISH
Finish		Speed	1	2	3	INT	Cod. 112.0157.240	Cod. 112.0516.433
• White matt • Dark grey matt		Air capacity IEC point	310	470	620	740	F8 Charcoal filter	Kit stainless steel frame Thea wall 800mm
Controls		Pressure	390	460	500	530	Cod. 112.0327.007	
Electronic		Input	130	165	210	250	ENERGY Remote blower kit	
Lighting		Noise level	49	58	64	67	Cod. 112.0158.127	Cod. 112.0516.434
LED light							FHP8 Charcoal filter High Performance	Kit durmast frame Thea wall 800mm
Grease filter							Cod. 112.0185.278	
Cassettes dishwasher safe							FLL8 Charcoal filter Long Lasting	
Ø of air outlet							Cod. 112.0527.474	
150 /120 mm							Durmast shelf kit	
Width								
800 mm								
Energy class								
B								



FOOD SET

FOOD SET cod. 112.0524.622

This professional food set boasts impressive and exclusive characteristics, including a base made from Krion, produced with the **Krion Eco-Active Solid Technology™**.

This new technology present in Krion™ Eco-Active resides in incorporating a series of activators into the product, specially developed by Krion, which when in contact with any type of light, provide Krion™ Eco-Active with the following new properties: Air purification, Anti-bacteria, Selfcleaning and Elimination of chemical products.

A large number of compounds that are dangerous to our health have been eliminated, such as pesticides present in our surroundings, and especially in the foods we consume.

The base is specially shaped to contain the set's washable food bag and solid wood cutting board. In this set, three practical accessories combine to form a unique solution.

The Thea food set is ideal for the elegant presentation of bread, charcuterie, cheese and fruit, and for use as a simple but chic platter to serve guests at important occasions with rustic aperitifs and finger foods.

FEATURES

Material: Krion base
Finish: White
Non-porous surface
Anti-bacterial properties
Made from fully recyclable, ecological material
Tough and long-lasting
Dimensions: 440x200x10 mm

MAINTENANCE

Dishwasher washable.
 Self-cleaning: liquids and dirt can be cleaned from the surface of the material with greater ease, reducing the use of detergents.
 To remove stubborn dirt and surface scratches, clean with a dry, slightly abrasive kitchen sponge.

Material: Solid wood insert
Finish: Durmast

ORDINARY MAINTENANCE: Wite with a damp sponge and dry with a cloth.

SPECIAL MAINTENANCE: To nourish the wood and keep the colour bright, pass a cloth dipped in a few drops of cooking oil.



KIT MENSOLA

SHELF KIT

KIT SHELF cod. 112.0527.474

This wood shelf kit is a great way to add value to your kitchen. Simple and compatible with all styles, this accessory blends great functionality and attractive design.

FEATURES

Material: Wood
Finish: Durmast
Shelf bracket: Internal
Dimensions: 600x400x30 mm

ORDINARY MAINTENANCE: For normal cleaning, simply dust the top with a soft cloth.

SPECIAL MAINTENANCE: Every 2 or 3 months the wooden surface must be polished using a commercially available beeswax product in a colour specific to the type of wood.

NEVER use aggressive detergents or water, as these may damage the surface varnish over time.




We recommend combining it with Thea and Thea Island hoods that have frame in the same durmast wood finish.






TENDER

TENDER X A60 cod. 110.0157.048
TENDER X A90 cod. 110.0157.049



FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0157.240 Cod. 112.0157.272
• Stainless steel	Air capacity IEC point	255 320 400			F8 Charcoal filter Splashback X 1200 mm
Controls	Pressure	175	210	235	Cod. 112.0157.262 Cod. 112.0327.007
Electromechanical	Input	70	100	125	Upper chimney kit X ENERGY Remote blower kit
Lighting	Noise level	55	62	68	Cod. 112.0157.270 Cod. 112.0158.127
2 LED					Splashback X 600 mm FHP8 Charcoal filter High Performance
Grease filter					Cod. 112.0157.271 Cod. 112.0185.278
Cassettes dishwasher safe					Splashback X 900 mm FLL8 Charcoal filter Long Lasting
Ø of air outlet					
150 / 120 mm					
Width					
600 / 900 mm					
Energy class					
D					

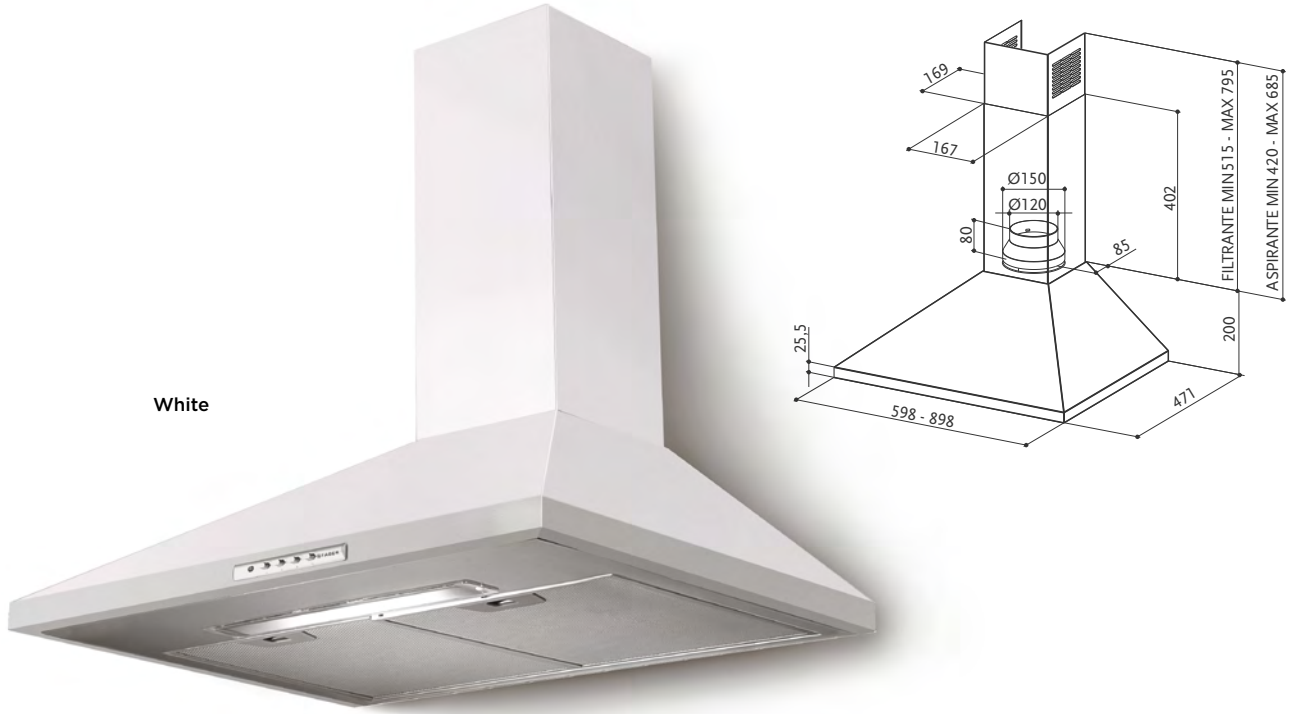

VALUE

VALUE PB X A60 cod. 320.0557.539
VALUE PB X A90 cod. 320.0557.540
VALUE PB W A60 cod. 320.0557.541




FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0067.944
• Stainless steel • White • Black	Air capacity IEC point	200 270 380			F3 Charcoal filter
Controls	Pressure	260 290 300			Cod. 112.0544.470
Electromechanical push button	Input	95	125	145	FLL3 Charcoal filter Long Lasting
Lighting	Noise level	52	58	64	
2 LED lights					
Grease filter					
Cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
600 / 900 mm					
Energy class					
D					



Stainless steel



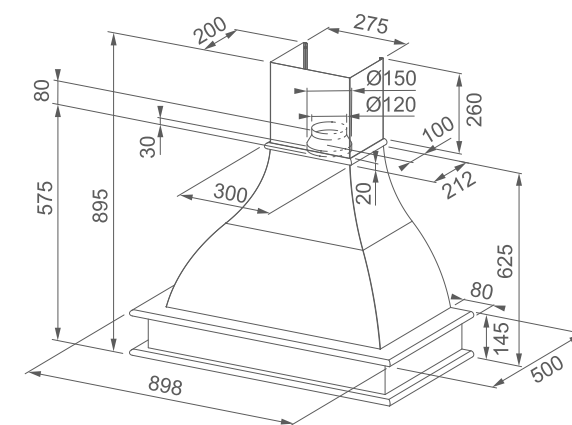

WEST

WEST 90 NF cod. 321.0693.744



LED LIGHT




THE WEST HOOD MUST BE MATCHED WITH ONE OF THE AVAILABLE FRAMES


FEATURES	PERFORMANCE			ACCESSORIES	FRAME FINISH	
Finish • White RAL 9010	Speed	1	2	3	Cod. 112.0067.944	Cod. 112.0693.760
Controls Electromechanical	Air capacity IEC point	240	330	450	F3 Charcoal filter	KIT FRAME ASH 90 C3 Frame finish ASH
Lighting 2 LED lights	Pressure	220	250	250	Cod. 112.0544.470	Cod. 112.0693.762
Grease filter Cassettes dishwasher safe	Input	85	95	115	FLL3 Charcoal filter Long Lasting	KIT FRAME LIME 90 C2 Frame finish LIME
Ø of air outlet 150 / 120 mm	Noise level	53	61	67		Cod. 112.0693.764
Width 900 mm						KIT FRAME LIME 90 C3 Frame finish LIME
Energy class C						 Frame design C3
						 Frame design C2



Frame design C3
ASH finish
FRAME NOT INCLUDED

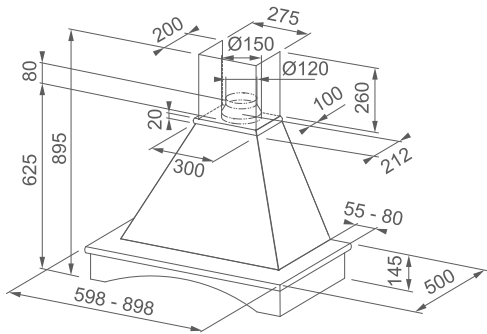

Frame design C2
ASH finish
FRAME NOT INCLUDED

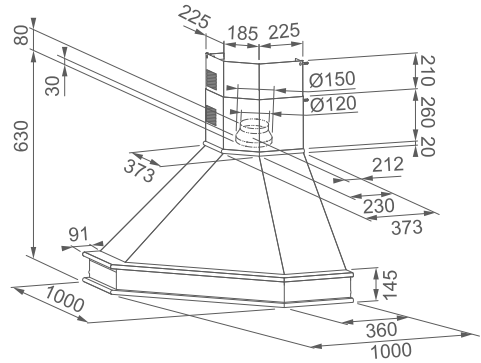

RANCH

RANCH 60 NF cod. 321.0693.748
RANCH 90 NF cod. 321.0693.747



LED LIGHT



THE RANCH CORNER HOOD MUST BE MATCHED WITH ONE OF THE AVAILABLE FRAMES

FEATURES	PERFORMANCES			ACCESSORIES	FINITURA CORNICI
Finish • White RAL 9010	Speed	1	2	3	Cod. 112.0067.944 F3 Charcoal filter
Controls Electromechanical Slider	Air capacity IEC point	240	330	450	Cod. 112.0544.470 FLL3 Charcoal filter Long Lasting
Lighting 2 LED lights	Pressure	220	250	250	Cod. 112.0693.760 KIT FRAME ASH 90 C3 Frame finish ASH
Grease filter Cassettes dishwasher safe	Input	85	95	115	Cod. 112.0693.761 KIT FRAME LIME 60 C2 Frame finish LIME
Ø of air outlet 150 / 120 mm	Noise level	53	61	67	Cod. 112.0693.762 KIT FRAME LIME 90 C2 Frame finish LIME
Width 600 / 900 mm					Cod. 112.0693.763 KIT FRAME LIME 60 C3 Frame finish LIME
Energy class C					Cod. 112.0693.764 KIT FRAME LIME 90 C3 Frame finish LIME



Frame design C3



Frame design C2

RANCH CORNER

RANCH CORNER 90 NF cod. 321.0693.746



LED LIGHT



THE RANCH CORNER HOOD MUST BE MATCHED WITH ONE OF THE AVAILABLE FRAMES

FEATURES	PERFORMANCES			ACCESSORIES	FRAME FINISH
Finish • White RAL 9010	Speed	1	2	3	Cod. 112.0067.944 F3 Charcoal filter
Controls Electromechanical Slider	Air capacity IEC point	240	330	450	Cod. 112.0544.470 FLL3 Charcoal filter Long Lasting
Lighting 2 LED lights	Pressure	220	250	250	Cod. 112.0693.766 KIT FRAME ASH CORNER 90 C2 Frame finish ASH
Grease filter Cassettes dishwasher safe	Input	85	95	115	Cod. 112.0693.766 KIT FRAME ASH CORNER 90 C3 Frame finish ASH
Ø of air outlet 150 / 120 mm	Noise level	53	61	67	
Width 900 mm					
Energy class C					



Frame design C2



Frame design C3

Perfect in their every detail, extremely powerful, ideal for all-round kitchen use. Island workstation kitchens take on a central role in the house and in daily family life: cooking instantly develops into personal flair, passion, choice, an intimate, private activity. Island decorative hoods are attractive from all viewpoints, with perfect form in all its features: there is no hidden side or corner not seen by the naked eye. Characterised by symmetry and uniformity, illuminating the centre of our family lives.

ISLAND

BELLA SILENCE ISLAND	220
CHLOÈ ISLAND	231
CHLOÈ XL ISLAND	235
CORINTHIA ISLAND	225
CYLINDRA ISLAND	227
CYLINDRA ISLAND GLOSS PLUS	226
FOOD SET	238
GLASSY ISLAND	221
KIT MENSOLA	239
STILO COMFORT ISLAND	218
STILO GLASS SMART ISLAND	219
THEA ISLAND	237
T-SHELF	215
T-SHELF EVOLUTION	211
T-LIGHT ISLAND	217


T-SHELF EVOLUTION





THE NEW STAR OF THE KITCHEN

The new T-Shelf Evolution is the ideal choice for transforming your kitchen island into the focal point of the cooking area. This visually striking hood elegantly combines the functions of an island hood and a light fixture, showcasing the kitchen countertop with its truly extraordinary lighting.

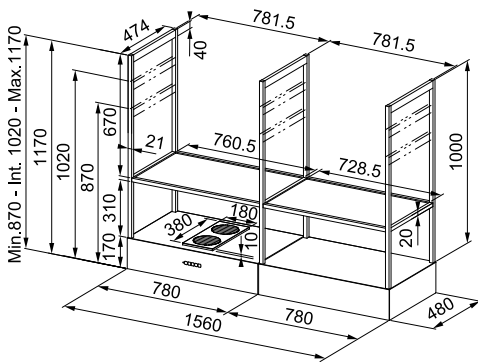

T-SHELF EVOLUTION NEW

T-SHELF EVOLUTION BK MATT KL F160 cod. 335.0727.000



FEATURES	PERFORMANCE	ACCESSORIES
Finish Black matt	Hood with 2 motors with a capacity of suction up to 600 m3/h	Cod. 112.0735.432
Controls 2 metal touch controls	Noise level max (dbA) 69	Long Lasting Filters Nanosorb
Lighting 2 LED light bar		
Grease filter Cassettes dishwasher safe		
Width 1600 mm		

Filter hoods are not subject to EU Regulation - (EU) 65/2014 & (EU) 66/2014





Black matt



Titanium matt





ELEGANT INDUSTRIAL STYLE

T-shelf is the iconic island hood with an elegant industrial style. With its trestle structure, exclusive smoked glass shelves and double LED bar with dimmer, this practical and smart solution contributes to complementing the kitchen environment.

T-SHELF

T-SHELF EV8 BK MATT A180 cod. 325.0606.131

T-SHELF EV8 TITANIUM MATT A180 cod. 325.0617.018

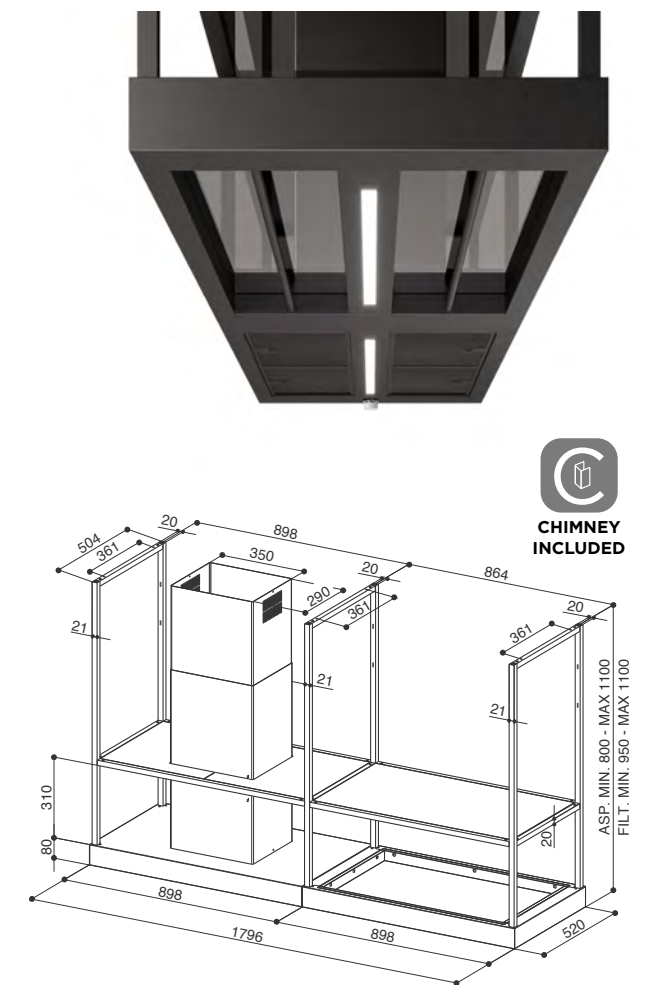


ISLAND

FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.243
• Black matt		Air capacity					F9 Charcoal filter
• Titanium matt		IEC point	290	460	610	710	Cod. 112.0185.276
Controls		Pressure	390	470	530	540	FLL9 Charcoal filter
Rotative controls		Input	130	165	210	250	Long Lasting
Lighting		Noise level	50	59	66	69	
2 LED light bar							
Grease filter							
Cassettes							
dishwasher safe							
Ø of air outlet							
150 / 120 mm							
Width							
1800 mm							
Energy class							
B							



Stainless steel

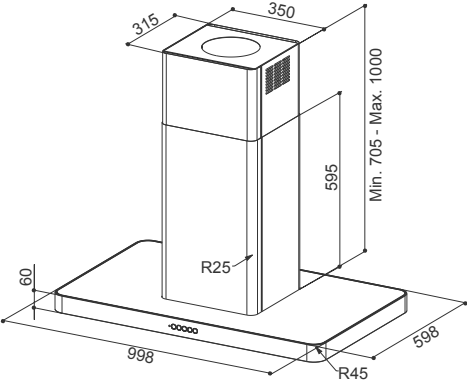

T-LIGHT ISOLA

T-LIGHT ISOLA EV8+ X A100 cod. 110.0456.264
T-LIGHT ISOLA EV8+ WH MATT A100 cod. 110.0456.265

SOUND PRO

PERIMETER ASPIRATION

INTENSIVE SPEED

REMOTE CONTROL (optional)

LED LIGHT




FEATURES	PERFORMANCE	ACCESSORIES
Finish • Stainless steel • White matt	Speed 1 2 3 INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Squarcle touch	Air capacity IEC point 270 410 580 700	Cod. 112.0676.782 Remote control
Lighting Perimeter LED light	Pressure 450 510 550 560	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe	Input 150 200 240 250	Cod. 112.0626.903 Kit Recycling Island T-Shape
Ø of air outlet 150 / 120 mm	Noise level 50 57 65 68	
Width 1000 mm		
Energy class A		

White matt




Black matt

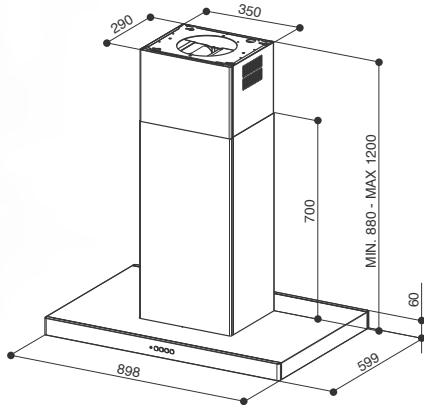

STILO COMFORT ISLAND

STILO COMFORT ISLAND X A90 cod. 325.0618.738
STILO COMFORT ISLAND WH MATT A90 cod. 325.0618.793
STILO COMFORT ISLAND BK MATT A90 cod. 325.0618.792




FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel • Black matt • White matt	Speed	1	2	3	INT	Cod. 112.0157.243
	Air capacity IEC point	290	460	610	710	F9 Charcoal filter
Controls Electronic	Pressure	390	470	530	540	Cod. 112.0327.007
	Input	130	165	210	250	ENERGY Remote blower kit
Lighting 4 LED lights	Noise level	50	59	66	69	Cod. 112.0327.631
						HFH Filter kit
Grease filter Cassettes dishwasher safe						Cod. 112.0185.276
						FLL9 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm						Cod. 112.0626.903
						Kit Recycling Island T-Shape
Width 900 mm						
Energy class B						

Stainless steel




White matt

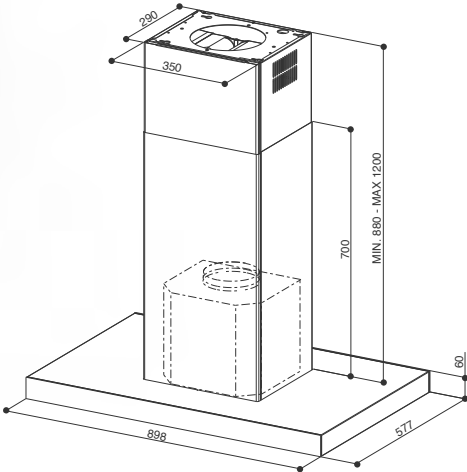


ISLAND

STILO GLASS SMART ISLAND

STILO GLASS SMART ISLAND A90 cod. 325.0618.802



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / Black glass	Speed	1	2	3	INT	Cod. 112.0157.243
	Air capacity IEC point	290	460	610	710	F9 Charcoal filter
Controls Touch control	Pressure	390	470	530	540	Cod. 112.0327.007
	Input	130	165	210	250	ENERGY Remote blower kit
Illuminazione 4 LED lights	Noise level	50	59	66	69	Cod. 112.0327.631
						HFH Filter kit
Filtro antigrasso Cassettes dishwasher safe						Cod. 112.0185.276
						FLL9 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm						Cod. 112.0626.903
						Kit Recycling Island T-Shape
Width 900 mm						
Energy class B						

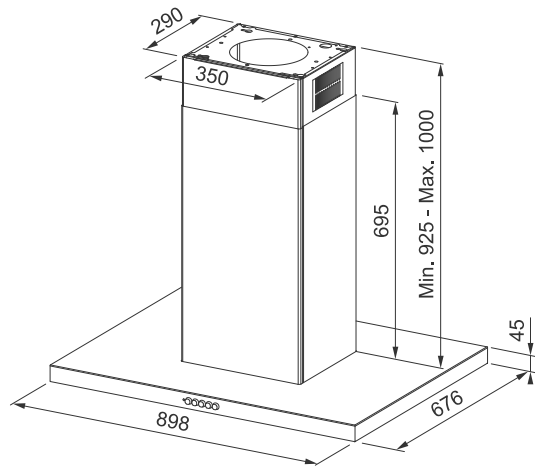


BELLA SILENCE ISLAND

BELLA SILENCE IS. X A90 cod. 325.0658.190




FEATURES	PERFORMANCE					ACCESSORIES
Finish •Stainless steel	Speed	1	2	3	INT	Cod. 112.0157.243
Controls Squarcle touch	Air capacity IEC point	285	365	470	750	F9 Charcoal filter
Lighting 4 LED lights	Pressure	450	490	510	560	Cod. 112.0676.782
Grease filter Stainless steel Cassettes dishwasher safe	Input	180	220	260	310	Remote control
Ø of air outlet 150 / 120 mm	Noise level	48	53	57	68	Cod. 112.0157.268
Width 900 mm						Upper chimney kit X
Energy class A+						Cod. 112.0327.007
						ENERGY Remote blower kit
						Cod. 112.0185.276
						FLL9 Charcoal filter Long Lasting
						Cod. 112.0626.903
						Kit Recycling Island T-Shape

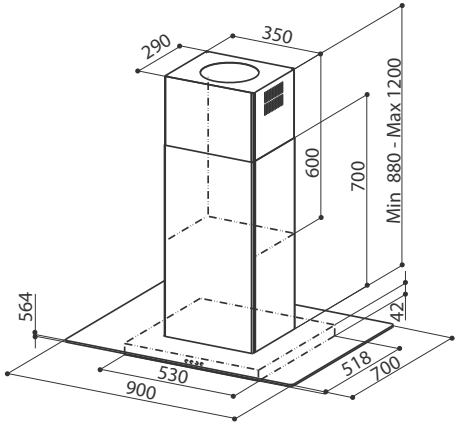

GLASSY ISLAND

GLASSY ISLAND/SP EV8 X/V NS A90 cod. 325.0617.019




FEATURES	PERFORMANCE					ACCESSORIES
Finish •Stainless steel / Glass	Speed	1	2	3	INT	Cod. 112.0157.243
Controls Electronic	Air capacity IEC point	300	450	600	700	F9 Charcoal filter
Lighting 4 LED lights	Pressure	390	470	530	540	Cod. 112.0157.288
Grease filter Cassettes dishwasher safe	Input	130	165	210	250	1 Baffle filter kit (order 2 kits)
Ø of air outlet 150 / 120 mm	Noise level	52	61	67	70	Cod. 112.0327.007
Width 900 mm						ENERGY Remote blower kit
Energy class B						Cod. 112.0185.276
						FLL9 Charcoal filter Long Lasting
						Cod. 112.0626.903
						Kit Recycling Island T-Shape



The control interface, now even more user-friendly and functional, is an iconic signature of the unmistakable Faber style.



DG MATT/CONCRETE
Dark grey matt/Concrete

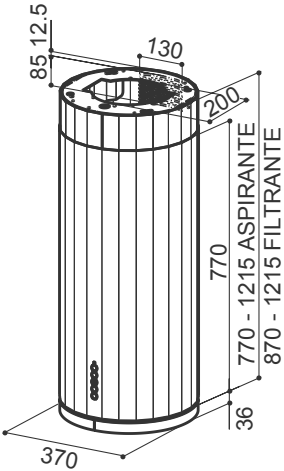

ISLAND

CORINTHIA ISLAND

CORINTHIA ISLAND EV8+ WH MATT/TS A37 cod. 110.0456.219
CORINTHIA ISLAND EV8+ DG MATT/CONCRETE A37 cod. 110.0456.220
CORINTHIA ISLAND EV8+ X/OM A37 cod. 110.0456.261




WH MATT/TS
White matt/Tibetan silver



X/OM
Stainless steel/Old metal



FEATURES	PERFORMANCE					ACCESSORIES
Finish • White matt / Tibetan silver • Dark grey matt / Concrete • Stainless steel / Old metal	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Squarcle touch	Air capacity IEC point	280	400	570	700	Cod. 112.0676.782 Remote control
Lighting Micro LED lights	Pressure	450	540	580	590	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	
Ø of air outlet 150 / 120 mm	Noise level	48	56	65	69	
Width 370 mm						
Energy class A						

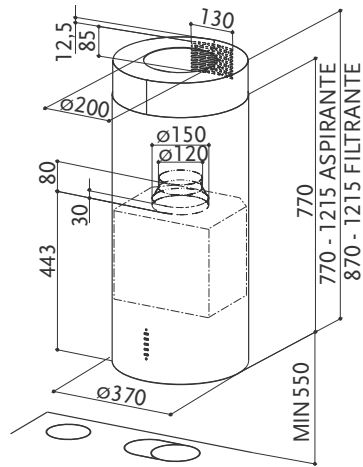


To be installed at a minimum distance from the hob of 55 cm.

CYLINDRA ISLAND GLOSS PLUS

CYLINDRA ISLAND GLOSS PLUS EV8+ WH A37 cod. 335.0492.563



FEATURES	PERFORMANCE					ACCESSORIES
Finish • White gloss	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic Led	Air capacity IEC point	280	400	570	700	Cod. 112.0676.782 Remote control
Lighting Micro LED Lights	Pressure	450	540	580	590	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0286.014 Upper chimney kit WH H990
Ø of air outlet 150 / 120 mm	Noise level	48	56	65	69	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Width 370 mm						
Energy class A						

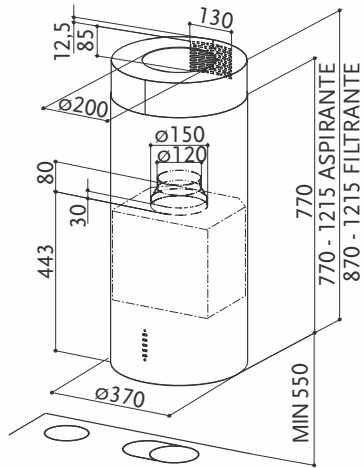

To be installed at a minimum distance from the hob of 55 cm.

CYLINDRA ISLAND

CYLINDRA ISLAND EV8 X A37 ELN cod. 110.0332.308




FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic Led	Air capacity IEC point	290	440	570	660	Cod. 112.0676.782 Remote control
Lighting 2 LED lights	Pressure	390	460	500	530	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	130	165	210	250	Cod. 112.0157.267 Upper chimney kit X
Ø of air outlet 150 / 120 mm	Noise level	46	58	65	68	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Width 370 mm						
Energy class B						



Dark grey matt - DG MATT



Cast iron - CI

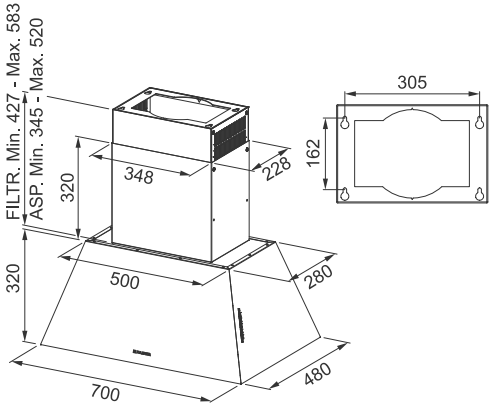

CHLOÈ ISLAND

CHLOE' ISLAND DG MATT A70 cod. 321.0666.589
CHLOE' ISLAND CI A70 cod. 321.0666.588

SOUND PRO

INTENSIVE SPEED

DELAY 30

HOUR 24

FILTER ALARM

REMOTE CONTROL
(optional)

LED LIGHT

A⁺

A⁺⁺⁺

↑

D

FEATURES		PERFORMANCE				ACCESSORIES
Finish		1	2	3	INT	Cod. 112.0157.240
• Dark grey matt • Cast iron						F8 Charcoal filter
Controls						Cod. 112.0676.782
Electronic Led						Remote control
Lighting						Cod. 112.0327.007
2 LED lights						ENERGY Remote blower kit
Grease filter						Cod. 112.0158.127
Cassettes dishwasher safe						FHP8 Charcoal filter High Performance
Ø of air outlet						Cod. 112.0185.278
150 /120 mm						FLL8 Charcoal filter Long Lasting
Width						
700 mm						
Energy class						
A+						

CHLOÈ XL ISOLA




Country grey matt - CG MATT



UNIQUE PERSONALITY EXPRESSED IN PERFORMANCE.

Some ideas cast new light on everything around them: even colours, flavours and everyday gestures. In a dull, uniform world they epitomise newness, inspire beauty and establish a new sense of proportion. Chloè XL Island is one of these ideas. Designed to take style to a higher level, Chloè XL Island adds the excitement of broader horizons and new dimensions to your kitchen.

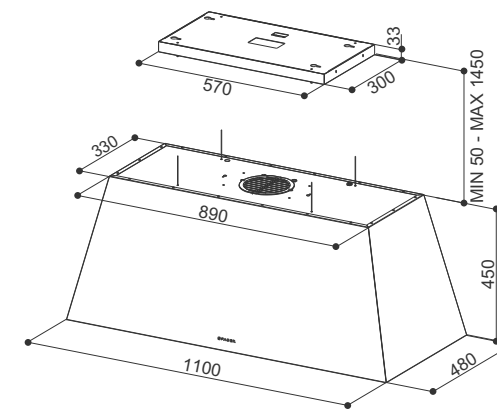

ISLAND

CHLOÈ XL ISLAND

CHLOÈ XL ISLAND CG MATT F110 cod. 321.0506.537
CHLOÈ XL ISLAND CI F110 cod. 321.0506.538



Cast iron - CI



* Ducted installation

FEATURES		PERFORMANCE				ACCESSORIES
Finish		1	2	3	INT	Cod. 112.0157.240
• Country grey matt • Cast iron						F8 Charcoal filter
Controls						Cod. 112.0516.426*
Electromechanical Knob						Chimney kit island Cast iron
Lighting						Cod. 112.0516.427*
2 LED						Chimney kit island Country grey matt
Grease filter						Cod. 112.0158.127
Cassettes dishwasher safe						FHP8 Charcoal filter High Performance
Ø of air outlet						Cod. 112.0185.278
150 /120 mm						FLL8 Charcoal filter Long Lasting
Width						Cod. 112.0691.642
1100 mm						Cable Extension Kit
Energy class						
C						

*Needed for ducted
installation

Dark grey matt / stainless steel frame



Dark grey matt / durmast wood frame




* Ducted installation

White matt / stainless steel frame



White matt / durmast wood frame

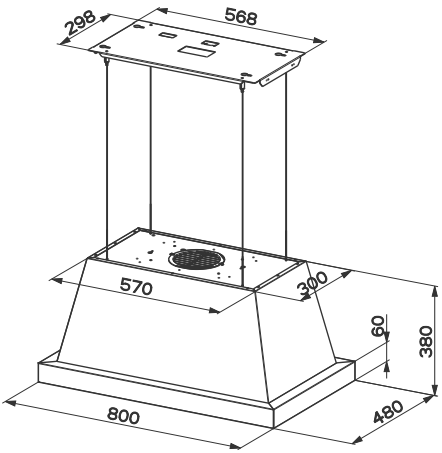

THEA ISLAND

THEA ISLAND EV8 WH MATT F80 SC cod. 321.0517.781
THEA ISLAND EV8 DG MATT F80 SC cod. 321.0517.782



THE THEA ISLAND HOOD MUST BE MATCHED WITH ONE OF THE AVAILABLE FRAMES

FEATURES	PERFORMANCE	ACCESSORIES	FRAME FINISH
Finish • White matt • Dark grey matt	Speed 1 2 3 INT Air capacity IEC point 310 470 620 740 Pressure 390 460 500 530 Input 130 165 210 250 Noise level 49 58 64 67	Cod. 112.0157.240 F8 Charcoal filter Cod. 112.0516.428* Chimney kit island White matt Cod. 112.0516.430* Chimney kit island Dark grey matt Cod. 112.0158.127 FHP8 Charcoal filter High Performance Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting Cod. 112.0691.642 Cable Extension Kit	Cod. 112.0516.431 Kit stainless steel frame Thea Island 800mm  Cod. 112.0516.432 Kit durmast frame Thea Island 800mm 
Controls Electronic			
Lighting 2 LED lights			
Grease filter Cassettes dishwasher safe			
Ø of air outlet 150 /120 mm			
Width 800 mm			
Energy class B			

*Needed for ducted installation



FOOD SET

FOOD SET cod. 112.0524.622


This professional food set boasts impressive and exclusive characteristics, including a base made from Krion, produced with the **Krion Eco-Active Solid Technology™**. This new technology present in Krion™ Eco-Active resides in incorporating a series of activators into the product, specially developed by Krion, which when in contact with any type of light, provide Krion™ Eco-Active with the following new properties: Air purification, Anti-bacteria, Selfcleaning and Elimination of chemical products. A large number of compounds that are dangerous to our health have been eliminated, such as pesticides present in our surroundings, and especially in the foods we consume.

FEATURES

Material: Krion base
Finish: White
Non-porous surface
Anti-bacterial properties
Made from fully recyclable, ecological material
Tough and long-lasting
Dimensions: 440x200x10 mm

MAINTENANCE
Dishwasher washable.
Self-cleaning: liquids and dirt can be cleaned from the surface of the material with greater ease, reducing the use of detergents. To remove stubborn dirt and surface scratches, clean with a dry, slightly abrasive kitchen sponge.

Material: Solid wood insert
Finish: Durmast
ORDINARY MAINTENANCE: Wite with a damp sponge and dry with a cloth.
SPECIAL MAINTENANCE: To nourish the wood and keep the colour bright, pass a cloth dipped in a few drops of cooking oil.

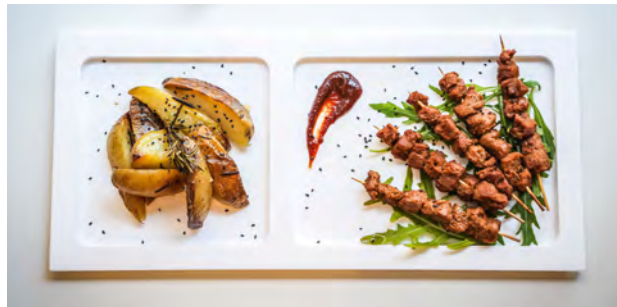

The base is specially shaped to contain the set's washable food bag and solid wood cutting board. In this set, three practical accessories combine to form a unique solution. The Thea food set is ideal for the elegant presentation of bread, charcuterie, cheese and fruit, and for use as a simple but chic platter to serve guests at important occasions with rustic aperitifs and finger foods.

KIT MENSOLA

SHELF KIT
KIT SHELF cod. 112.0527.474

This wood shelf kit is a great way to add value to your kitchen. Simple and compatible with all styles, this accessory blends great functionality and attractive design.

FEATURES

Material: Wood
Finish: Durmast
Shelf bracket: Internal
Dimensions: 600x400x30 mm

ORDINARY MAINTENANCE: For normal cleaning, simply dust the top with a soft cloth.
SPECIAL MAINTENANCE: Every 2 or 3 months the wooden surface must be polished using a commercially available beeswax product in a colour specific to the type of wood.
NEVER use aggressive detergents or water, as these may damage the surface varnish over time.



We recommend combining it with Thea and Thea Island hoods that have frame in the same durmast wood finish.



The Suspended cooker hoods were created to represent the perfect integration of design and wellbeing. The design is absolutely extraordinary and astounds the observer due to its ability to revolutionise the concept of cooker hood lighting, transforming it into a real point of light for the kitchen area. The products are technologically advanced and perfectly shaped, offering the user freedom of movement within the cooking zone. In a simple movement, elegance becomes functionality.

SUSPENDED

BEAT	249
BEAT XL	245
BELLE	253
BELLE PLUS	253
CÉLINE PLUS	257
LYBRA PLUS	264
NEST PLUS	266
PAREO PLUS	265
ODETTE PLUS	261
SOFT CUBE	263
ZOOM PLUS	267

BEAT XL



SUSPENDED




reddot winner 2023



NEW

Dark Forest

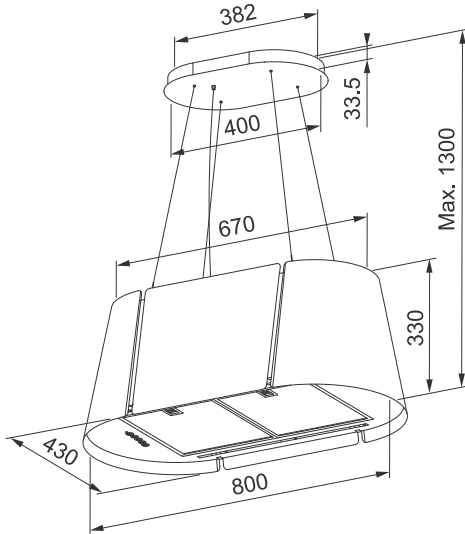


To be installed at a minimum distance from the hob of 65 cm.

BEAT XL

BEAT XL WH MATT F80 cod. 345.0709.184

BEAT XL BK MATT F80 cod. 345.0698.955

BEAT XL DF/BK MATT KL F80 cod. 345.0740.253*



White matt



Black matt



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.240
• White matt • Black matt • Dark Forest / Black matt		Air capacity IEC point	290	420	590	750	F8 Charcoal filter
Controls		Pressure	450	540	600	630	Cod. 112.0158.127
Soft Touch		Input	150	200	240	250	FHP8 Charcoal filter High Performance
Lighting		Noise level	48	55	63	68	Cod. 112.0185.278
2 LED light bar							FLL8 Charcoal filter Long Lasting
Grease filter							Cod. 112.0691.642
Cassettes dishwasher safe							Cable Extension Kit
Ø of air outlet							
150 / 120 mm							
Width							
800 mm							
Energy class							
A							






NEW

Dark Forest



FRESH AND SIMPLE LINES

Beat is a new model of suspended hood identified by fresh and simple lines with two panels arranged side-by-side.

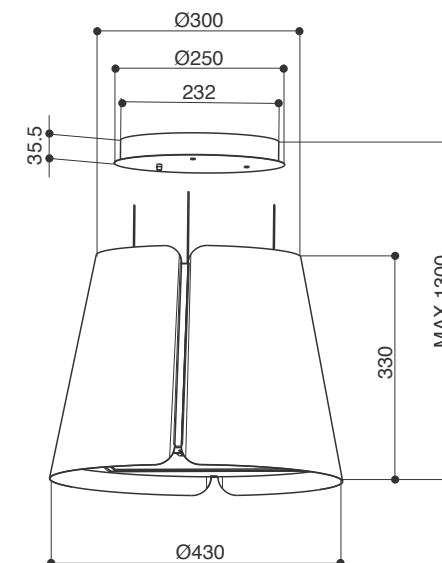

Stainless steel / Black matt



Titanium matt



Black Gloss



Black matt



White matt



Dark grey matt



Dusty blue matt



BEAT

BEAT BK MATT F45 cod. 345.0612.337
BEAT WH MATT F45 cod. 345.0612.338
BEAT X/BK MATT F45 cod. 345.0655.177
BEAT TITANIUM MATT F45 cod. 345.0655.178

BEAT BK GLOSS F45 cod. 345.0657.025
BEAT DG MATT F45 cod. 345.0612.339
BEAT DB MATT F45 cod. 345.0612.340
BEAT DF/BK MATT F45 cod. 345.0740.252




FEATURES	PERFORMANCE					ACCESSORIES
Finish • White matt • Black matt • Dark grey matt • Dusty blue matt • Stainless steel / Black matt • Titanium matt • Black Gloss • Dark Forest / Black matt	Speed	1	2	3	INT	Cod. 112.0157.240
	Air capacity IEC point	270	410	580	740	F8 Charcoal filter
	Pressure	450	540	570	580	Cod. 112.0158.127
	Input	150	200	240	250	FHP8 Charcoal filter High Performance
	Noise level	53	59	66	70	Cod. 112.0185.278
Controls Electronic						FLL8 Charcoal filter Long Lasting
Lighting 2 LED lights						Cod. 112.0691.642
Grease filter Cassettes dishwasher safe						Cable Extension Kit
Ø of air outlet 150 mm						
Width 430 mm						
Energy class A						



Gold / warm dark grey matt



**ADVANCED TECHNOLOGY,
UNIQUE DESIGN**
As beautiful as its name suggests, the Belle hood features a design that is both eye-catching and elegant. Its double panel creates an effect reminiscent of the petals of a flower. Available in two refined finishes, the original, asymmetrically shaped Belle hood is made even more desirable by Up & Down action and by the technology that has made Faber the number one name in kitchen hoods.

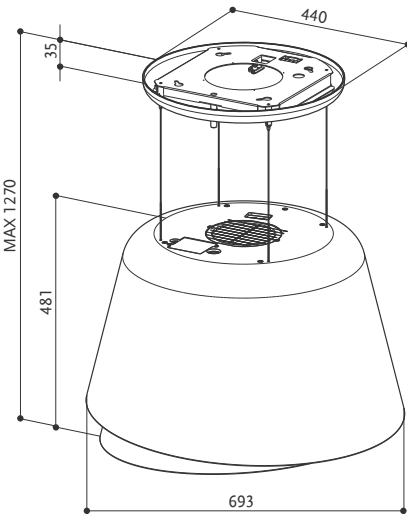

BELLE PLUS



BELLE PLUS GOLD/WARM DG MATT KL cod. 345.0541.068

BELLE

BELLE GOLD/WARM DG MATT KL cod. 345.0541.066



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.240
• Gold / Warm dark grey matt		Air capacity IEC point	240	370	510	620	F8 Charcoal filter
Controls		Pressure	410	490	550	560	Cod. 112.0158.127
Touch control		Input	150	200	240	250	FHP8 Charcoal filter High Performance
Lighting		Noise level	46	53	61	65	Cod. 112.0185.278
Perimetral LED light							FLL8 Charcoal filter Long Lasting
Grease filter							Cod. 112.0542.875
Cassettes dishwasher safe							Airlane ducting kit
Ø of air outlet							Cod. 112.0691.642
150 mm							Cable extension kit _only for BELLE model
Width							
695 mm							
Energy class							
A							

SUSPENDED




Warm white / Country grey matt



THE CONICAL HOOD. A MODERN CLASSIC

A thin line of stainless steel enriches the top part of this original, conical hood, which is also available with a bottom section in a different finish. The contemporary, essential design of Céline is made even more striking by Up& Down technology. The hood can be raised to the ceiling when not in use and lowered again whenever its extraordinary performance is needed. Céline comes in a choice of matt country grey and warm white.

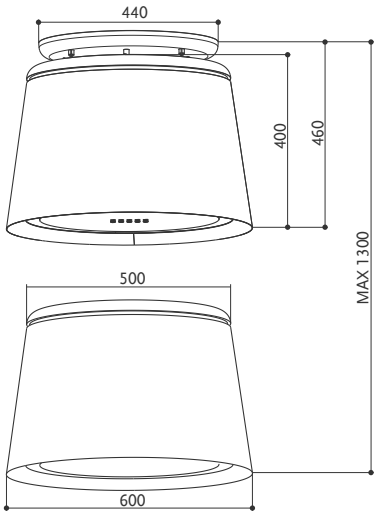

CÈLINE PLUS

CÈLINE PLUS WW/CG MATT KL cod. 345.0541.064



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Warm white / Country grey matt	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Touch control	Air capacity IEC point	240	370	510	620	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting Perimetral LED light	Pressure	410	490	550	560	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0542.875 Airlane ducting kit
Ø of air outlet 150 mm	Noise level	46	53	61	65	
Width 600 mm						
Energy class A						



Cèline equipped with Airlane ducting Kit optional

ODETTE PLUS




Black matt



Odette equipped with Airline ducting Kit optional

TECHNOLOGY IN CYLINDRICAL FORM
Matt black or matt grey?
In either shade, the perfect cylinder that encloses Odette's high-tech heart adds a touch of unmistakable, contemporary style to any kitchen. Up&Down action makes Odette discrete, functional and able to satisfy the needs of every day cooking.

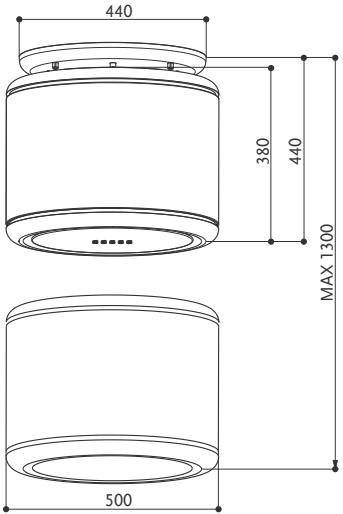


ODETTE PLUS

ODETTE PLUS BK MATT KL cod. 345.0541.053




FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed					Cod. 112.0157.240
• Black matt		1 2 3 INT					F8 Charcoal filter
Controls		Air capacity IEC point					Cod. 112.0158.127
Touch control		240 370 510 620					FHP8 Charcoal filter High Performance
Lighting		Pressure					Cod. 112.0185.278
Perimetral LED light		Input					FLL8 Charcoal filter Long Lasting
Grease filter		Noise level					Cod. 112.0542.875
Cassettes dishwasher safe		46 53 61 65					Airline ducting kit
Ø of air outlet							
150 mm							
Width							
500 mm							
Energy class							
A							


Nero Ingo
Black

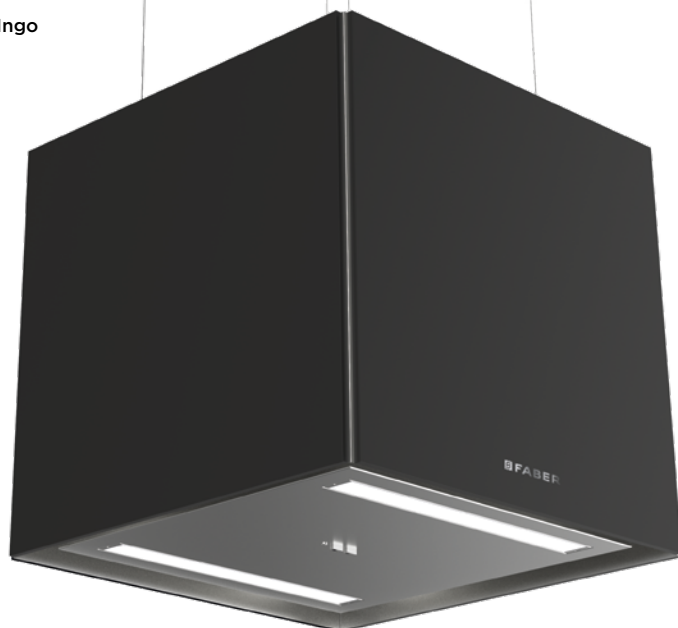


Bianco Kos
White

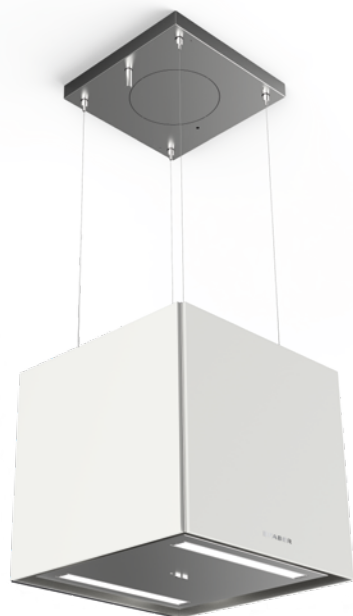

Grigio Londra
Grey

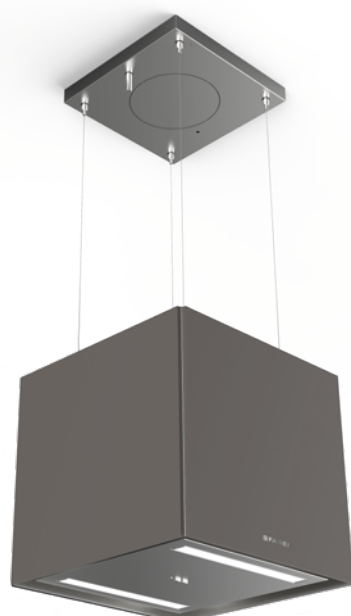

TOUCH & FEEL SURFACE WITH FENIX
SOFT CUBE The geometrically shaped Soft Cube light fitting solution is coated with Fenix®, a hi-tech material with unique characteristics it is soft to the touch, silky smooth, smudge-proof and water-repellent. It is very easy to clean and perfectly integrates into modern and elegant kitchen environments.

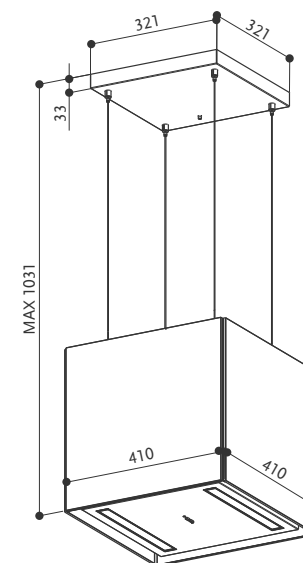


SOFT CUBE

SOFT CUBE BIANCO KOS F40 cod. 345.0607.586
SOFT CUBE GRIGIO LONDRA F40 cod. 345.0607.589
SOFT CUBE NERO INGO F40 cod. 345.0607.590



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.240
• FENIX NTM Grigio Londra - Grey • FENIX NTM Bianco Kos - White • FENIX NTM Nero Ingo - Black		Air capacity IEC point	280	400	570	700	F8 Charcoal filter
Controls		Pressure	450	540	580	590	Cod. 112.0158.127
Electronic		Input	150	200	240	250	FHP8 Charcoal filter High Performance
Lighting		Noise level	48	56	64	68	Cod. 112.0185.278
2 LED lights							FLL8 Charcoal filter Long Lasting
Grease filter							Cod. 112.0691.642
Cassettes dishwasher safe							Cable Extension Kit
Ø of air outlet							
150 mm							
Width							
409 mm							
Energy class							
A							

Stainless steel / Glass

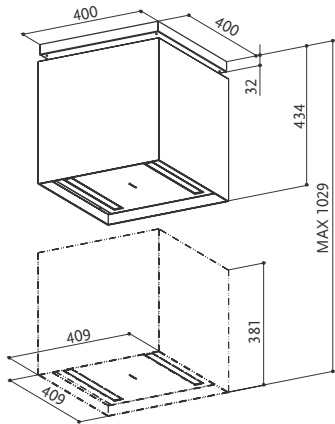


LYBRA PLUS

LYBRA PLUS KL cod. 110.0255.507



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / Glass	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Electronic	Air capacity IEC point	280	400	570	700	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting 2 LED lights	Pressure	450	540	580	590	Cod. 112.0169.216 F-LIGHT ducting kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Ø of air outlet 150 mm	Noise level	48	56	64	68	
Width 409 mm						
Energy class A						

Stainless steel

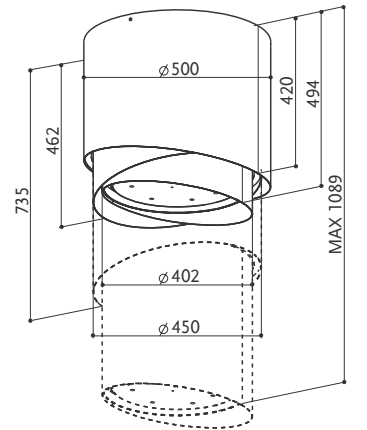

PAREO PLUS

PAREO PLUS KL cod. 345.0492.593

PAREO PLUS TIBETAN SILVER KL cod. 345.0492.594



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel • Tibetan silver	Speed	1	2	3	INT	-
Controls Electronic	Air capacity IEC point	260	400	560	670	
Lighting Micro LED Lights	Pressure	450	510	550	580	
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	
Ø of air outlet 150 mm	Noise level	50	58	64	69	
Width 500 mm						
Energy class A						

Tibetan silver




The model is exclusively available in the extraction version



NEST PLUS

NEST PLUS KL cod. 345.0492.592
KIT 6 LED G9 2,5 W cod. 112.0505.117



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / Glass	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Electronic	Air capacity IEC point	260	400	560	670	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting Micro LED Lights	Pressure	450	510	550	580	Cod. 112.0505.117 Kit 6 LED G9 2,5 W
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0169.216 F-LIGHT ducting kit
Ø of air outlet 150 mm	Noise level	50	58	64	69	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Width 860 mm						
Energy class A						



ZOOM PLUS

ZOOM PLUS cod. 345.0492.568



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel	Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Electronic	Air capacity IEC point	260	400	560	670	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting Micro LED Lights	Pressure	450	510	550	580	Cod. 112.0169.216 F-LIGHT ducting kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Ø of air outlet 150 mm	Noise level	50	58	64	69	
Width 400 mm						
Energy class A						

HOB


FBH32	277
FBH64	276
FCH64	275
FCH84	274
FCH95	272
FCH SLIM 94	273

FCH84







STANDARD INSTALLATION

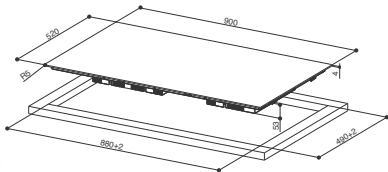

FLUSH FIT INSTALLATION

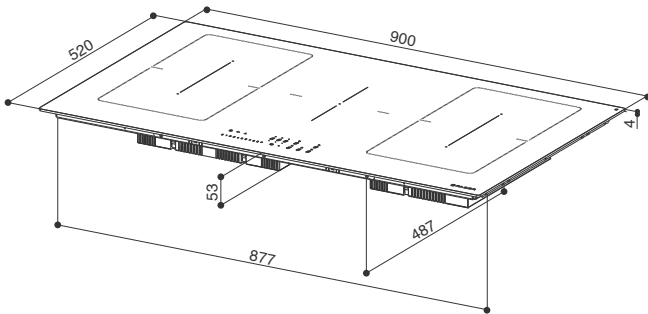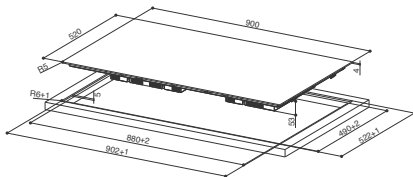

FCH95

FCH 95 BK KL cod. 108.0604.943




FEATURES	FUNCTIONS		POWER COOKING ZONE		
Finish • Black glass	K-Link* with hood	Yes	1 Cooking zone	2100 W 3000 W Booster	210x190
Product dimensions LxW (mm) 900x520	Flexi Cooking	Yes (2 zone)	2 Cooking zone	2100 W 3000 W Booster	210x190
Induction zone 5	Booster	Yes	3 Cooking zone	2300 W 3000 W Booster	Ø 200
Controls Slider Touch 9 levels	Child proof-lock	Yes	4 Cooking zone	2100 W 3000 W Booster	210x190
Power (W) 7400	Timer	Yes	5 Cooking zone	2100 W 3000 W Booster	210x190
Voltage (V) 220/240	Pause/Recall	Yes			
Frequency (HZ) 50/60	Overflow safety device	Yes			
	Automatic heat-up	Yes			
	Pot Detection	Yes			
	Residual Heat indication	Yes			
	Power Limitation	2500w/ 3000w/ 3500w/ 4000w/ 5000w/ 6000w/ full			



*Requires a Faber hood with K-Link function



STANDARD INSTALLATION

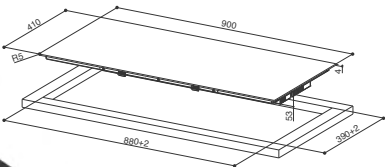

FLUSH FIT INSTALLATION

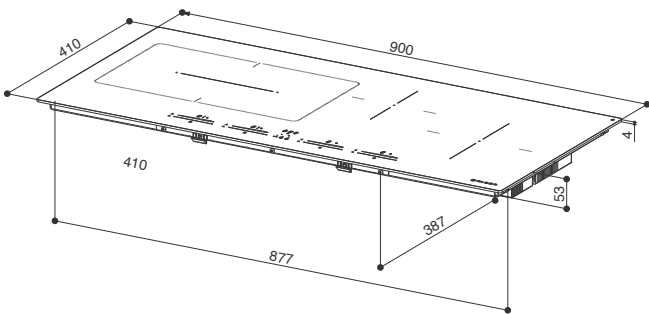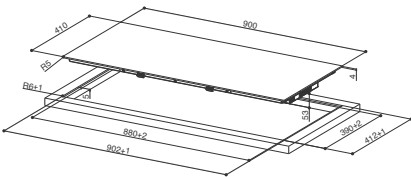

FCH SLIM 94

FCH SLIM 94 BK KL cod. 108.0604.942



FEATURES	FUNCTIONS		POWER COOKING ZONE		
Finish • Black glass	K-Link* with hood	Yes	1 Cooking zone	2100 W 3000 W Booster	210x190
Product dimensions LxW (mm) 900x410	Flexi Cooking	Yes	2 Cooking zone	2100 W 3000 W Booster	210x190
Induction zone 4	Booster	Yes	3 Cooking zone	1400 W 2100 W Booster	Ø 160
Controls Multi-Slider Touch 9 levels	Child proof-lock	Yes	4 Cooking zone	2300 W 3000 W Booster	Ø 200
Power (W) 7400	Timer	Yes			
Voltage (V) 220/240	Pause/Recall	Yes			
Frequency (HZ) 50/60	Overflow safety device	Yes			
	Automatic heat-up	Yes			
	Pot Detection	Yes			
	Residual Heat indication	Yes			
	Power Limitation	2500w/ 3000w/ 3500w/ 4000w/ 5000w/ 6000w/ full			

*Requires a Faber hood with K-Link function


NEW

FABER
FRANKE'S AIR EXPERT 70 YEARS



Dark Forest



STANDARD INSTALLATION

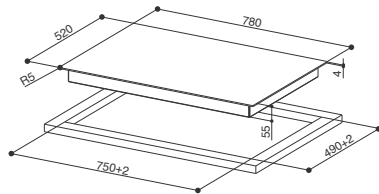

FLUSH FIT INSTALLATION

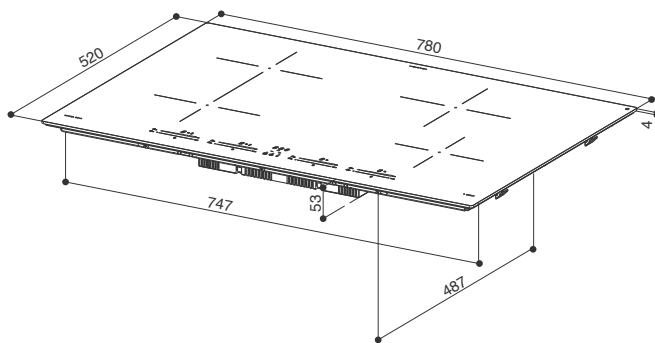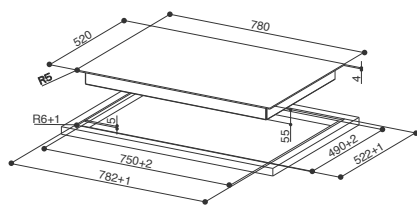

FCH84

FCH 84 BK KL cod. 108.0604.935
FCH 84 DF KL cod. 108.0740.871




HOOD&HOB



FEATURES	FUNCTIONS	POWER COOKING ZONE
Finish • Black glass • Dark Forest glass	K-Link* with hood Yes	1 Cooking zone 2100 W 3000 W Booster 210x190
Product dimensions LxW (mm) 780x520	Flexi Cooking Yes	2 Cooking zone 2100 W 3000 W Booster 210x190
Induction zone 4	Booster Yes	3 Cooking zone 2300 W 3000 W Booster Ø 200
Controls Slider Touch 9 levels	Child proof-lock Yes	4 Cooking zone 1400 W 2100 W Booster Ø 160
Power (W) 7400	Timer Yes	 Black glass
Voltage (V) 220/240	Pause/Recall Yes	
Frequency (HZ) 50/60	Automatic heat-up Yes	
	Pot Detection Yes	
	Residual Heat indication Yes	
	Power Limitation 2500w/ 3000w/ 3500w/ 4000w/ 5000w/ 6000w/ full	

*Requires a Faber hood with K-Link function

STANDARD INSTALLATION

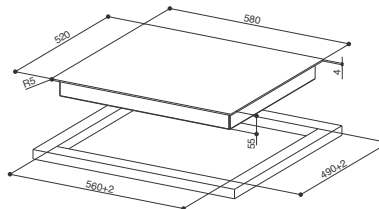

FLUSH FIT INSTALLATION

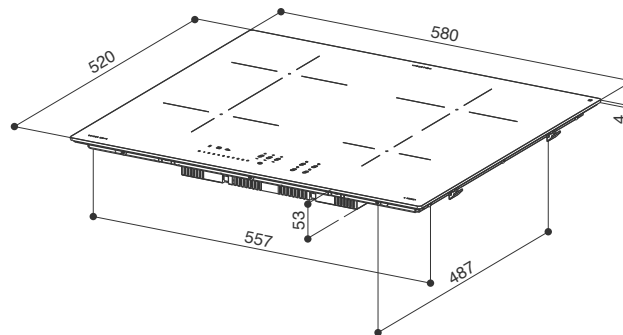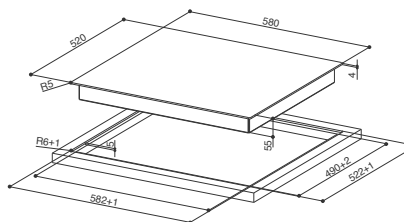

FCH64

FCH 64 BK KL cod. 108.0604.933



HOOD&HOB

FEATURES	FUNCTIONS	POWER COOKING ZONE
Finish • Black glass	K-Link* with hood Yes	1 Cooking zone 2100 W 3000 W Booster 210x190
Product dimensions LxW (mm) 580x520	Flexi Cooking Yes	2 Cooking zone 2100 W 3000 W Booster 210x190
Induction zone 4	Booster Yes	3 Cooking zone 2300 W 3000 W Booster Ø 200
Controls Slider Touch control	Child proof-lock Yes	4 Cooking zone 1400 W 1850 W Booster Ø 145
Power (W) 7400	Timer Yes	
Voltage (V) 220/240	Pause/Recall Yes	
Frequency (HZ) 50/60	Overflow safety device Yes	
	Automatic heat-up Yes	
	Pot Detection Yes	
	Power Limitation Residual Yes	
	Power Limitation 2500w/ 3000w/ 3500w/ 4000w/ 5000w/ 6000w/ full	

*Requires a Faber hood with K-Link function

NEW

FABER
FRANKE'S AIR EXPERT 70 YEARS

Dark Forest




FBH64



FBH 64 BK FFI cod. 108.0604.932
FBH 64 DF cod. 108.0740.800



STANDARD INSTALLATION

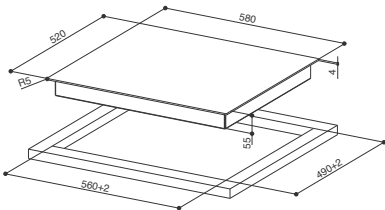


FLUSH FIT INSTALLATION

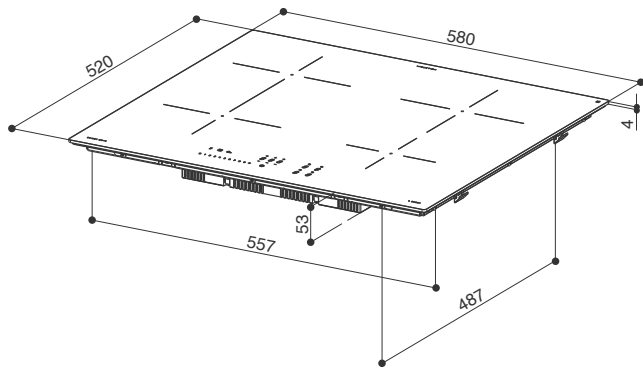
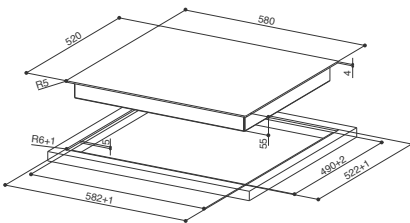


FEATURES	FUNCTIONS		POWER COOKING ZONE		
Finish • Black glass • Dark Forest glass	K-Link with hood	No	1 Cooking zone 1400 W 2100 W Booster 2 Cooking zone 1400 W 2100 W Booster 3 Cooking zone 2300 W 3000 W Booster 4 Cooking zone 1400 W 1850 W Booster	Ø 160 Ø 200 Ø 145	
Product dimensions LxW (mm) 580x520	Flexi Cooking	No			
Induction zone 4	Booster	Yes			
Controls Touch a 9 livelli	Child proof-lock	Yes			
Power (W) 7400	Timer	Yes			
Voltage (V) 220/240	Pause/Recall	No			
Frequenza (HZ) 50/60	Overflow safety device	Yes			
	Automatic heat-up	No			
	Pot Detection	Yes			
	Residual Heat indication	Yes			
	Power Limitation	2500w/ 3000w/ 3500w/ 4000w/ 5000w/ 6000w/ full			

STANDARD INSTALLATION

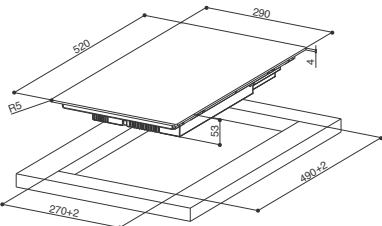

FLUSH FIT INSTALLATION

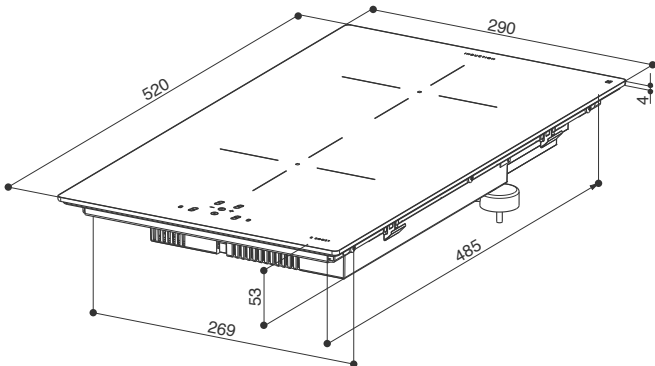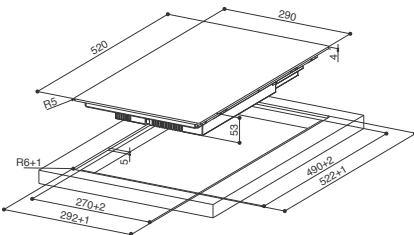

FBH32

FBH 32 BK FFI cod. 108.0604.931



FEATURES	FUNCTIONS		POWER COOKING ZONE		
Finish • Black glass	K-Link with hood	No	1 Cooking zone	1400 W 2100 W Booster	Ø 160
Product dimensions LxW (mm) 290x520	Flexi Cooking	No		2 Cooking zone	1400 W 2100 W Booster
Induction zone 2	Booster	Yes			
Controls Touch 9 levels	Child proof-lock	Yes			
Power (W) 3700	Timer	Yes			
Voltage (V) 220/240	Pause/Recall	No			
Frequency (HZ) 50/60	Overflow safety device	Yes			
	Automatic heat-up	No			
	Pot Detection	Yes			
	Residual Heat indication	Yes			
	Power Limitation	1500W/ 2000W/ 2500W/ 3000W/ 3500W/ full			

Progress is expressed in the extremely clearcut design of a perfect hideaway structure. The innovative, minimal look make this model hood with ceiling installation a design item that hides high performance thanks to the perimeter suction technology employed. The perfect balance of function and form, where technology does its utmost to ensure comfort and practicality, with a discreet presence in the kitchen.

CEILING

HEAVEN 2.0	307
HEAVEN 2.0 FLAT	306
HEAVEN AIR	301
HEAVEN BRIGHT	299
HEAVEN DUAL LIGHT	295
HEAVEN GLASS 2.0 FLAT	306
HEAVEN LIGHT PRO	305
HEAVEN PEARL WHITE	291
HIGH-LIGHT	286
INSIDE UP	283
SKYPAD 2.0	287






Stainless steel

White matt

ESSENTIAL AND ICONICAL STYLE
An iconic and extremely distinctive design turns the Inside-Up ceiling hood into a precious decor element, able to enhance interior design with the help of its unique and tunable light.

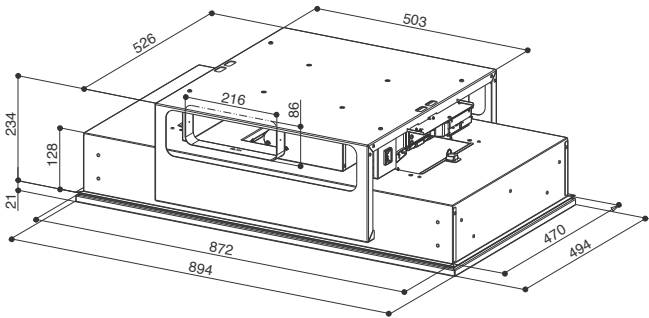

INSIDE UP


INSIDE UP IX KL A90 cod. 305.0615.739
INSIDE UP WH KL A90 cod. 305.0615.740



FEATURES		PERFORMANCE					ACCESSORIES
Finish • White matt • Stainless steel		Speed	1	2	3	INT	Cod. 112.0471.608 F18-90 Charcoal filter
		Air capacity IEC point	330	490	600	700	
Controls Touch control		Pressure	150	310	510	700	
		Input	30	65	115	145	
Lighting Perimetral LED light		Noise level	56	65	70	73	
Grease filter Cassettes dishwasher safe							
Ø of air outlet 150 / 120 mm							
Width 900 mm							
Energy class B							



Black matt

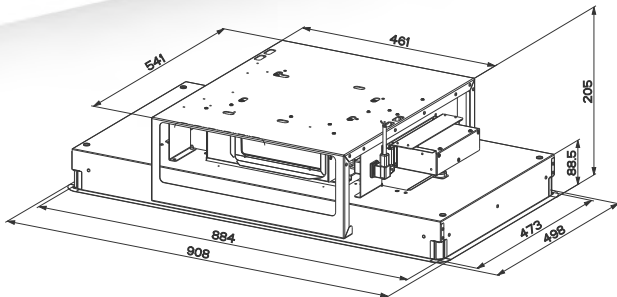

HIGH-LIGHT

HIGH-LIGHT X KL A91/2 cod. 350.0663.962
HIGH-LIGHT BK MATT KL A91/2 cod. 350.0663.963
HIGH-LIGHT WH MATT KL A91/2 cod. 350.0663.964



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel • White matt • Black matt	Speed	1	2	3	INT	Cod. 112.0471.608 F18-90 Charcoal filter
Controls Electronic Led	Air capacity IEC point	165	350	490	700	
Lighting Perimeter LED light	Pressure	40	150	320	700	
Grease filter Cassettes dishwasher safe	Input	10	30	65	145	
Ø of air outlet 220 x 90 mm	Noise level	40	58	65	72	
Width 910 mm						
Energy class A+						


Stainless steel



White matt



Model not built-in into the ceiling

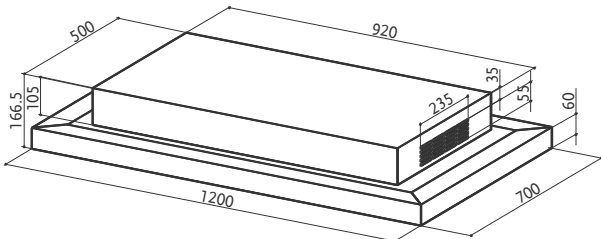

SKYPAD 2.0

SKYPAD 2.0 X/WH F120 cod. 110.0479.462



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / White glass	Speed	1	2	3	INT	Cod. 112.0329.928 FHP14 Charcoal filter High Performance
Controls Electronic Led	Air capacity IEC point	440	600	780	850	
Lighting 2 LED lights	Pressure*	-	-	-	-	
Grease filter Cassettes dishwasher safe	Input	60	90	140	180	
Ø of air outlet -	Noise level	57	64	70	72	
Width 1200 mm						
Energy class - *						
Blowers 2						

* Data not declared, as the model is exclusively available in the recycling version.

HEAVEN PEARL WHITE




CEILING



THE CHARM OF AN ESSENTIAL DESIGN

The new Heaven Pearl White is an invisible hood featuring perimeter lighting that will add an extra touch of functionality and visual comfort, while creating a welcoming and clutter-free environment.

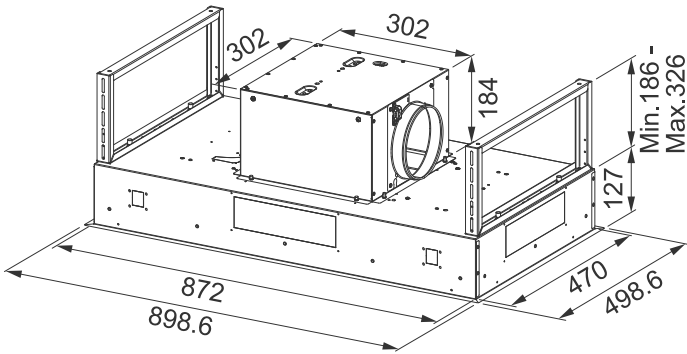

HEAVEN PEARL WHITE

NEW

HEAVEN PEARL WHITE A90 cod. 350.0731.514



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.240
• White matt NCS S 500 N		Air capacity IEC point	280	420	590	760	F8 Charcoal filter
Controls		Pressure	470	550	590	600	Cod. 112.0158.127
Electronic Led		Input	150	200	240	250	FHP8 Charcoal filter High Performance
Lighting		Noise level	49	59	67	70	Cod. 112.0185.278
Perimetral LED light							FLL8 Charcoal filter Long Lasting
Grease filter							Cod. 112.0327.007
Cassettes dishwasher safe							ENERGY Remote blower kit
Ø of air outlet							
150 / 120 mm							
Width							
900 mm							
Energy class							
B							

HEAVEN DUAL LIGHT






White glass



Stainless steel

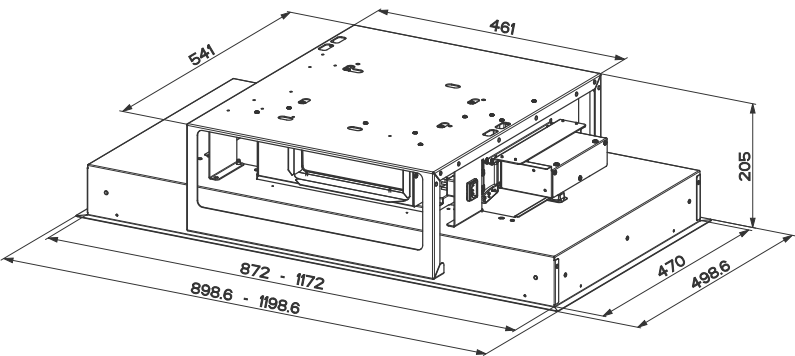

HEAVEN DUAL LIGHT

HEAVEN DUAL LIGHT A90 G/WH FLAT cod. 350.0679.874
HEAVEN DUAL LIGHT A90 X FLAT cod. 350.0679.875
HEAVEN DUAL LIGHT A120 G/WH FLAT cod. 350.0679.876




FEATURES		PERFORMANCE					ACCESSORIES
Finish • White glass • Stainless steel		Speed 1 2 3 INT BOOST					Cod. 112.0471.608
Controls Electronic Led		Air capacity IEC point 200 350 400 520 720					F18-90 Charcoal filter
Lighting 2 LED lights		Pressure 190 500 520 530 540					
Grease filter Cassettes dishwasher safe		Input 15 60 85 220 250					
Ø of air outlet 150 mm		Noise level 43 56 59 65 72					
Width 900 / 1200 mm							
Energy class A+							



Stainless steel



White glass

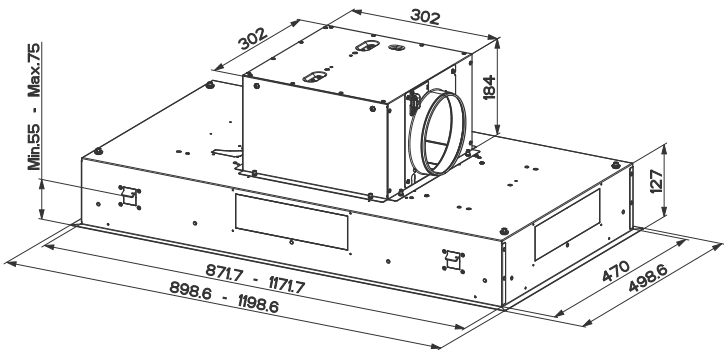

HEAVEN BRIGHT


HEAVEN BRIGHT A90 X KL cod. 350.0679.871
HEAVEN BRIGHT A90 G/WH KL cod. 350.0679.872
HEAVEN BRIGHT A120 G/WH KL cod. 350.0679.873



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.240
• White glass • Stainless steel	Air capacity IEC point	280	410	590	750	F8 Charcoal filter
Controls	Pressure	470	540	580	590	Cod. 112.0327.007
Electronic Led	Input	150	200	240	250	ENERGY Remote blower kit
Lighting	Noise level	46	55	63	67	Cod. 112.0158.127
2 LED lights						FHP8 Charcoal filter High Performance
Grease filter						Cod. 112.0185.278
Cassettes dishwasher safe						FLL8 Charcoal filter Long Lasting
Ø of air outlet						
150 / 120 mm						
Width						
900 / 1200 mm						
Energy class						
A						



AIR QUALITY ALWAYS AT HAND
The only stainless steel ceiling hood model equipped with real-time air quality sensor, connected via app for superior functionality and air optimisation even in the most minimalist island kitchens.

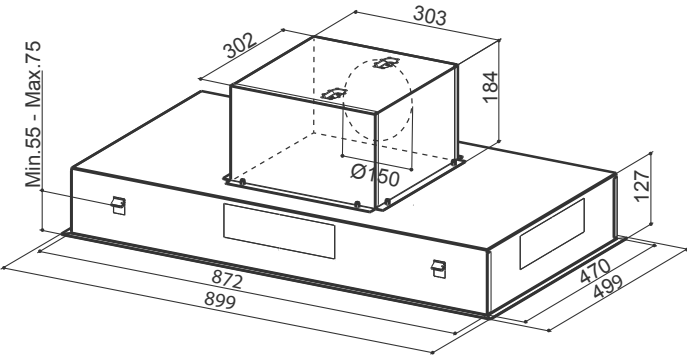

HEAVEN AIR

HEAVEN AIR X KL A90 cod. 350.0615.707



FEATURES		PERFORMANCE					ACCESSORIES
Finish		Speed	1	2	3	INT	Cod. 112.0157.240
• Stainless steel		Air capacity IEC point	290	430	610	770	F8 Charcoal filter
Controls		Pressure	460	550	590	600	Cod. 112.0327.007
Electronic Led		Input	150	200	240	250	ENERGY Remote blower kit
Lighting		Noise level	48	56	63	68	Cod. 112.0158.127
4 LED lights							FHP8 Charcoal filter High Performance
Grease filter							Cod. 112.0185.278
Cassettes dishwasher safe							FLL8 Charcoal filter Long Lasting
Ø of air outlet							
150 / 120 mm							
Width							
900 mm							
Energy class							
A							


HEAVEN LIGHT PRO



Stainless steel



White glass

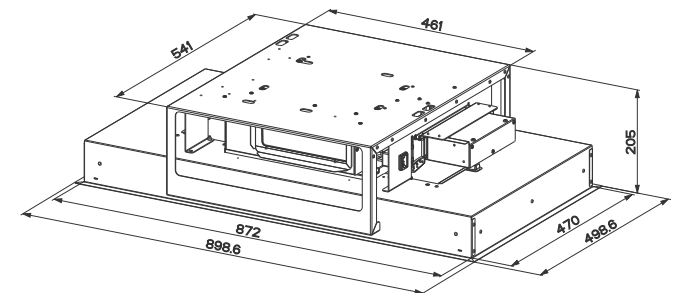


HEAVEN LIGHT PRO

HEAVEN LIGHT PRO G/WH FLAT KL A90 cod. 350.0669.936
HEAVEN LIGHT PRO X FLAT KL A90 cod. 350.0669.937



FEATURES		PERFORMANCE					ACCESSORIES
Finish	• White glass • Stainless steel	Speed	1	2	3	INT BOOST	Cod. 112.0471.608
Controls	Electronic Led	Air capacity IEC point	190	350	400	530 700	F18-90 Charcoal filter
Lighting	2 LED light	Pressure	160	480	490	500 510	
Grease filter	Cassettes dishwasher safe	Input	15	60	85	220 250	
Ø of air outlet	150 / 120 mm	Noise level	43	58	60	66 72	
Width	900 mm						
Energy class	A+						

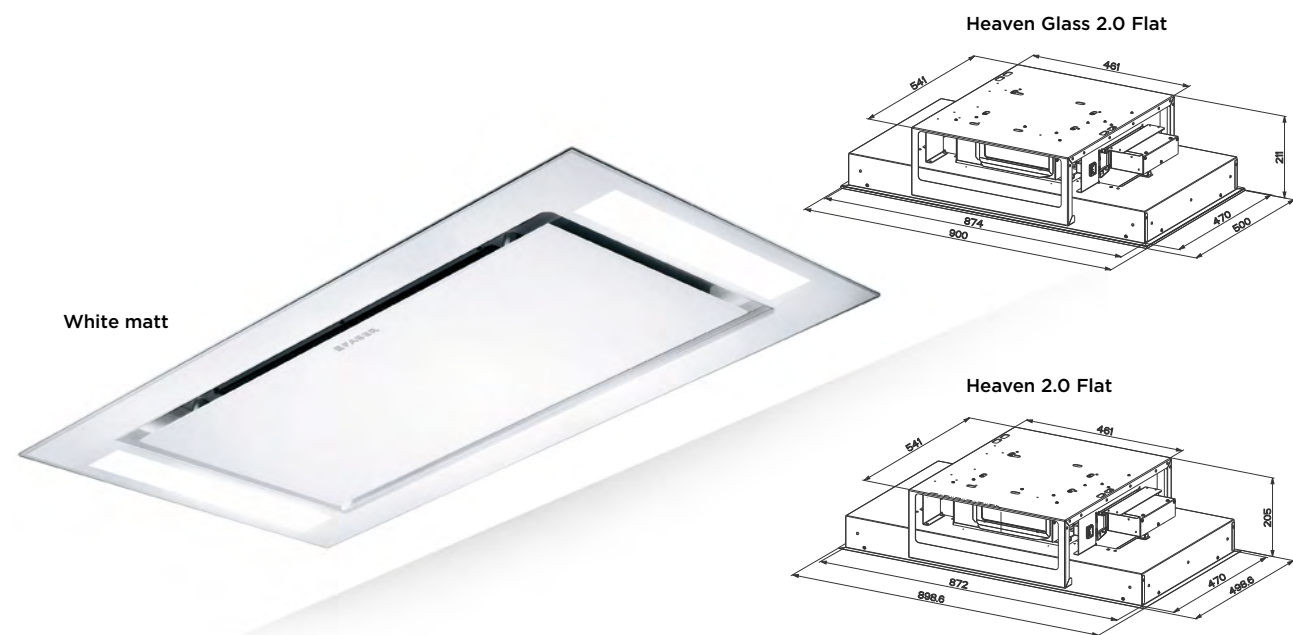

HEAVEN GLASS 2.0 FLAT

HEAVEN 2.0 FLAT

HEAVEN 2.0 BK MATT FLAT A90/2 cod. 350.0663.966

HEAVEN GLASS 2.0 WH FLAT KL A90/2 cod. 350.0663.971*
HEAVEN 2.0 X FLAT KL A90/2 cod. 350.0663.970*




FEATURES	PERFORMANCE					ACCESSORIES
Finish • White glass • Stainless steel	Speed	1	2	3	INT	Cod. 112.0471.608
Controls Electronic Led	Air capacity IEC point	165	350	490	700	FLL18-90 Charcoal filter Long Lasting
Lighting 2 LED lights 4 LED lights (s. steel model)	Pressure	40	150	320	700	
Grease filter Cassettes dishwasher safe	Input	10	30	65	145	
Ø of air outlet 220 x 90 mm	Noise level	40	58	65	72	
Width 900 mm						
Energy class A+						

Stainless steel



Air outlet adjustable in 4 positions

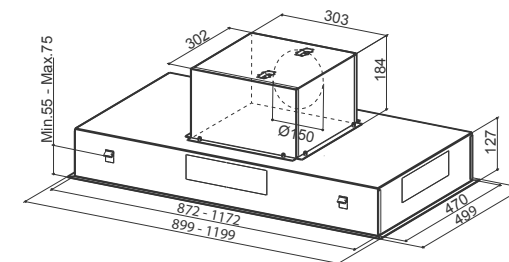

HEAVEN 2.0

HEAVEN 2.0 EV8+ X 90 cod. 110.0315.792
HEAVEN 2.0 EV8+ X 120 cod. 110.0315.794

HEAVEN 2.0 X KL A90 cod. 350.0621.950*



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel	Speed	1	2	3	INT	Cod. 112.0157.240
Controls Electronic Led	Air capacity IEC point	290	430	610	770	F8 Charcoal filter
Lighting 4 LED lights	Pressure	460	550	590	600	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Ø of air outlet 150 / 120 mm	Noise level	48	56	63	68	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Width 900 / 1200 mm						
Energy class A						


CEILING

Progress is expressed in the extremely clearcut design of a perfect hideaway structure. The innovative, minimal look make this model hood with ceiling installation a design item that hides high performance thanks to the perimeter suction technology employed. The perfect balance of function and form, where technology does its utmost to ensure comfort and practicality, with a discreet presence in the kitchen.



DOWNDRAFT

FABULA PLUS 60	311
FABULA PLUS 90	310

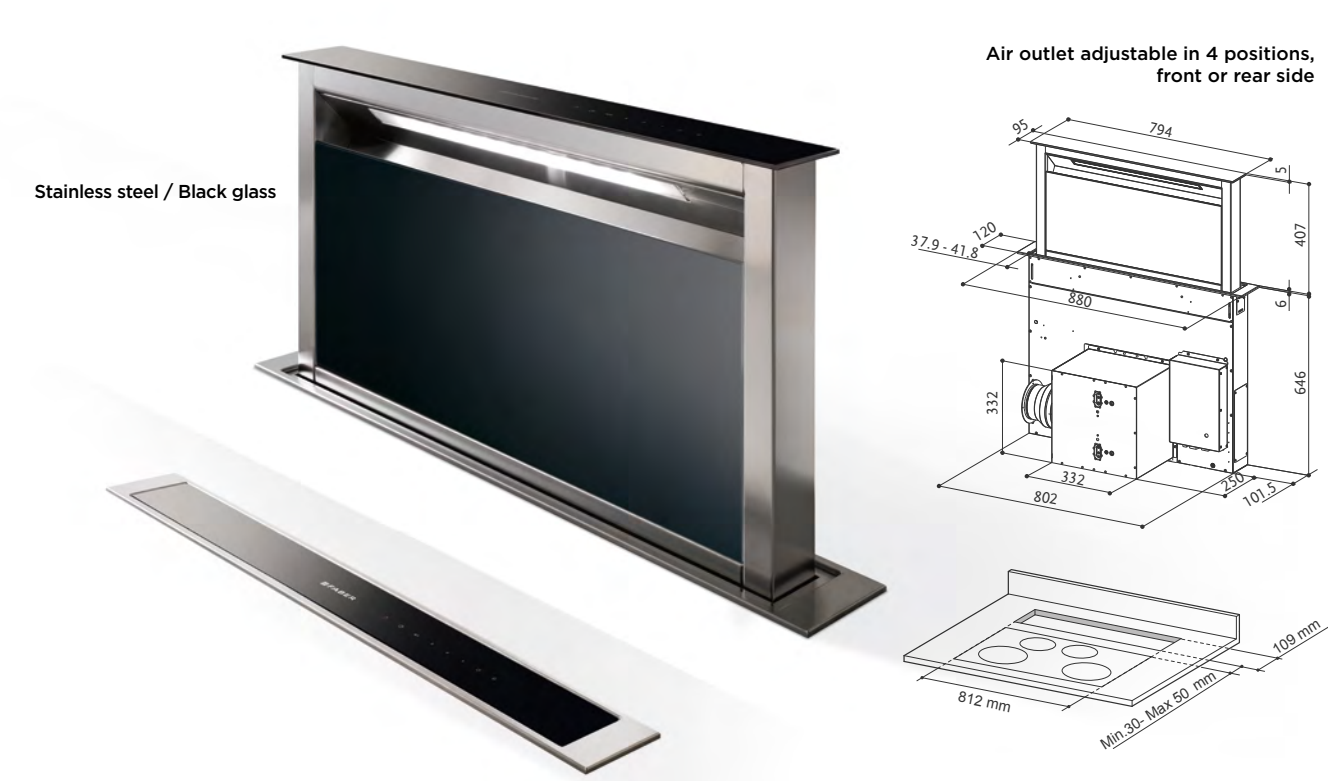


FABULA PLUS 90

FABULA PLUS EV8+ BK A90 cod. 340.0492.566
FABULA PLUS EV8+ WH A90 cod. 340.0492.567



FEATURES	PERFORMANCE						ACCESSORIES	
Finish • Stainless steel / Black glass • Stainless steel / White glass	Speed	1	2	3	4	INT	Cod. 112.0261.258	
	Air capacity IEC point	200280350440720						FLL12 Charcoal filter
Controls EVO Touch control	Pressure	100	390	490	550	560	Cod. 112.0676.782	
	Input	45	100	135	170	250	Remote control	
Lighting LED lights	Noise level	43	49	53	57	68	Cod. 112.0327.008	
							Remote blower kit Fabula	
Grease filter Cassettes dishwasher safe								
Ø of air outlet 150 / 120								
Width 900 mm								
Energy class A								

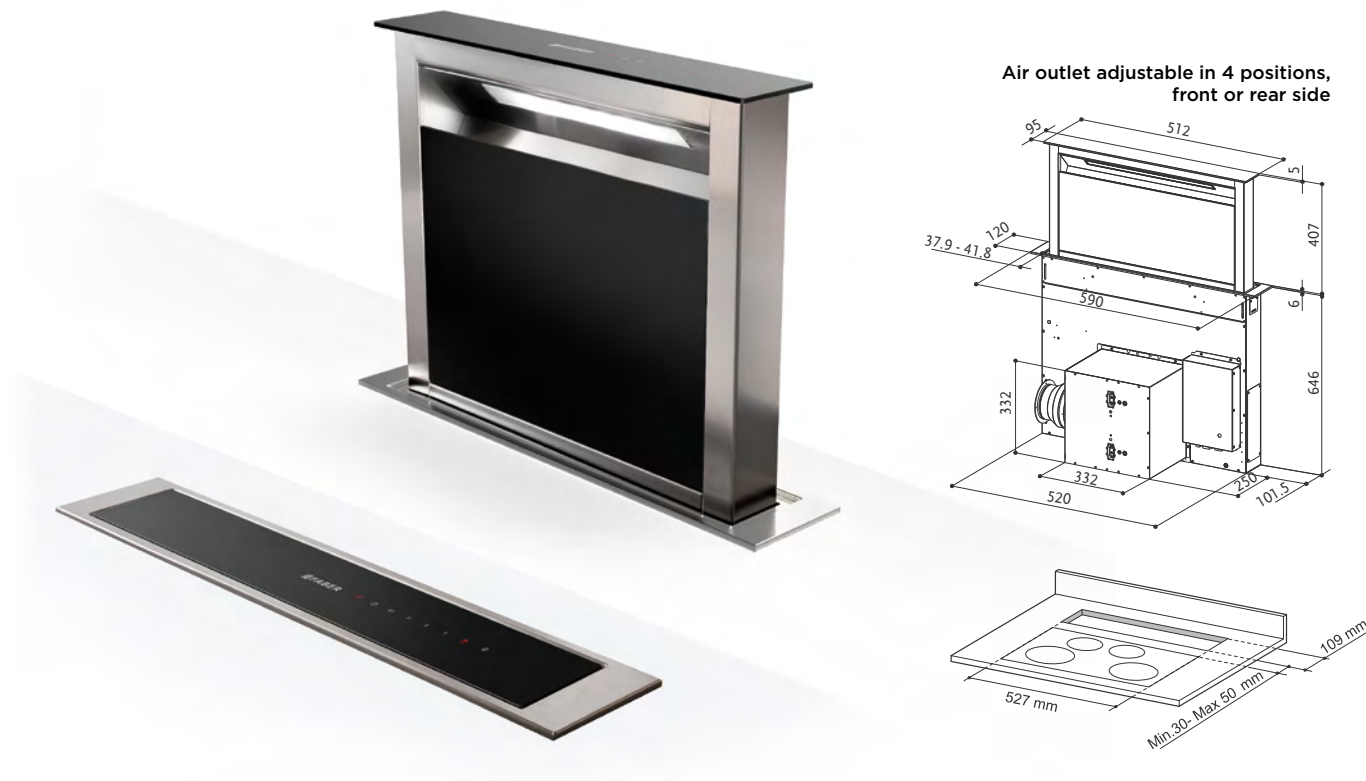

FABULA PLUS 60

FABULA PLUS EVO+BK A60 cod. 340.0582.936



FEATURES	PERFORMANCE						ACCESSORIES
Finish • Stainless steel / Black glass	Speed	1	2	3	4	INT	Cod. 112.0629.411
Controls EVO Touch control	Air capacity IEC point	200	280	350	430	650	FLL12 KIT 2 C.F. FABULA 60cm
Lighting LED lights	Pressure	100	390	490	550	560	Cod. 112.0676.782
Grease filter Cassettes dishwasher safe	Input	45	100	135	170	250	Remote control
Ø of air outlet 150 / 120	Noise level	46	52	59	62	70	Cod. 112.0327.008
Width 600 mm							Remote blower kit Fabula
Energy class B							


Discreet, rational, silent.
Built-in hoods reduce the aesthetic impact
of the hood in the kitchen and integrate
perfectly with the cupboards.
An essential tool that's invisible to the eye.

BUILT-IN

FLEXA HIP	343	INKA LUX PREMIUM	336
IN-LIGHT	335	INKA PLUS HC	338
IN-NOVA AIR	325	INKA SMART C	341
IN-NOVA COMFORT	332	INKA SMART HC	340
IN-NOVA PREMIUM	329	INKA SMART HCS (ICH)	339
IN-NOVA SMART	333	MAXIMA TOUCH	342
IN-NOVA TOUCH	327	ULTRA SLIM	331
IN-NOVA ZERO DRIP	321	106/35 PLUS	346
IN-NOVA ZERO DRIP EXTREME	317	152	345
IN-NOVA ZERO DRIP LITE	323	2156 - 2152	344
IN-NOVA ZERO DRIP PLUS	319	2740	347
INKA LUX	337		

IN-NOVA ZERO DRIP EXTREME



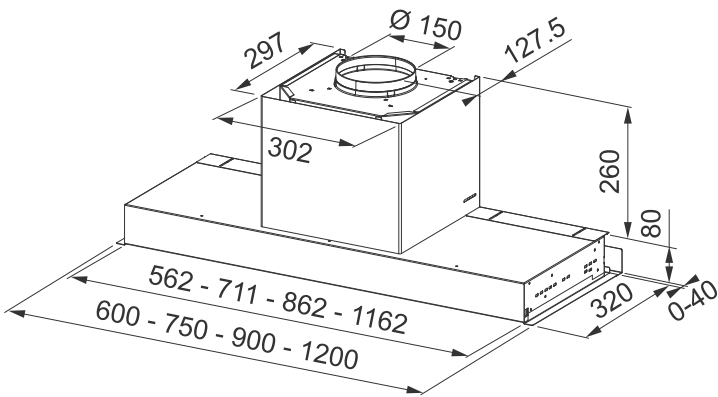


NEW

IN-NOVA ZERO DRIP EXTREME

IN-NOVA ZERO DRIP EXTREME A60 cod. 305.0730.780
IN-NOVA ZERO DRIP EXTREME A75 cod. 305.0730.803
IN-NOVA ZERO DRIP EXTREME A90 cod. 305.0730.808
IN-NOVA ZERO DRIP EXTREME A120 cod. 305.0730.804

IN-NOVA ZERO DRIP EXTREME BK MATT A60 cod. 305.0736.208
IN-NOVA ZERO DRIP EXTREME BK MATT A75 cod. 305.0736.209
IN-NOVA ZERO DRIP EXTREME BK MATT A90 cod. 305.0736.211
IN-NOVA ZERO DRIP EXTREME BK MATT A120 cod. 305.0736.210




THE EXCLUSIVE PATENTED FABER SYSTEM DESIGNED TO COMBAT CONDENSATION. A 180° OPENING VISOR, EQUIPPED WITH TWO MICRO-VENTILATORS, CREATES AN ADDITIONAL AIRFLOW, PROVIDING EFFECTIVE PROTECTION OF YOUR KITCHEN SURFACES AND FURNITURE FROM MOISTURE AND CONDENSATION DAMAGE.



Thanks to its intuitive mechanism, the water collection tank can be easily emptied of condensation droplets collected by the special inclined filters.

FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / White Glass • Black matt	Speed	1	2	3	INT	Cod. 112.0627.248
	Air capacity IEC point	280	410	580	710	FLL26 Charcoal filter
Controls Squarcle touch	Pressure	450	510	550	560	Cod. 112.0676.782
Lighting LED light bar	Input	150	200	240	250	Remote control
Grease filter Cassettes dishwasher safe	Noise level	49	58	65	69	
Ø of air outlet 150 / 120 mm						
Width 600 / 750 / 900 / 1200 mm						
Energy class A						

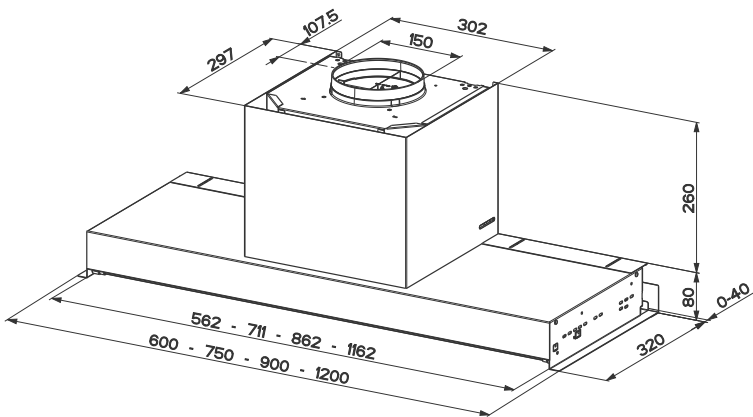

IN-NOVA ZERO DRIP PLUS

IN-NOVA ZERO DRIP PLUS A60 cod. 305.0711.744
IN-NOVA ZERO DRIP PLUS A75 cod. 305.0711.741

IN-NOVA ZERO DRIP PLUS A90 cod. 305.0711.742
IN-NOVA ZERO DRIP PLUS A120 cod. 305.0711.743

ZERO DRIP PLUS

SOUND PRO

INTENSIVE SPEED

FILTER ALARM

REMOTE CONTROL
(optional)


LED LIGHT

FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / White Glass	Speed	1	2	3	INT	Cod. 112.0627.248
Controls Squarcle touch	Air capacity IEC point	280	410	580	710	FLL26 Charcoal filter
Lighting LED light bar	Pressure	450	510	550	560	Cod. 112.0676.782
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Remote control
Ø of air outlet 150 / 120 mm	Noise level	49	58	65	69	
Width 600 / 750 / 900 / 1200 mm						
Energy class A						



Thanks to its intuitive mechanism, the water collection tray can easily be removed with just one hand.

The glass visor gets heated thanks to the thermal-resistance system.

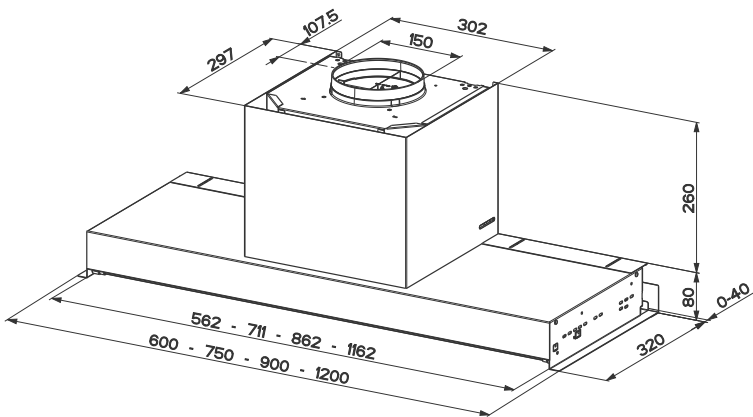

IN-NOVA ZERO DRIP

IN-NOVA ZERO DRIP A60 cod. 305.0626.490
IN-NOVA ZERO DRIP A75 cod. 305.0654.379

IN-NOVA ZERO DRIP A90 cod. 305.0626.489
IN-NOVA ZERO DRIP A120 cod. 305.0626.531


IN-NOVA ZERO DRIP KL A60 cod. 305.0672.371 *
IN-NOVA ZERO DRIP KL A90 cod. 305.0672.330 *



Thanks to its intuitive mechanism, the water collection tray can easily be removed with just one hand.




FEATURES	PERFORMANCE	ACCESSORIES
Finish • Stainless steel / White Glass	Speed 1 2 3 INT	Cod. 112.0627.248
Controls Squarcle touch	Air capacity IEC point 280 410 580 710	FLL26 Charcoal filter
Lighting 2 LED lights	Pressure 450 510 550 560	Cod. 112.0676.782
Grease filter Cassettes dishwasher safe	Input 150 200 240 250	Remote control
Ø of air outlet 150 / 120 mm	Noise level 49 58 65 69	
Width 600 / 750 / 900 / 1200 mm		
Energy class A		

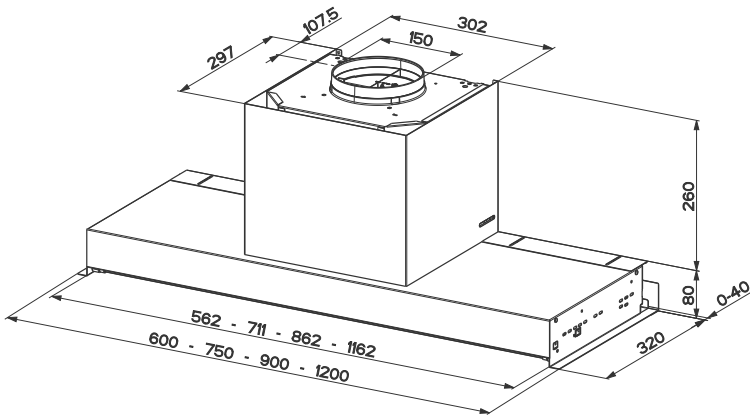

IN-NOVA ZERO DRIP LITE

IN-NOVA ZERO DRIP LITE A60 cod. 305.0703.267
IN-NOVA ZERO DRIP LITE A75 cod. 305.0703.268
IN-NOVA ZERO DRIP LITE A90 cod. 305.0703.270
IN-NOVA ZERO DRIP LITE A120 cod. 305.0703.269


IN-NOVA ZERO DRIP LITE A60 BK cod. 305.0704.149
IN-NOVA ZERO DRIP LITE A90 BK cod. 305.0704.150
IN-NOVA ZERO DRIP LITE A120 BK cod. 305.0720.621



FEATURES	PERFORMANCE	ACCESSORIES
Finish • Stainless steel / White Glass • Black Stainless steel / Black Glass	Speed 1 2 3 INT	Cod. 112.0627.248
Controls Electronic push button	Air capacity IEC point 290 440 570 670	FLL26 Charcoal filter
Lighting 2 LED lights	Pressure 360 460 500 550	Cod. 112.0676.782
Grease filter Cassettes dishwasher safe	Input 130 165 210 250	Remote control
Ø of air outlet 150 / 120 mm	Noise level 52 60 65 68	
Width 600 / 750 / 900 / 1200 mm Black version 600 / 900 / 1200 mm		
Energy class B		




The slope-free tray accommodates large quantities of liquids and is easy to remove and empty thanks to its release valve.


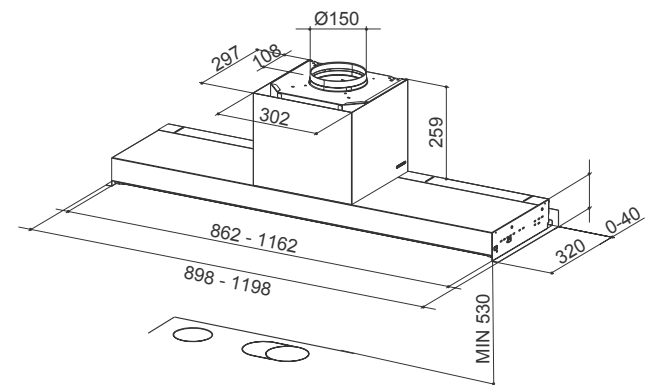


IN-NOVA AIR

IN-NOVA AIR X KL A90 cod. 305.0615.688
IN-NOVA AIR X KL A120 cod. 305.0615.701



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / Black Glass	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Squarcle touch	Air capacity IEC point	250	390	570	670	Cod. 112.0676.782 Remote control
Lighting 2 LED lights	Pressure	450	540	570	580	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm	Noise level	53	60	67	69	
Width 900 / 1200 mm						
Energy class A						

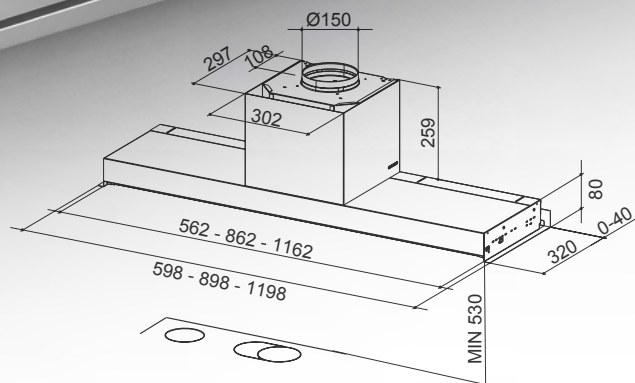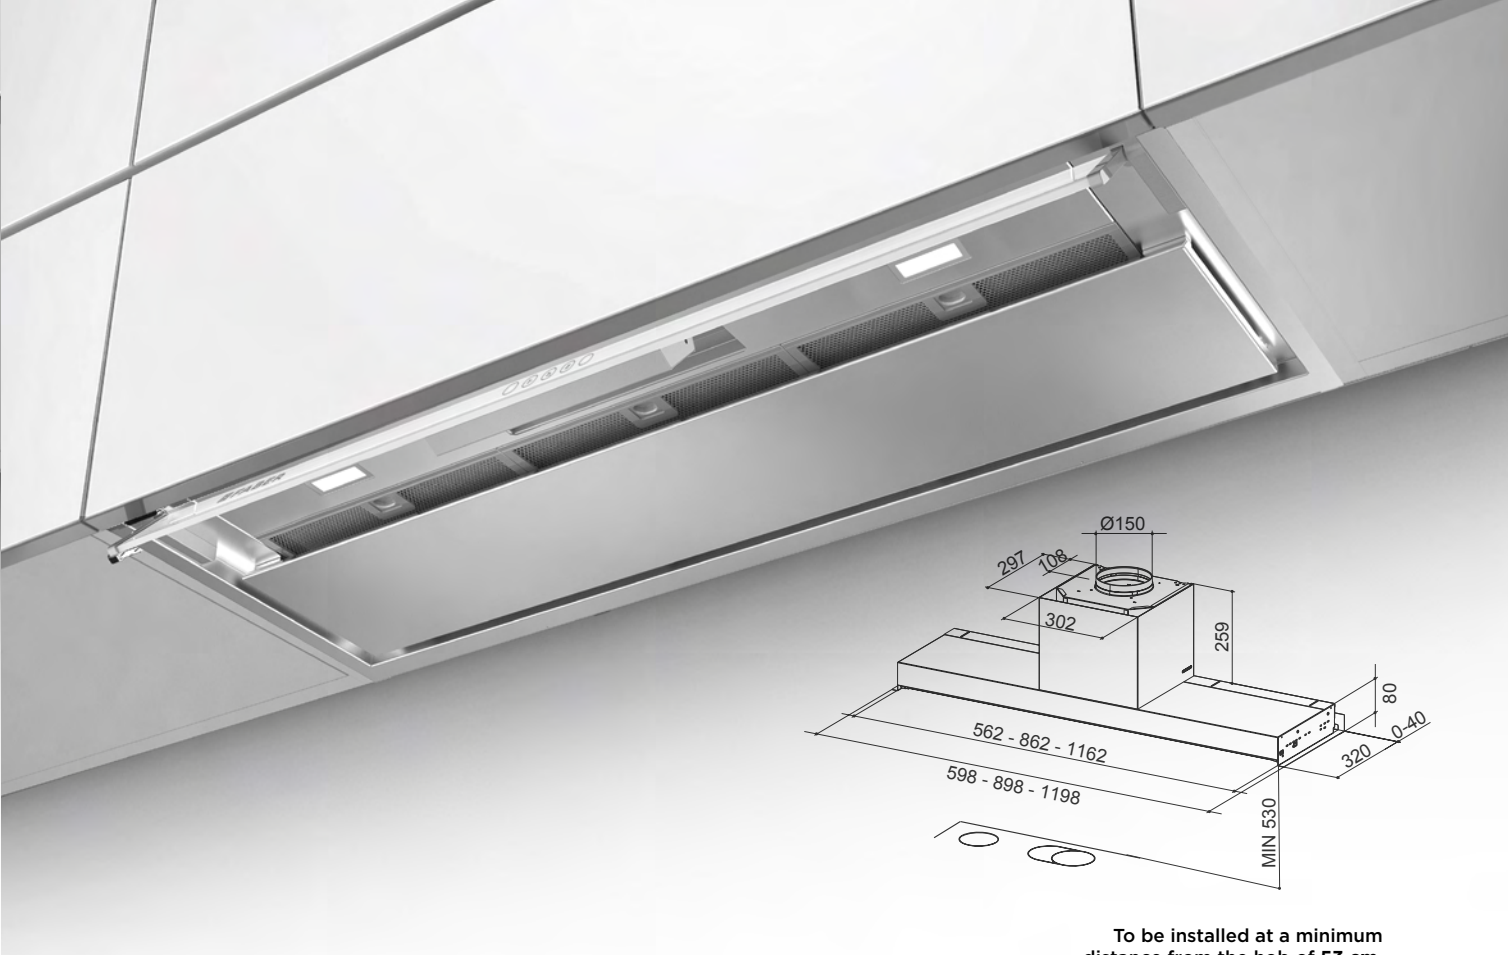

To be installed at a minimum distance from the hob of 53 cm.

IN-NOVA TOUCH

IN-NOVA TOUCH X/BK A60 cod. 305.0611.152
IN-NOVA TOUCH X/BK A90 cod. 305.0611.153
IN-NOVA TOUCH X/BK A120 cod. 305.0611.154

IN-NOVA TOUCH X/WH A60 cod. 305.0611.157
IN-NOVA TOUCH X/WH A90 cod. 305.0611.156
IN-NOVA TOUCH X/WH A120 cod. 305.0611.155



SOUND PRO



REMOTE BLOWER
(optional)



PERIMETER ASPIRATION



INTENSIVE SPEED



FILTER ALARM




REMOTE CONTROL
(optional)




LED LIGHT



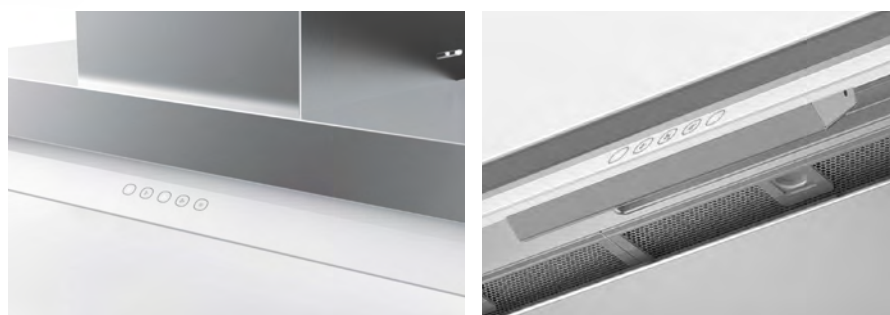

Faber's touch controls are located at the front of the hood for instant access.

FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / Black glass • Stainless steel / White Glass	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Squarcle touch	Air capacity IEC point	250	390	570	670	Cod. 112.0676.782 Remote control
Lighting 2 LED lights	Pressure	450	540	570	580	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm	Noise level	53	60	67	69	Cod. 112.0624.485 Kit filters stainless steel In-Nova 60
Width 600 / 900 / 1200 mm						Cod. 122.0624.486 Kit filters stainless steel In-Nova 90
Energy class A						Cod. 112.0624.487 Kit filters stainless steel In-Nova 120

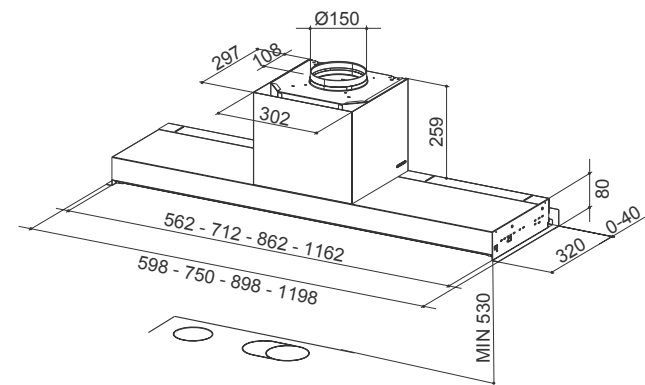

To be installed at a minimum distance from the hob of 53 cm.

IN-NOVA PREMIUM

IN-NOVA PREMIUM WH M A60 cod. 305.0625.312
IN-NOVA PREMIUM WH M A90 cod. 305.0625.311
IN-NOVA PREMIUM WH M A120 cod. 305.0625.240
IN-NOVA PREMIUM BK M A60 cod. 305.0625.239
IN-NOVA PREMIUM BK M A90 cod. 305.0625.238
IN-NOVA PREMIUM BK M A120 cod. 305.0625.237

IN-NOVA PREMIUM EV8+ X A60 cod. 110.0439.940
IN-NOVA PREMIUM EV8+ X A75 cod. 305.0569.170
IN-NOVA PREMIUM EV8+ X A90 cod. 110.0439.951
IN-NOVA PREMIUM EV8+ X A120 cod. 110.0439.952

IN-NOVA PREMIUM X KL A60 cod. 305.0621.943 *
IN-NOVA PREMIUM X KL A90 cod. 305.0621.942 *
IN-NOVA PREMIUM X KL A120 cod. 305.0621.941 *




White



Black



FEATURES	PERFORMANCE					ACCESSORIES
Finish • Stainless steel / Glass • White matt / Glass • Black matt / Glass	Speed	1	2	3	INT	Cod. 112.0157.243 F9 Charcoal filter
Controls Electronic SENSOR	Air capacity IEC point	250	390	570	670	Cod. 112.0676.782 Remote control
Lighting 2 LED lights	Pressure	450	540	570	580	Cod. 112.0327.007 ENERGY Remote blower kit
Grease filter Cassettes dishwasher safe	Input	150	200	240	250	Cod. 112.0185.276 FLL9 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm	Noise level	53	60	67	69	Cod. 112.0624.485 Kit filters stainless steel In-Nova 60
Width 600 / 750 / 900 / 1200 mm						Cod. 122.0624.486 Kit filters stainless steel In-Nova 90
Energy class A						Cod. 112.0624.487 Kit filters stainless steel In-Nova 120

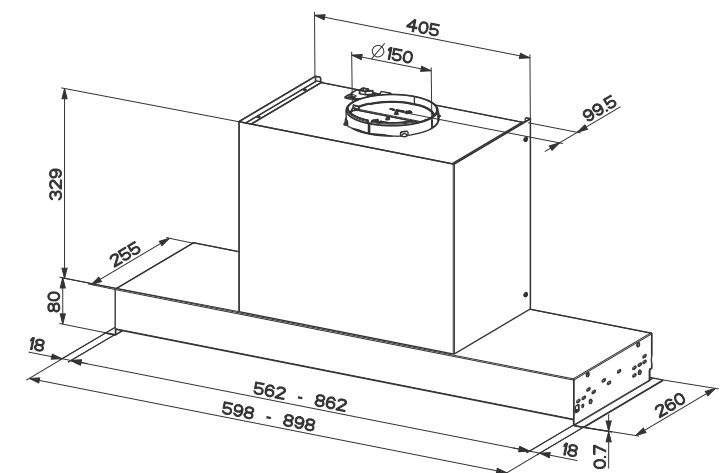



To be installed at a minimum distance from the hob of 53 cm.

ULTRA SLIM

ULTRA SLIM X KL A60 cod. 305.0655.735
ULTRA SLIM X KL A90 cod. 305.0655.737



FEATURES	PERFORMANCE					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.240
• Stainless steel	Air capacity IEC point	320	480	640	750	F8 Charcoal filter
Controls	Pressure	390	470	530	540	Cod. 112.0676.782
Electronic SENSOR	Input	130	165	210	250	Remote control
Lighting	Noise level	48	57	64	67	Cod. 112.0158.127
2 LED lights						FHP8 Charcoal filter High Performance
Grease filter						Cod. 112.0185.278
Cassettes dishwasher safe						FLL8 Charcoal filter Long Lasting
Ø of air outlet						
150 / 120 mm						
Width						
600 / 900 mm						
Energy class						
B						

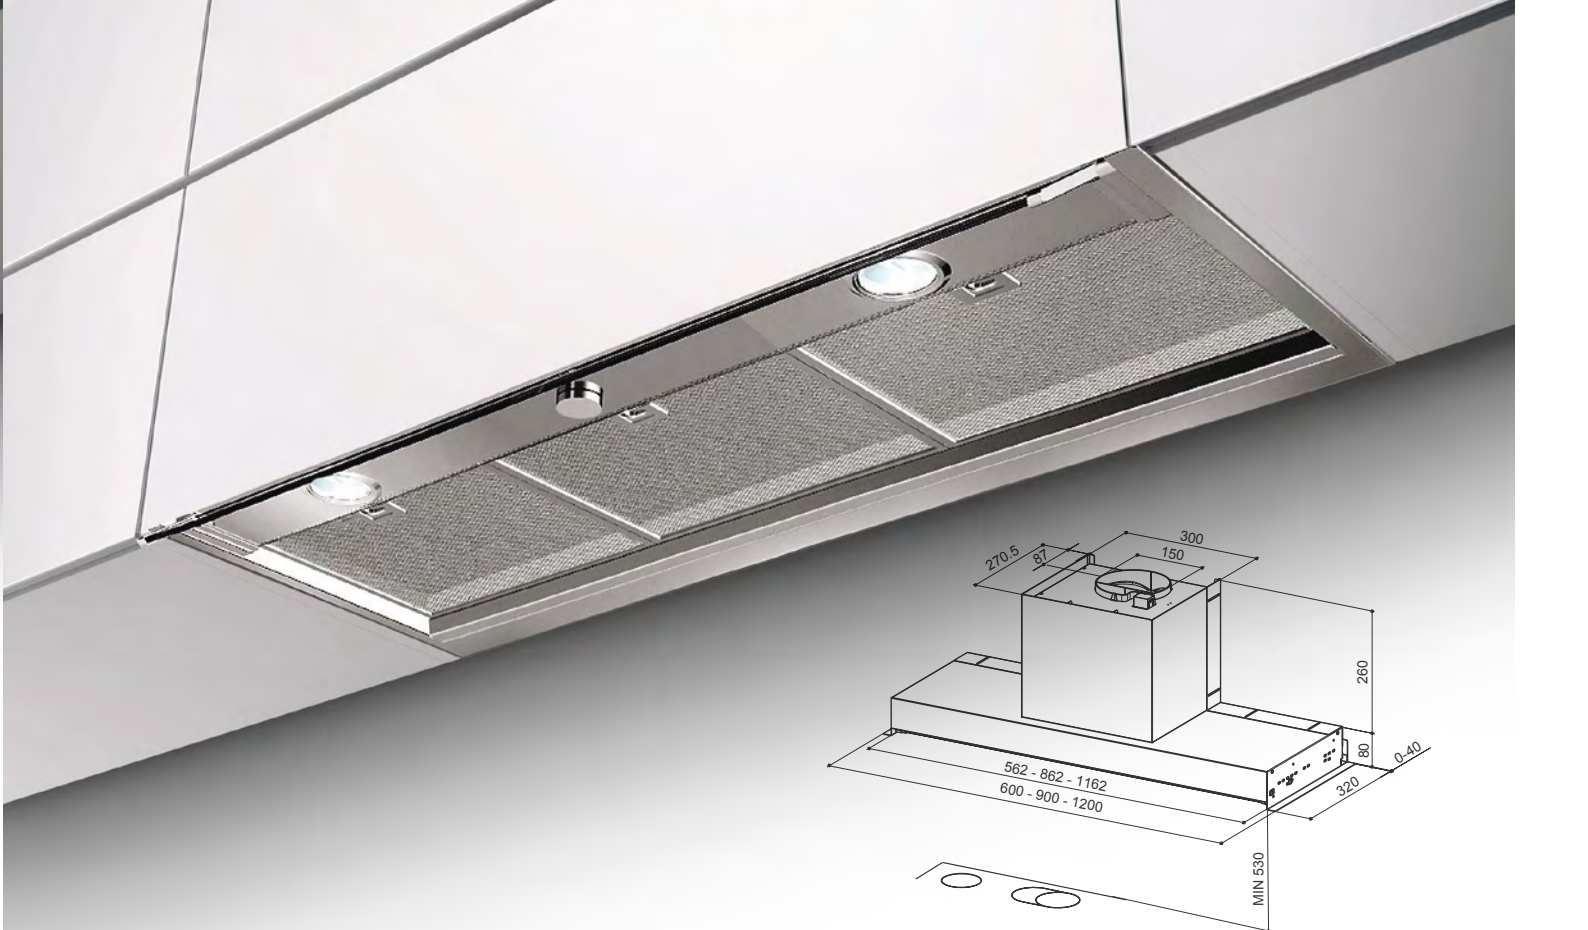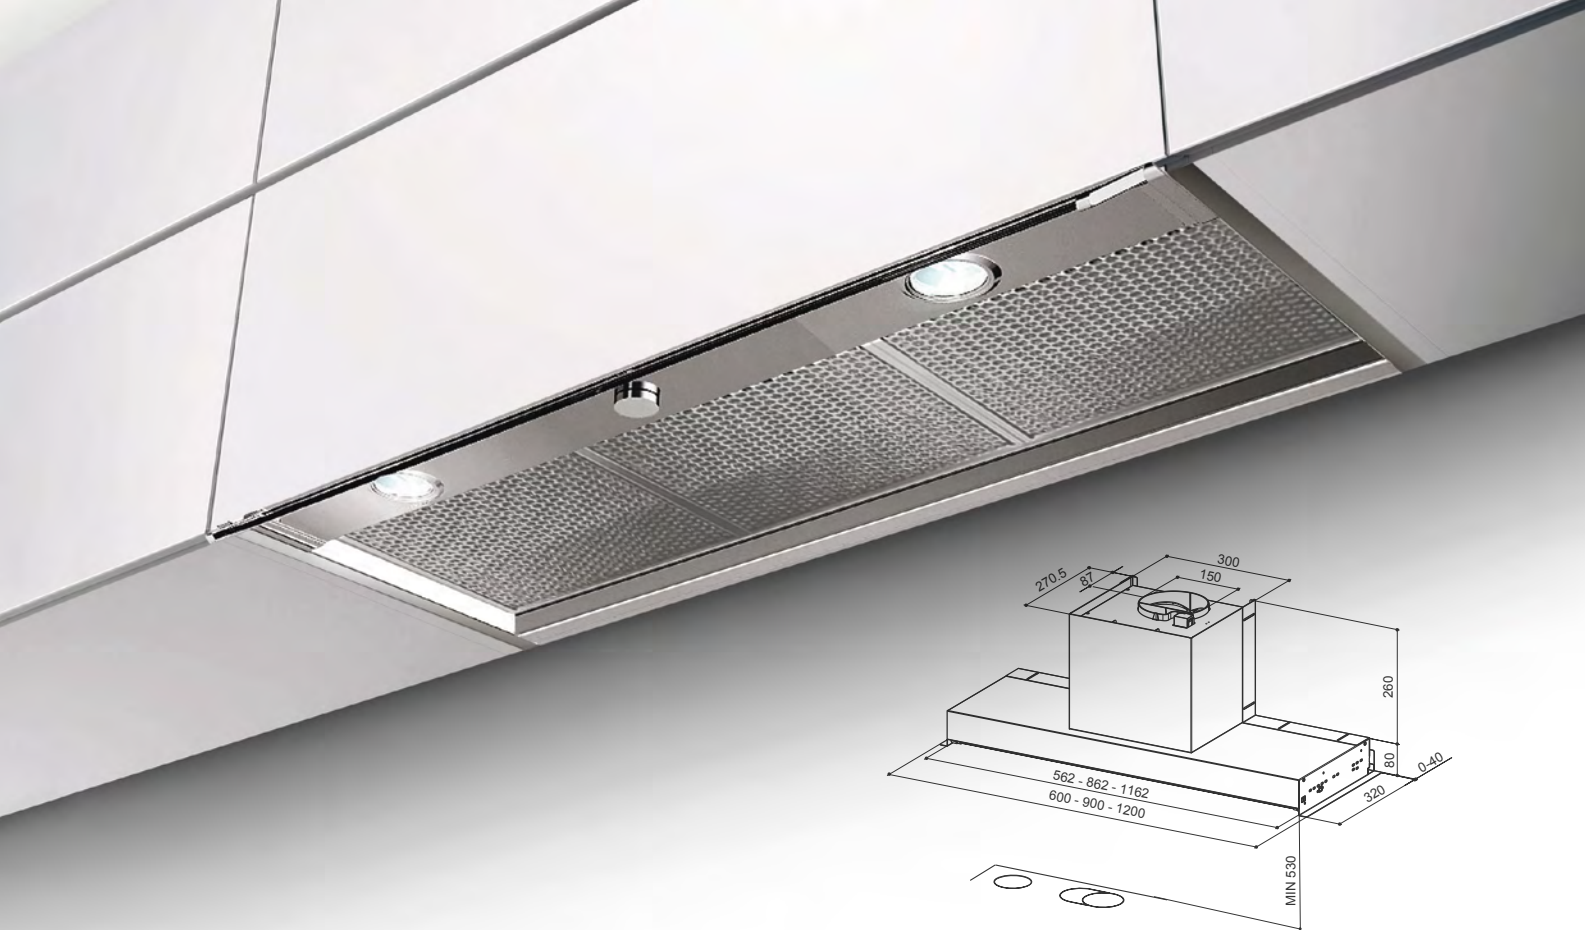

IN-NOVA COMFORT

To be installed at a minimum distance from the hob of 53 cm.

IN-NOVA COMFORT EG6 X A60 cod. 110.0439.937
IN-NOVA COMFORT EG6 X A90 cod. 110.0439.938
IN-NOVA COMFORT EG6 X A120 cod. 110.0439.939



FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0441.093
• Stainless steel	Air capacity IEC point	250 380 570			F4-14B Charcoal filter
Controls	Pressure	230 370 500			Cod. 112.0327.007
Pull out Knob	Input	80 105 160			ENERGY Remote blower kit
Lighting	Noise level	47 56 65			
2 LED lights					
Grease filter					
Stainless steel cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
600 / 900 / 1200 mm					
Energy class					
C					


IN-NOVA SMART

To be installed at a minimum distance from the hob of 53 cm.

IN-NOVA SMART X A60 cod. 305.0557.680
IN-NOVA SMART X A90 cod. 305.0557.691
IN-NOVA SMART X A120 cod. 305.0554.567



FEATURES	PERFORMANCE				ACCESSORIES
Finish	Speed	1	2	3	Cod. 112.0067.944
• Stainless steel	Air capacity IEC point	200 260 360			F3 Charcoal filter
Controls	Pressure	220 270 290			Cod. 112.0544.470
Pull out Knob	Input	90 115 145			FLL3 Charcoal filter
Lighting	Noise level	57 62 68			Long Lasting
2 LED lights					
Grease filter					
Stainless steel cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
600 / 900 / 1200 mm					
Energy class					
D					

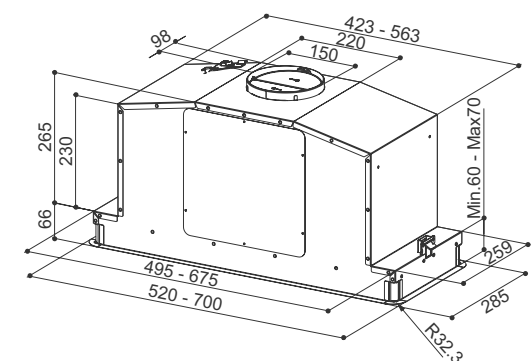

To be installed at a minimum distance from the hob of 50 cm.


IN-LIGHT

IN-LIGHT EV8+ X KL A52 cod. 110.0456.213
IN-LIGHT EV8+ X KL A70 cod. 110.0456.215

IN-LIGHT EV8+ WH MATT KL A52 cod. 110.0456.216
IN-LIGHT EV8+ WH MATT KL A70 cod. 110.0456.218



FEATURES		PERFORMANCE					ACCESSORIES
Finish • Stainless steel • White matt		Speed	1	2	3	INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Electronic Led		Air capacity IEC point	260	390	560	710	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Lighting Perimeter LED light		Pressure	450	510	550	560	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Grease filter Cassettes dishwasher safe		Input	150	200	240	250	
Ø of air outlet 150 / 120 mm		Noise level	54	58	64	69	
Width 520 / 700 mm							
Energy class A							

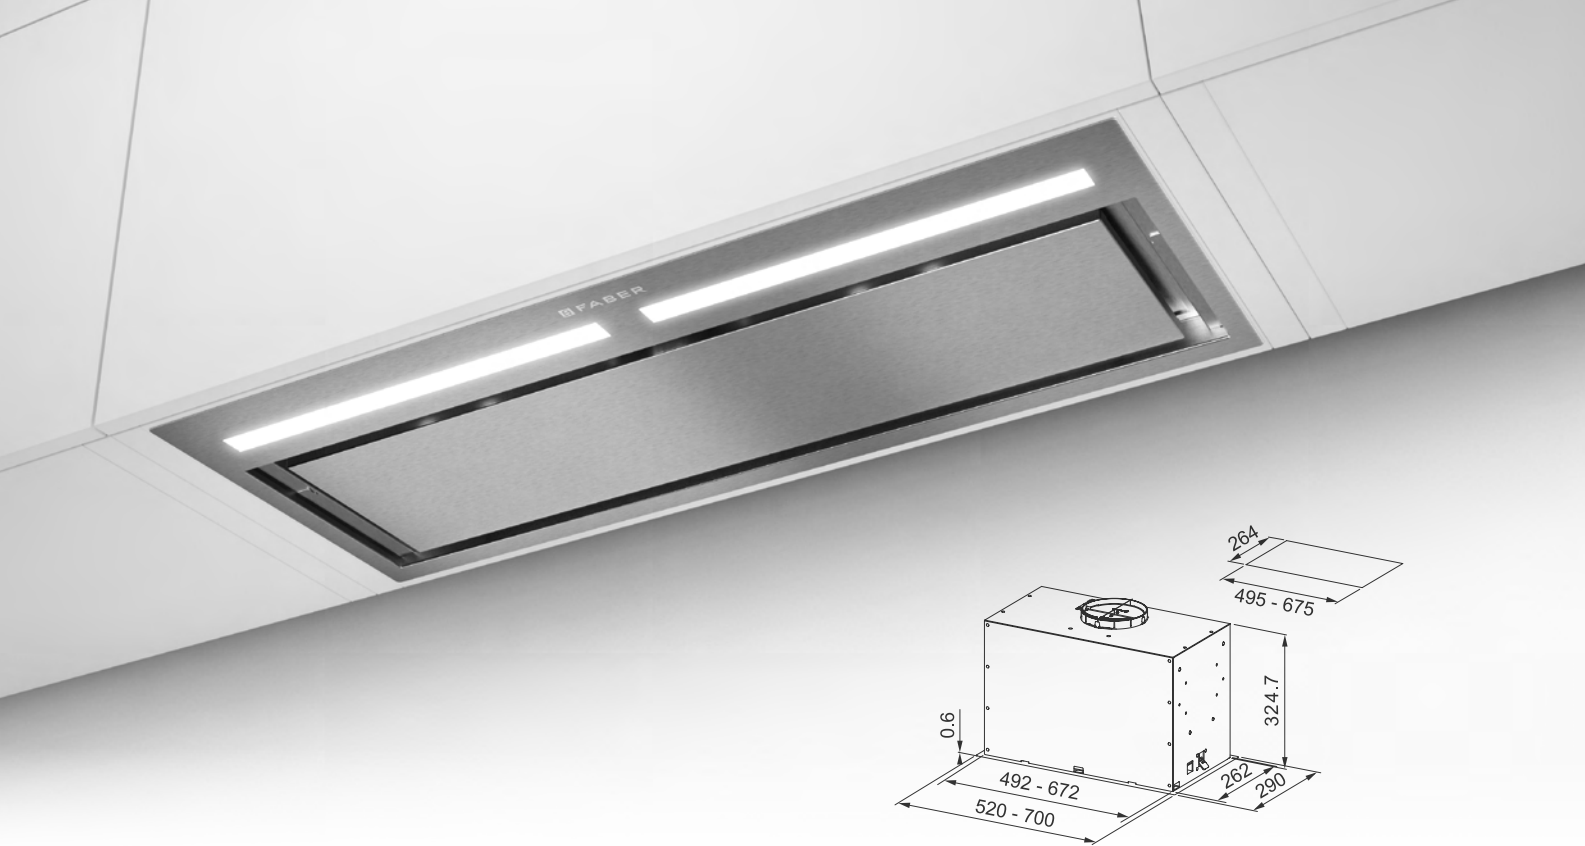


To be installed at a minimum distance from the hob of 53 cm.

INKA LUX PREMIUM

INKA LUX PREMIUM BK MATT A52 KL cod. 305.0658.608
INKA LUX PREMIUM BK MATT A70 KL cod. 305.0658.609

INKA LUX PREMIUM X A52 KL cod. 305.0658.601
INKA LUX PREMIUM X A70 KL cod. 305.0658.607



PREMIUM 520 mm					PREMIUM 700 mm						
FEATURES	PERFORMANCE				PERFORMANCE				ACCESSORIES		
Finish	Speed	1	2	3	INT	Speed	1	2	3	INT	Cod. 112.0157.240
• Stainless steel • Black matt	Air capacity IEC point	260	410	580	670	Air capacity IEC point	290	420	610	720	F8 Charcoal filter
Controls	Pressure	450	540	580	590	Pressure	460	550	590	600	Cod. 112.0327.007
Electronic	Input	150	200	240	250	Input	150	200	240	250	ENERGY Remote blower kit
Lighting	Noise level	54	59	66	69	Noise level	47	56	64	68	Cod. 112.0158.127
LED lights											FHP8 Charcoal filter High Performance
Grease filter											Cod. 112.0185.278
Cassettes dishwasher safe											FLL8 Charcoal filter Long Lasting
Ø of air outlet											
150 / 120 mm											
Width											
520 / 700 mm											
Energy class											
A (PREMIUM 700 mm) B											



To be installed at a minimum distance from the hob of 65 cm.


INKA LUX

INKA LUX EVO WH MATT A52 cod. 305.0665.357
INKA LUX EVO WH MATT A70 cod. 305.0665.358
INKA LUX EVO BK MATT A52 cod. 305.0665.355
INKA LUX EVO BK MATT A70 cod. 305.0665.356

INKA LUX EVO X A52 cod. 305.0665.353
INKA LUX EVO X A70 cod. 305.0665.354




520 mm					700 mm						
FEATURES	PERFORMANCE				PERFORMANCE				ACCESSORIES		
Finish	Speed	1	2	3	INT	Speed	1	2	3	INT	Cod. 112.0157.240
• Stainless steel • White matt • Black matt	Air capacity IEC point	280	430	550	620	Air capacity IEC point	290	450	580	670	F8 Charcoal filter
Controls	Pressure	390	470	530	540	Pressure	390	470	530	540	Cod. 112.0327.007
Electronic	Input	130	165	210	240	Input	130	165	210	250	ENERGY Remote blower kit
Lighting	Noise level	47	57	64	67	Noise level	47	57	65	66	Cod. 112.0158.127
LED ligh											FHP8 Charcoal filter High Performance
Grease filter											Cod. 112.0185.278
Cassettes dishwasher safe											FLL8 Charcoal filter Long Lasting
Ø of air outlet											
150 / 120 mm											
Width											
520 / 700 mm											
Energy class											
B											

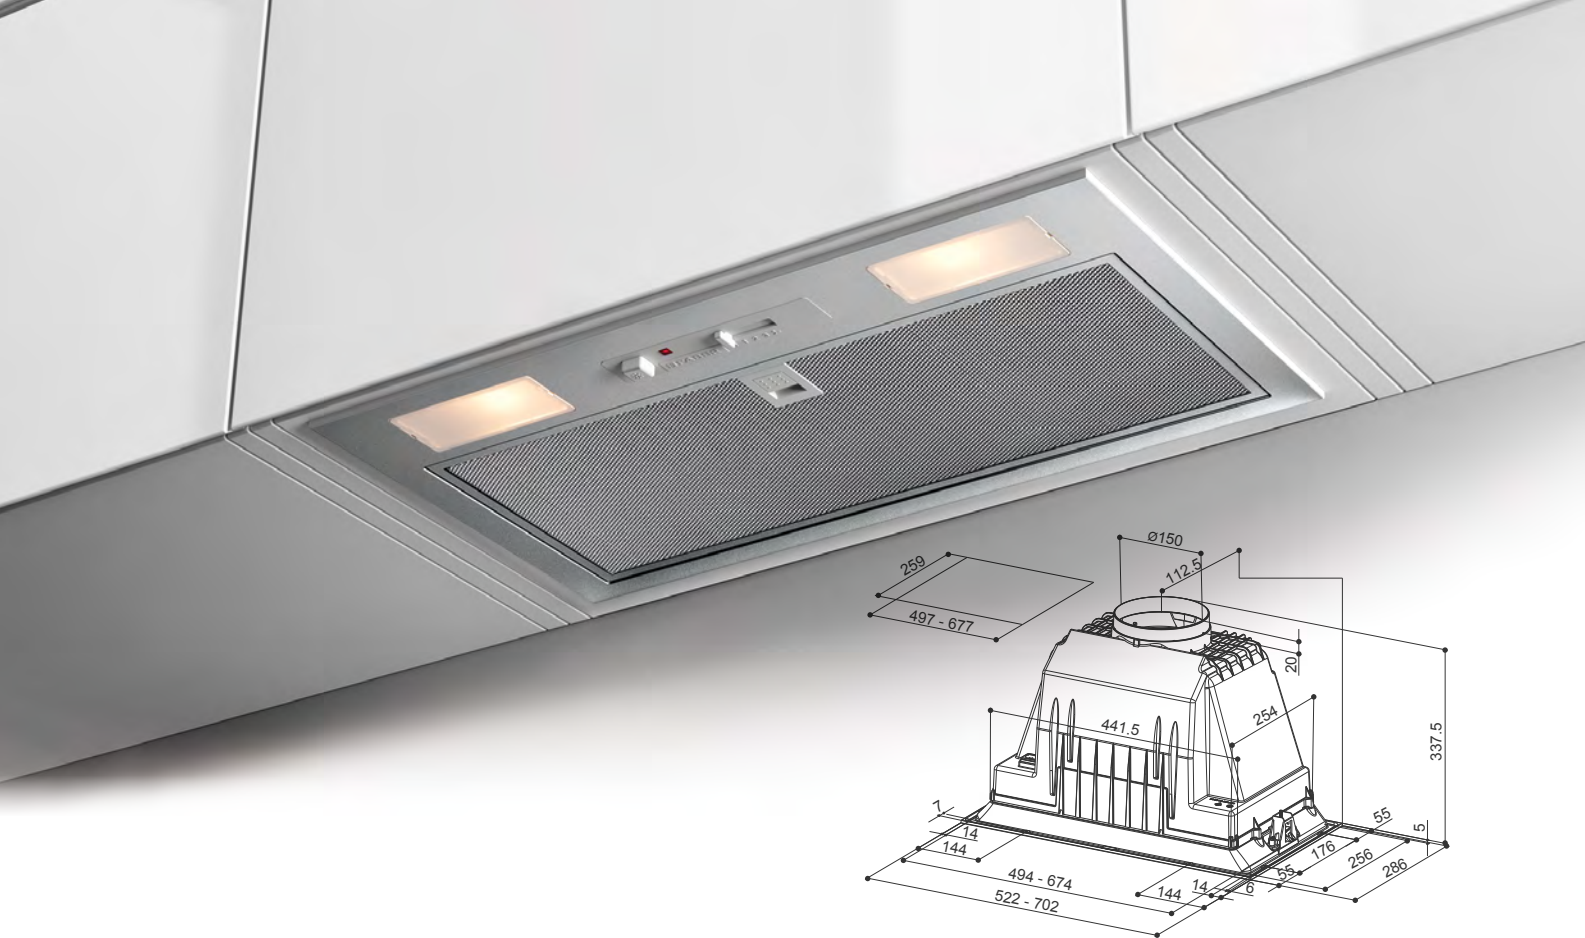


To be installed at a minimum distance from the hob of 65 cm.

INKA PLUS HC

INKA PLUS HC X A52 cod. 305.0602.047
INKA PLUS HC X A70 cod. 305.0602.048



FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0157.240
• Stainless steel	Air capacity IEC point	230 350 570			F8 Charcoal filter
Controls	Pressure	230 420 530			Cod. 112.0158.127
Electromechanical	Input	85 105 140			FHP8 Charcoal filter High Performance
Lighting	Noise level	45 53 62			Cod. 112.0185.278
2 LED lights					FLL8 Charcoal filter Long Lasting
Grease filter					
Cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
520 / 700 mm					
Energy class					
B					

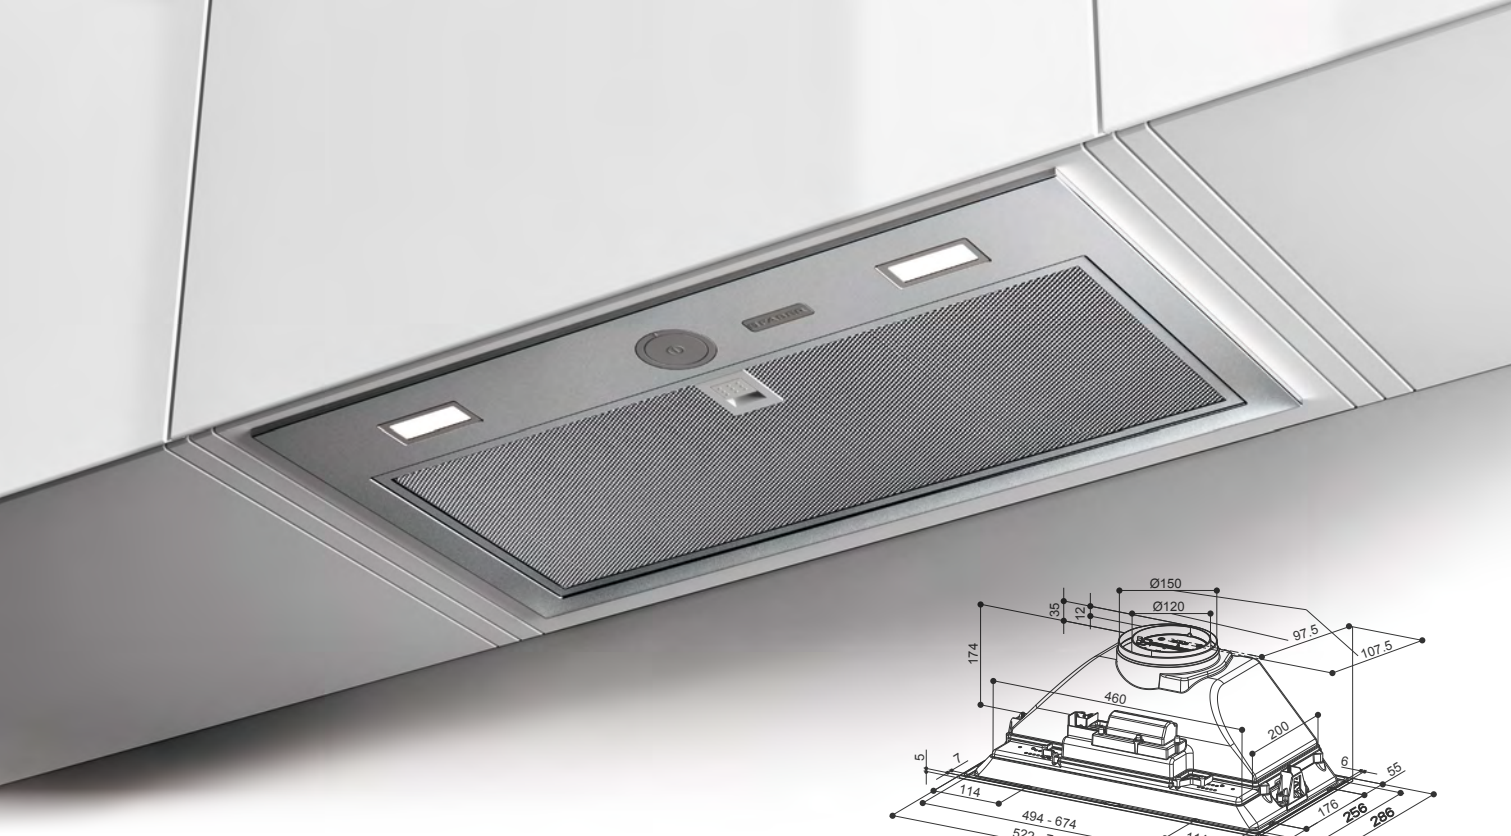

To be installed at a minimum distance from the hob of 65 cm.



INKA SMART HCS (ICH)

INKA ICH SS A52 (I.SMART HCS) cod. 305.0599.323
INKA ICH SS A70 (I.SMART HCS) cod. 305.0599.321



FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0556.527
• Stainless steel	Air capacity IEC point	180	270	390	F23 Charcoal filter
Controls	Pressure	220	240	260	Cod. 112.0556.528
Electromechanical	Input	80	90	110	FLL23 Charcoal filter Long Lasting
Lighting	Noise level	54	62	70	
2 LED lights					
Grease filter					
Cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
520 / 700 mm					
Energy class					
B					



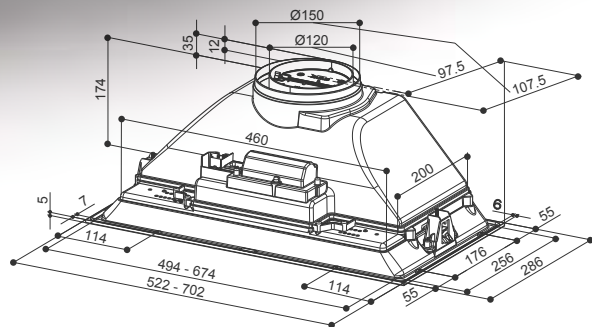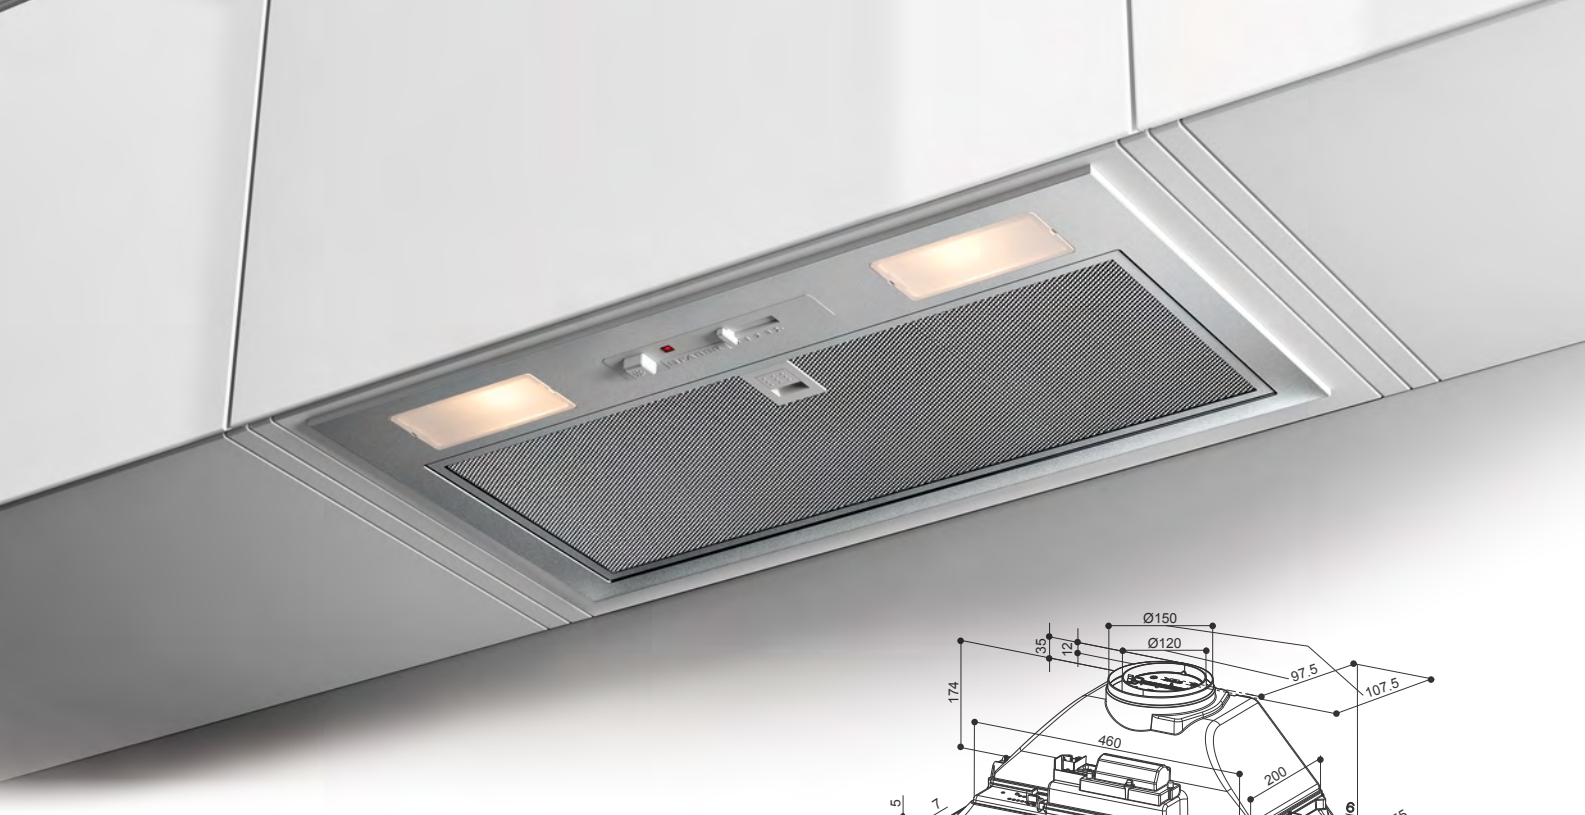

To be installed at a minimum distance from the hob of 65 cm.

INKA SMART HC


INKA SMART HC X A52 cod. 305.0599.307
INKA SMART HC X A70 cod. 305.0599.308



LED LIGHT



FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0556.527
• Stainless steel	Air capacity IEC point	180	270	390	F23 Charcoal filter
Controls	Pressure	220	240	260	Cod. 112.0556.528
Electromechanical	Input	80	90	110	FLL23 Charcoal filter Long Lasting
Lighting	Noise level	54	62	70	
2 LED lights					
Grease filter					
Cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
520 / 700 mm					
Energy class					
B					

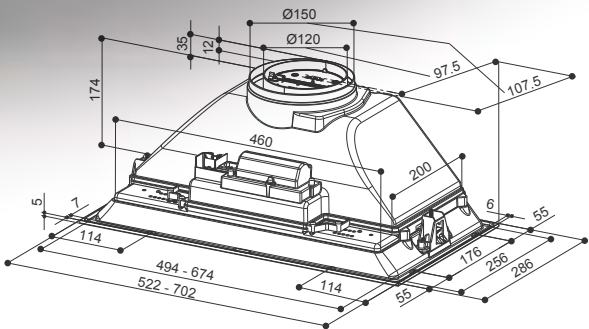

To be installed at a minimum distance from the hob of 65 cm.

INKA SMART C



INKA SMART C LG A52 cod. 305.0599.305
INKA SMART C LG A70 cod. 305.0599.306



LED LIGHT



FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0556.527
• Light grey	Air capacity IEC point	160	220	335	F23 Charcoal filter
Controls	Pressure	230	260	280	Cod. 112.0556.528
Electromechanical	Input	80	95	115	FLL23 Charcoal filter Long Lasting
Lighting	Noise level	54	59	66	
2 LED lights					
Grease filter					
Cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
520 / 700 mm					
Energy class					
C					

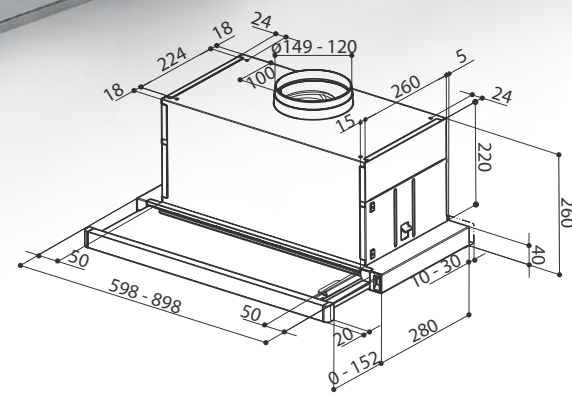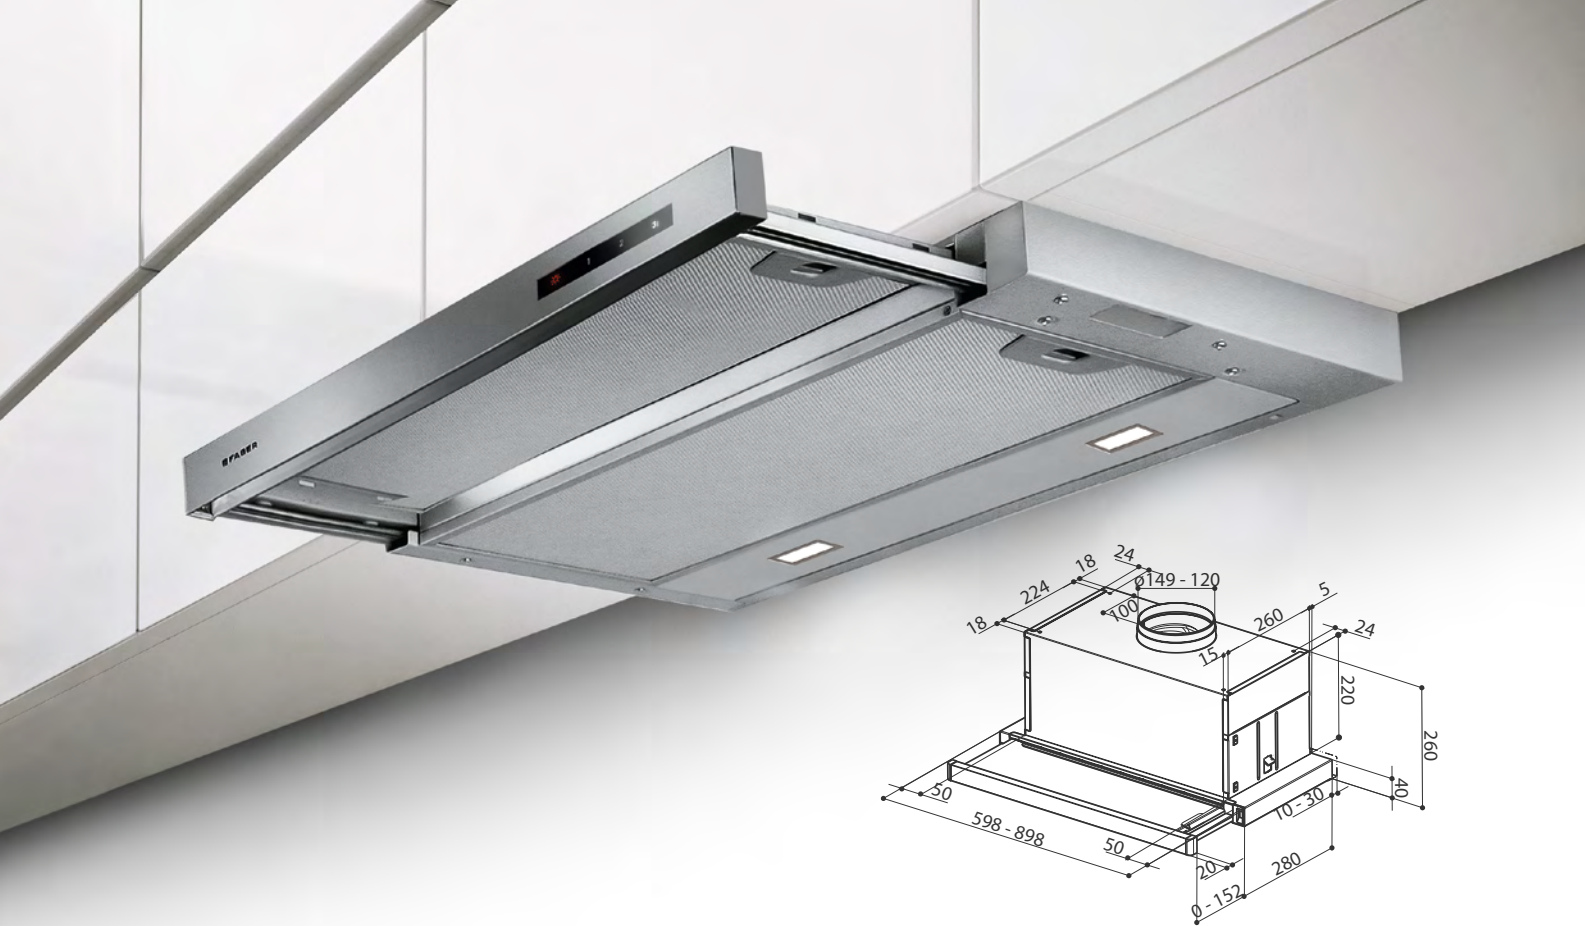



To be installed at a minimum distance from the hob of 65 cm.

MAXIMA TOUCH

MAXIMA NG TOUCH EV8 LED X A60 cod. 315.0635.146
MAXIMA NG TOUCH EV8 LED X A90 cod. 315.0635.147



FEATURES	PERFORMANCE	ACCESSORIES
Finish • Metal aluminium / Stainless steel handle	Speed 1 2 3 INT	Cod. 112.0157.240 F8 Charcoal filter
Controls Touch control	Air capacity IEC point 310 470 620 740	Cod. 112.0327.007 ENERGY Remote blower kit
Lighting 2 LED lights	Pressure 390 460 500 530	Cod. 112.0158.127 FHP8 Charcoal filter High Performance
Grease filter Cassettes dishwasher safe	Input 130 165 210 250	Cod. 112.0185.278 FLL8 Charcoal filter Long Lasting
Ø of air outlet 150 / 120 mm	Noise level 54 59 63 66	
Width 600 / 900 mm		
Energy class B		

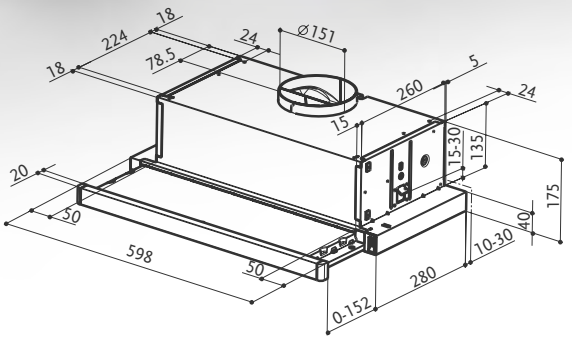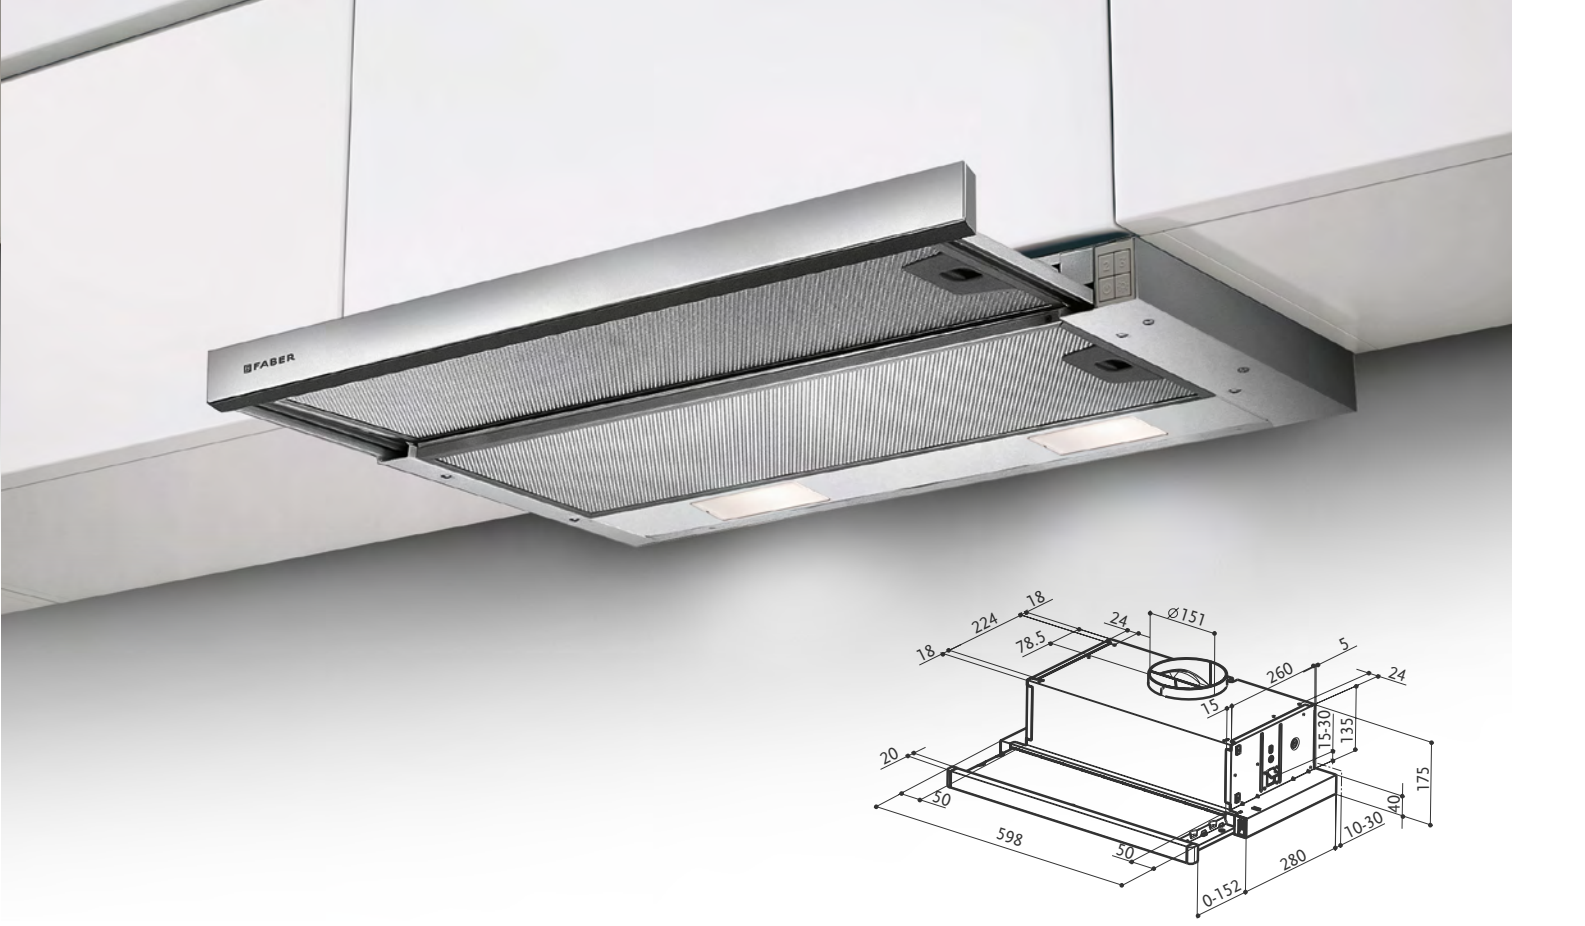


To be installed at a minimum distance from the hob of 65 cm.

FLEXA HIP

FLEXA NG HIP AM/X A60 cod. 315.0635.133



FEATURES	PERFORMANCE	ACCESSORIES
Finish • Metal aluminium / Stainless steel handle	Speed 1 2 3	Cod. 112.0067.944 F3 Charcoal filter
Controls Electromechanical	Air capacity IEC point 220 320 420	Cod. 112.0544.470 FLL3 Charcoal filter Long Lasting
Lighting 2 LED lights	Pressure 180 200 220	
Grease filter Cassettes dishwasher safe	Input 90 105 140	
Ø of air outlet 150 / 120 mm	Noise level 57 65 69	
Width 600 mm		
Energy class D		

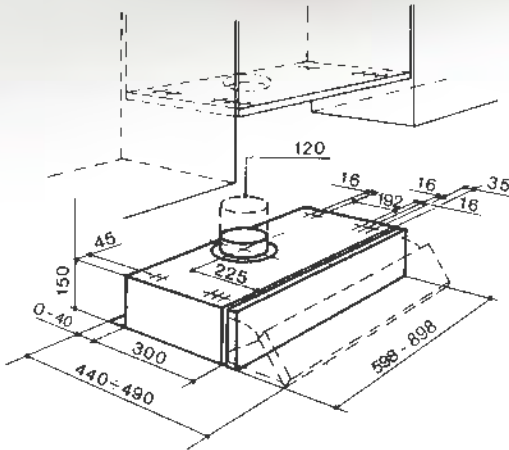

2156 - 2152


2156 SRM LG/X A60 cod. 315.0547.816
2156 SRM LG/X A90 cod. 315.0547.817
2152 SRM LG A60 cod. 315.0547.814
2152 SRM LG A90 cod. 315.0547.815

To be installed at a minimum distance from the hob of 65 cm.


LED LIGHT



FEATURES	PERFORMANCE			ACCESSORIES	
Finish • Light grey / Stainless steel grid • Light grey	Speed	1	2	3	Cod. 112.0157.238 F1 Charcoal filter (order 2 pieces)
Controls Electromechanical	Air capacity IEC point	200 260 370			Cod. 112.0157.248 Metal Grease filter 600 mm version
Lighting 2 LED lights	Pressure	160 280 370			Cod. 112.0157.249 Metal Grease filter 900 mm version
Grease filter Metal	Input	150 175 230			
Ø of air outlet 120 mm	Noise level	58 65 72			
Width 600 / 900 mm					
Energy class D					
Blowers 2					

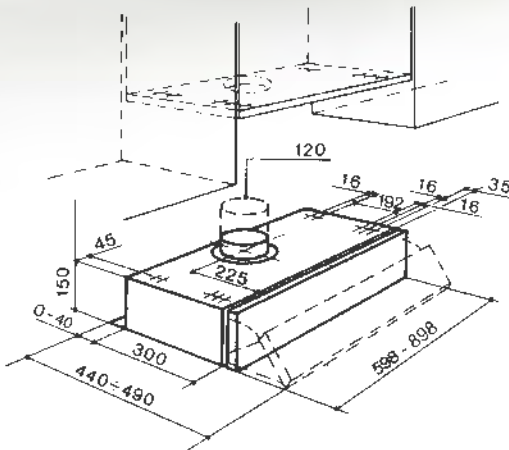

152


152 SRM LG A60 cod. 315.0547.802
152 SRM LG A90 cod. 315.0547.803
152 SRM LG/X A60 cod. 315.0547.804
152 SRM LG/X A90 cod. 315.0547.805

To be installed at a minimum distance from the hob of 65 cm.


LED LIGHT




FEATURES	PERFORMANCE			ACCESSORIES	
Finish • Light grey • Light grey / Stainless steel grid	Speed	1	2	3	Cod. 112.0157.238 F1 Charcoal filter (order 1 piece)
Controls Electromechanical	Air capacity IEC point	115	160	225	Only 152 LG model:
Lighting LED light	Pressure	190	310	370	Cod. 112.0157.248 Metal Grease filter 600 mm version
Grease filter Synthetic Metal (LG/X)	Input	80	95	115	Cod. 112.0157.249 Metal Grease filter 900 mm version
Ø of air outlet 120 mm	Noise level	52	59	68	Cod. 112.0157.289 Synthetic filter kit
Width 600 / 900 mm					
Energy class D					
Blower 1					

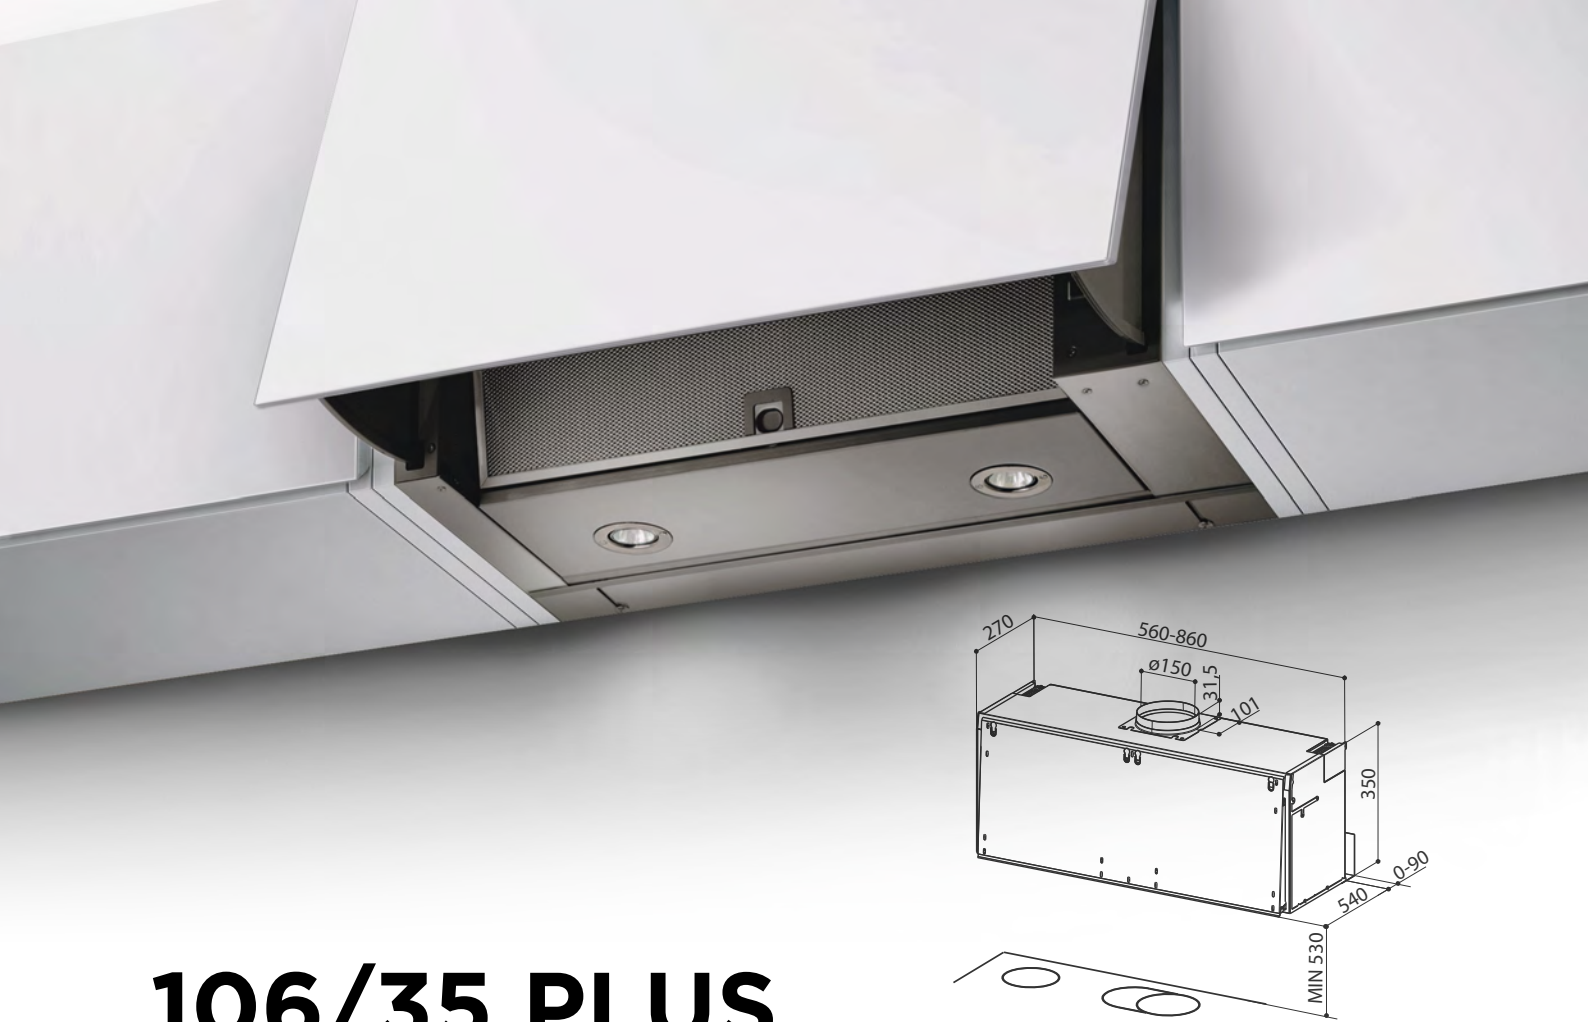


106/35 PLUS

106/35 PLUS SRM LG A56/3 cod. 310.0685.181
106/35 PLUS SRM LG A86/3 cod. 310.0685.182

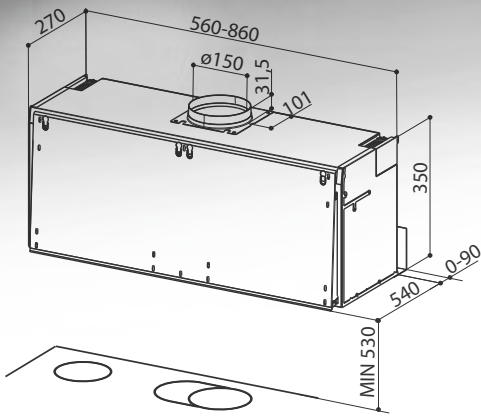

To be installed at a minimum distance from the hob of 53 cm.




FEATURES	PERFORMANCE				ACCESSORIES
Finish	Speed	1	2	3	Cod. 112.0067.944
• Light grey	Air capacity IEC point	260 340 450			F3 Charcoal filter
Controls	Pressure	220 240 250			Cod. 112.0327.007
Electromechanical	Input	85	95	115	ENERGY Remote blower kit
Lighting	Noise level	52	60	66	Cod. 112.0544.470
2 LED lights					FLL3 Charcoal filter
Grease filter					Long Lasting
Cassettes dishwasher safe					
Ø of air outlet					
150 / 120 mm					
Width					
560 / 860 mm					
Energy class					
C					



2740

2740 SRM X A60 (VIS) FB EXP cod. 300.0557.576
2740 SRM X A90 (VIS) FB EXP cod. 300.0557.577

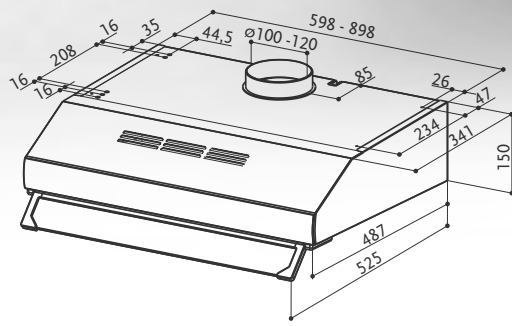

To be installed at a minimum distance from the hob of 65 cm.




FEATURES	PERFORMANCE			ACCESSORIES	
Finish	Speed	1	2	3	Cod. 112.0157.238
• Stainless steel	Air capacity IEC point	205 275 380			F1 Charcoal filter
Controls	Pressure	130	240	330	
Electromechanical	Input	155	175	230	
Lighting	Noise level	55	63	70	
2 LED lights					
Grease filter					
Metal					
Ø of air outlet					
100 / 120 mm					
Width					
600 / 900 mm.					
Energy class					
D					
Blowers					
2					

A thin, dark grey line that starts as a vertical line on the left, curves smoothly into a horizontal line on the right, framing the word 'ACCESSORIES' from above and the left.

ACCESSORIES

REMOTE BLOWER KIT

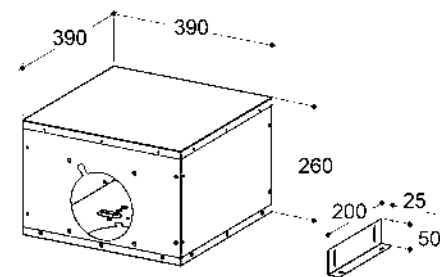

Ø 150 mm
ingoing / outlet

REMOTE ASPIRATION KIT ENERGY
cod. 112.0327.007

- Bella Silence

- Bella Silence Island

- Chloè

- Chloè XL

- Cylindra

- Cylindra Gloss Plus

- Cylindra Island

- Cylindra Island Gloss Plus

- Daisy Plus

- Eclipse

- Glassy Island

- Heaven 2.0

- Heaven Glass 2.0

- Heaven Pearl White

- Inka Lux
- In-Nova Premium

- In-Nova Touch

- Nice

- Maxima Touch

- Premio Angolo/SP

- Ray

- Solaris

- Stilo Angolo

- Stilo Comfort

- Stilo Comfort Island

- Stilo Glass Smart

- Stilo Glass Smart Island

- Stilo Smart

- Stilo DX-SX

- T-Dark
- Tender


- Thea

- Veil


- 106/35 Plus

REMOTE ASPIRATION KIT FABULA
cod. 112.0327.008

- Fabula Plus



REMOTE EXTERNAL

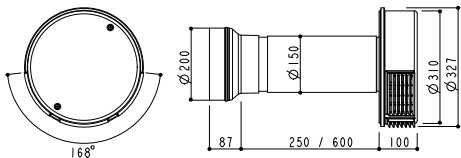

Performace Air capacity
IEC point
INT 750 m³ / h



Color CREAM
net weight 7 kg

MISTRAL OUTDOOR
cod. 110.0365.067

CEILING

DOWNDRAFT DESIGN



Heaven 2.0

HEAVEN 2.0 X 90 RB
cod. 110.0360.483



Fabula

FABULA BK 90 RB
cod. 110.0360.581

WALL



Stilo

STILO X A60 NG RB
cod. 325.0653.095
STILO X A90 NG RB
cod. 325.0653.093

CHIMNEYS

UPPER
KIT ALTO H990 X cod. 112.0157.252

- Nice

- Ray

- Stilo DX-SX

- Bella Silence
- Stilo Comfort

- Stilo Smart


- Stilo Glass Smart

UPPER
KIT CHIMNEY SUP.ALTO BK MATT H990 cod. 112.0621.232

- Stilo Comfort BK


UPPER
KIT CHIMNEY SUP.ALTO WH MATT H990 cod. 112.0623.756

- Stilo Comfort WH




UPPER
KIT SOLARIS H990 X cod. 112.0157.261

- Solaris




UPPER
KIT TENDER H990 X cod. 112.0157.262

- Tender




UPPER
KIT PREMIO ANGOLO H990 X cod. 112.0157.263

- Premio Corner/SP
- Stilo Corner



UPPER
KIT ISLAND H990 D370 WH cod. 112.0286.014

- Cylindra Island



KIT CHIMNEY ISLAND H450-590 CAST IRON
cod. 112.0516.426

- Chloè XL Island

KIT CHIMNEY ISLAND H450-590 COUNTRY GREY MATT
cod. 112.0516.427


- Chloè XL Island

KIT CHIMNEY ISLAND H450-590 WHITE MATT
cod. 112.0516.428

- Thea Island

KIT CHIMNEY ISLAND H450-590 DARK GREY MATT
cod. 112.0516.430


- Thea Island



KIT CHIMNEY 300X160 H990 BK cod. 112.0569.164

KIT CHIMNEY 300X160 H990 WH cod. 112.0569.163

- Glam Fit
- Glam Fit Zero Drip Plus



KIT CHIMNEY cod. 112.0696.899

- Pure Black
- True Black
- True Double Black

KIT CHIMNEY cod. 112.0729.875

- Beat XL Wall - Nero Opaco

KIT CHIMNEY cod. 112.0729.876

- Beat XL Wall - Bianco Opaco

KIT CHIMNEY cod. 112.0741.602

- Beat XL Wall - Dark Forest


CHIMNEY EXTENSION cod. 112.0696.584

- Pure Black
- True Black
- True Double Black


AIR-DUCT SYSTEM Ø 120 mm

FLAT DUCT TR 1500 cod. 112.0157.294


- Galileo 60 H
- Galileo Smart 60 H



ROUND TO RECTANGULAR ADAPTER cod. 112.0157.296




VERTICAL 90° ELBOW BEND cod. 112.0157.298




HORIZONTAL 90° BEND cod. 112.0157.300


- Galileo 60H
- Galileo Smart 60H (lateral outlet)




RECTANGULAR LOUVRED GRILLE cod. 112.0157.304




HORIZONTAL 90° ELBOW BEND cod. 112.0157.306




ROUND PIPE TC 1000 cod. 112.0157.308




FLAT DUCT CONNECTOR cod. 112.0157.295



WALL CONNECTOR cod. 112.0157.297




VERTICAL 90° BEND cod. 112.0157.299




REDUCER TO 60 MM cod. 112.0557.017

- Galileo 60H
- Galileo Smart 60 H




FLEXIBLE HOSE cod. 112.0157.301


L = 1,5 m Ø 130 mm




ROUND LOUVRED GRILLE Ø 125 MM cod. 112.0157.303




BRACKET cod. 112.0157.305



RIGHT ANGLE BEND 90° Ø 125 MM cod. 112.0157.307



FLANGE cod. 112.0157.309




NOTE: Minimum order 10 pieces per code (or multiples of 10)

AIR-DUCT SYSTEM Ø 150 MM OR EQUIVALENT


FLAT DUCT TR 1200 220X90 MM cod. 112.0459.427

- Galileo 100 H
- Galileo Smart 100 H
- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light




ROUND TO RECTANGULAR ADAPTER 220X90 MM cod. 112.0459.429

- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light




VERTICAL 90° BEND 220X90 MM cod. 112.0459.453

- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light




BRACKET 220X90 MM cod. 112.0459.456


- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light



FLEXIBLE CONNECTOR RF 600 cod. 112.0280.685



RIGHT ANGLE BEND 90° Ø 150 MM cod. 112.0253.688




DIRECTIONAL GRID D150 ABS VO W cod. 133.0016.964

NOTE: Minimum order 10 pieces per code (or multiples of 10)


FLAT DUCT CONNECTOR 220X90 MM cod. 112.0459.428

- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light

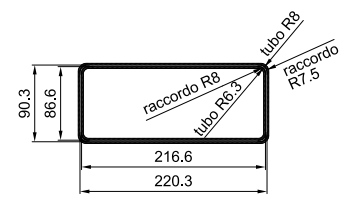


90° ELBOW BEND 220X90 MM cod. 112.0459.451

- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light




HORIZONTAL 90° BEND 220X90 MM cod. 112.0459.455

- Galileo 100 H
- Galileo Smart 100 H
- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light




ROUND PIPE TC 1000 Ø 150 MM cod. 112.0253.681




FLEXIBLE HOSE cod. 112.0280.687


L = 1,5 m Ø 150 mm



ROUND CONNECTOR Ø 150 MM cod. 112.0253.690



PIPE GRID 220X90 cod. 112.0605.516



VALVE


NO RETURN VALVE D120 cod. 112.0189.207




NO RETURN VALVE D100 cod. 112.0572.297




NO RETURN VALVE 3D D150 cod. 112.0569.781




NO RETURN VALVE 3D D125 cod. 112.0569.782



KIT VALVE D150 cod. 112.0086.450



DUCT W/VALVE HERMETIC D150 cod. 112.0569.783



DUCT W/VALVE HERMETIC D125 cod. 112.0569.784



NO RETURN VALVE 220X90 cod. 112.0605.517



REMOTE CONTROL

REMOTE CONTROL 7T PREMIUM cod. 112.0676.782

- Beat XL Wall
 - Bella Silence
 - Bella Silence Island
 - Chloè
 - Chloè Island
 - Corinthia Island
 - Cylindra
 - Cylindra Gloss Plus
 - Cylindra Island
 - Cylindra Island Gloss Plus
 - Fabula Plus
 - Grexia
 - K-Air
- In-Nova Air
 - In-Nova Premium
 - In-Nova Touch
 - In-Nova Zero Drip
 - In-Nova Zero Drip Extreme
 - In-Nova Zero Drip Lite
 - In-Nova Zero Drip Plus
 - Onyx-T
 - T-Dark
 - T-Light Island
 - Talika
 - Ultra Slim



CLIN&CLIN



CLEANING CLOTHES KIT CLIN&CLIN (5 PIECES)
cod. 112.0157.293

NOTE
Cloths: minimum order 30 packagings or multiples of 30

REVITALISING PASTE 55 ML
cod. 112.0157.501

NOTE
Paste: minimum order 10 pieces or multiples of 10 (55 ml)

REVITALISING PASTE 200 ML
cod. 112.0157.502

NOTE
Paste: minimum order 6 pieces or multiples of 6 (200 ml)

FABER LIGHTING KIT

KIT 6 LED G9 2,5 W cod. 112.0505.117

- Nest Plus

SYNTHETIC FILTER

KIT SYNTHETIC FILTER cod. 112.0157.289

- 152 LG




GREASE FILTERS

1 KIT GREASE FILTER 60 cod. 112.0157.248

1 BLOWER
- 152 LG


2 BLOWERS
- 2152
- 2156



1 KIT GREASE FILTER 90 cod. 112.0157.249

1 BLOWER
- 152 LG

2 BLOWERS
- 2152
- 2156



STAINLESS STEEL FILTER KIT IN-NOVA 60 cod. 112.0624.485

STAINLESS STEEL FILTER KIT IN-NOVA 90 cod. 112.0624.486

STAINLESS STEEL FILTER KIT IN-NOVA 120 cod. 112.0624.487

REAR AIR OUTLET KIT

REAR AIR OUTLET KIT CHLOÈ OLD METAL
cod. 112.0490.249

REAR AIR OUTLET KIT CHLOÈ OLD COPPER
cod. 112.0490.250



REAR AIR OUTLET KIT CHLOÈ CAST IRON
cod. 112.0490.261

REAR AIR OUTLET KIT CHLOÈ OLD BRASS
cod. 112.0490.262

REAR AIR OUTLET KIT CHLOÈ DG MATTE
cod. 112.0490.263

REAR AIR OUTLET KIT CHLOÈ CG MATTE
cod. 112.0490.264

- Chloè

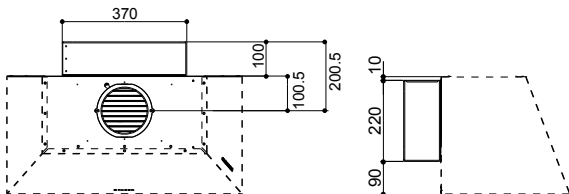

The kit is matched to the color of the hood

RECYCLING KIT

C.A. HFH cod. 112.0327.631

- Bella Comfort
- Nice
- Ray
- Stilo DX-SX
- Stilo Comfort
- Stilo Glass Smart
- Stilo Smart




RECYCLING KIT WH cod. 112.0252.439

- Daisy WH
- Glam-Light WG1C/WG3C
- Glam-Light WH/T
- Glam-Light WH/WG

RECYCLING KIT BK cod. 112.0252.442

- Daisy BK
- Glam-Light DG/LG



RECYCLING KIT T-SHAPE WALL
cod. 112.0626.902


- Bella Comfort
 - Nice
 - Ray
 - Onyx-T
 - T-Dark
 - Stilo Comfort
- Stilo Dx/Sx
 - Stilo Glass Value
 - Stilo Smart

RECYCLING KIT T-SHAPE ISLAND
cod. 112.0626.903

- Glassy Island
- T-Shelf
- Stilo Comfort Island


GALILEO INSTALLATION KIT

RECYCLING KIT H60 cod. 112.0540.730

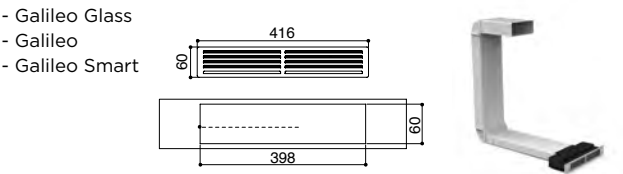

Ceramic filter included

RECYCLING KIT H100 cod. 112.0540.781

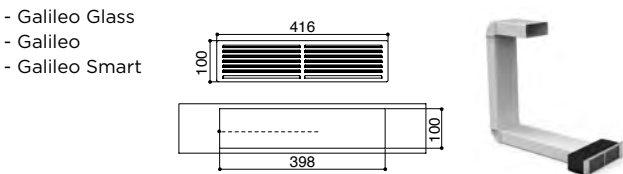


Ceramic filter included

DUCTING KIT cod. 112.0540.782



KIT RECYCLING LONG LASTING H80 cod. 112.0605.735

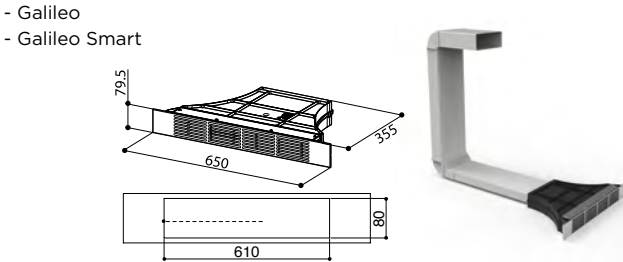

Filtro Long Lasting incluso nel kit

FILTERING KIT H60 cod. 112.0626.656



FILTERING KIT H100 cod. 112.0626.657



LATERAL DUCTING KIT cod. 112.0711.356



FRONT RECYCLING VERSION INSTALLATION/ PLINTH MIN. H60 cod. 112.0711.988



LATERAL RECYCLING VERSION INSTALLATION/ PLINTH MIN. H70 cod. 112.0711.987



REAR FILTERING KIT cod. 112.0685.046



REFILL

REFILL CERAMIC H100 cod. 112.0548.448



REFILL CERAMIC H60 cod. 112.0548.447



REFILL LONG LASTING H80 cod. 112.0605.736



REFILL LONG LASTING FILTER HE 60CM H80 cod. 112.0679.153



REFILL LONG LASTING FILTER HE FILTRAZIONE POSTERIORE cod. 112.0684.122




REFILL C.A. TUBAZIONE RETTANGOLARE cod. 112.0472.396



REFILL 1 C.F. HFH cod. 112.0261.791



REFILL LONG LASTING HE TOP ACCESS NEUTRAL cod. 112.0716.092

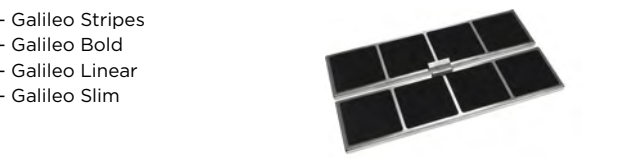

F-LIGHT DUCTING KIT

DUCTING KIT F-LIGHT cod. 112.0169.216




DUCTING KIT AIRLANE cod. 112.0542.875



EXTENSION KIT CABLES FOR SUSPENDED HOODS

CABLE EXTENSION KIT FOR SUSPENDED HOODS cod. 112.0691.642



SPLASHBACKS AND CORNER ADAPTER

KIT STAINLESS STEEL SPLASHBACKS 900 mm cod. 112.0157.271




KIT STAINLESS STEEL SPLASHBACKS 1200 mm cod. 112.0157.272




CORNER KIT CORNER SPLASHBACKS PREMIO X cod. 112.0157.273



CORNER KIT 3 CORNER SPLASHBACKS EGYZIA X cod. 112.0157.274

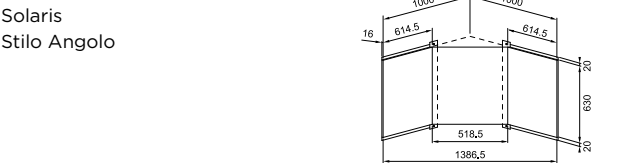

CORNER ADAPTER KIT X cod. 112.0157.284



CHARCOAL FILTERS LONG LASTING



Multi-layer filter, it guarantees a double filtration and an optimal air cleanliness, it has a duration of up to 3 years.

FLL3 KIT 2.C.A. LONG LASTING

cod. 112.0544.470

- Flexa HIP
- In-Nova Smart
- Value
- 106/35 Plus



FLL8 KIT 2 C.A. LONG LASTING D196 H37

cod. 112.0185.278


- | | |
|---------------------|---------------|
| - Beat | - Maxima |
| - Belle | - Modular |
| - Belle Plus | - Nest Plus |
| - C line Plus | - Odette Plus |
| - Chlo  XL | - Ranch |
| - Chlo  XL Isola | - Soft Cube |
| - Daisy | - Solaris |
| - Glam-Light | - Tender |
| - Glam Light | - Thea |
| - Zero Drip Plus | - Thea Isola |
| - Gr xia | - Trendy |
| - Heaven 2.0 | - T-Shelf |
| - Heaven Pear White | - Tweet |
| - In-Light | - Veil |
| - Inca Lux 2.0 | - West |
| - Inca Lux Glass | - West Angolo |
| - Inka Plus | - Zoom Plus |
| - K-Air | - 106/35 Plus |
| - Lithos | |
| - Lybra Plus | |



FLL9 KIT 1 C.A. LONG LASTING EASY CUBE 267x235

cod. 112.0185.276

- | | |
|-----------------------------|---------------------------|
| - Corinthia Isola | - Stilo Isola/SP |
| - Cylindra | - Stilo Comfort |
| - Cylindra Isola | - Stilo Comfort Isola |
| - Cylindra Gloss Plus | - Stilo Glass Smart |
| - Cylindra Isola Gloss Plus | - Stilo Glass Smart Isola |
| - Eclipse | - Stilo Smart |
| - Glassy Isola | - Stilo DX-SX |
| - In-Nova Premium | - T-Dark |
| - In-Nova Touch | - T-Light Isola |
| - In-Nova Zero Drip | |
| - Nice | |
| - Onyx-T | |
| - Premio Angolo/SP | |
| - Ray | |



FLL12 KIT C.A. FABULA

cod. 112.0261.258

- Fabula Plus 90



FLL12 KIT C.A. FABULA

cod. 112.0629.411

- Fabula Plus 60



FLL18-90 KIT C.A. 90 CM

cod. 112.0471.608

- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light
- Inside up



FLL18-120 KIT C.A. 120 CM

cod. 112.0471.609

- Heaven 2.0 Flat
- Heaven Glass 2.0 Flat
- High-Light

KIT FLL23 C.A. D125

cod. 112.0556.528

- Inka ICH (i.smart HCS)
- Inka Smart C
- Inka Smart HC



KIT FLL26 C.A.

cod. 112.0627.248

- In-Nova Zero Drip
- In-Nova Zero Drip Extreme
- In-Nova Zero Drip Lite
- In-Nova Zero Drip Plus



CHARCOAL FILTERS HIGH PERFORMANCE

High-efficiency filter, it guarantees more than 80% filtration capacity of intake fumes and a duration of up to 6 months.

FHP8 KIT 2 C.A. HIGH PERFORMANCE

cod. 112.0158.127

- | | |
|----------------------|---------------|
| - Beat | - Modular |
| - Belle | - Nest Plus |
| - Belle Plus | - Odette Plus |
| - C line Plus | - Ranch |
| - Chlo  XL | - Soft Cube |
| - Chlo  XL Island | - Solaris |
| - Daisy | - Tender |
| - Glam-Light | - Thea |
| - Glam Light | - Thea Isola |
| - Zero Drip Plus | - Trendy |
| - Gr xia | - T-Shelf |
| - Heaven 2.0 | - Tweet |
| - In-Light | - Veil |
| - Heaven Pearl White | - West |
| - Inca Lux 2.0 | - Zoom Plus |
| - Inca Lux Glass | - 106/35 Plus |
| - Inka Plus | |
| - K-Air | |
| - Lithos | |
| - Lybra Plus | |
| - Maxima | |



CHARCOAL FILTERS

Filter composed by a combination of charcoals and it should be replaced every 2-3 months.

F1 KIT 1 C.A. D233 H20

cod. 112.0157.238

- | | |
|----------|---------------|
| 1 BLOWER | 2 BLOWERS |
| - 152 | - 2152 - 2156 |
| | - 2740 |



Order 2 filters for 2 motor hoods

F3 KIT 2 C.A. SMILE

cod. 112.0067.944


- Flexa HIP
- In-Nova Smart
- Value
- 106/35 Plus SRM



F4 KIT 14B

cod. 112.0441.093

- In-Nova Comfort



F8 KIT 2 C.A.D196 H37

cod. 112.0157.240

- | | |
|----------------------|---------------|
| - Beat | - Maxima |
| - Belle | - Modular |
| - Belle Plus | - Nest Plus |
| - C line Plus | - Odette Plus |
| - Chlo  XL | - Ranch |
| - Chlo  XL Island | - Soft Cube |
| - Daisy | - Solaris |
| - Glam-Light | - Tender |
| - Glam Light | - Thea |
| - Zero Drip Plus | - Thea Island |
| - Gr xia | - Trendy |
| - Heaven Pearl White | - T-Shelf |
| - Heaven 2.0 | - Tweet |
| - In-Light | - Veil |
| - Inca Lux 2.0 | - West |
| - Inca Lux Glass | - Zoom Plus |
| - Inka Plus | - 106/35 Plus |
| - K-Air | |
| - Lithos | |
| - Lybra Plus | |



LONG LASTING FILTR NANOSORB

cod. 112.0735.432

- T-Shelf Evolution



F9 KIT 1 C.A. 263x237

cod. 112.0157.243

- | | |
|------------------------------|----------------------------|
| - Corinthia Island | - Onyx-T |
| - Cylindra | - Premio Angolo/SP |
| - Cylindra Island | - Ray |
| - Cylindra Gloss Plus | - Stilo Island/SP |
| - Cylindra Island Gloss Plus | - Stilo Comfort |
| - Eclipse | - Stilo Comfort Island |
| - Glassy Island | - Stilo Glass Smart |
| - In-Nova Premium | - Stilo Glass Smart Island |
| - In-Nova Touch | - Stilo Smart |
| - In-Nova Zero Drip | - Stilo DX-SX |
| - Nice | - T-Dark |
| | - T-Light Island |



F22 KIT C.A. NAUTILUS

cod. 112.0540.783

- Glam-Fit
- Glam Fit Zero Drip Plus
- Talika



KIT F23 C.A. D125

cod. 112.0556.527

- Inka Smart C
- Inka Smart HC
- Inka ICH (i.smart HCS)



INOX DUCTING KIT

cod. 112.0327.632

- Daisy Plus

1 BUFFLE FILTER KIT



cod. 112.0157.288

- Stilo DX-SX
- Glassy Island



INSTALLATION

ABC OF THE HOOD

The extraction hood expels fumes and steam out of the kitchen. It is the most effective solution.

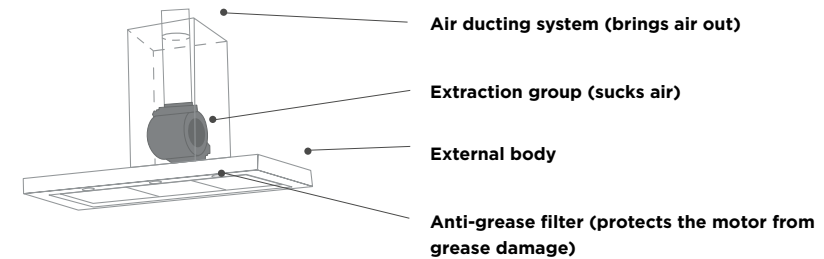

The recycling hood filters the fumes and steam from the air and then returns it to the kitchen.

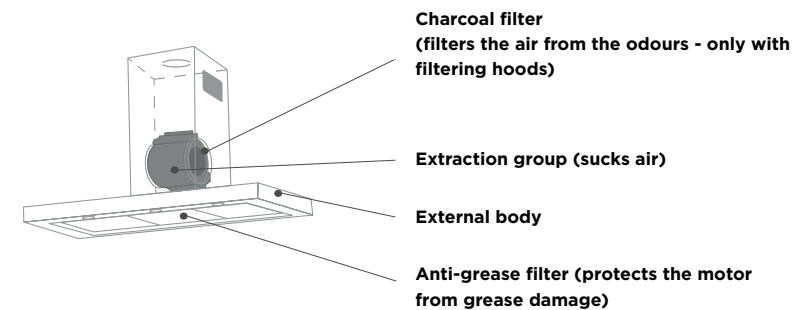

CHOOSE THE RIGHT HOOD

The necessary extraction capacity is determined by the volume of the kitchen. An effective hood changes the air of the kitchen 10 times per hour. A powerful motor is quieter and uses less energy because it is effective at low speeds.

-A hood does not create noise disturbance if its capacity is sufficient without exceeding 55 dB(A) of sound power.

-A powerful motor can be efficient even at lower, quieter speeds.

1 Fan Handbook - F. Bleier 1998


Example: A 15 m² kitchen which is 3 m tall requires a hood which aspirates at least 450 m³/h. Infact: 15 m² x 3 m x 10 = 450 m³/h

Now consult the performance table found in the product catalogue.

The hood is efficient if an equal or higher capacity value is found in one of the speed columns.


$$\text{EFFECTIVENESS} = \text{kitchen m}^2 \times \text{kitchen high} \times \text{10 changes of air}$$

Speed	1	2	3	4	INT
Air capacity IEC point	110	195	260	313	430
Pressure	-	-	-	-	-
input	30	45	55	70	100
Noise level	48	53	58	62	69

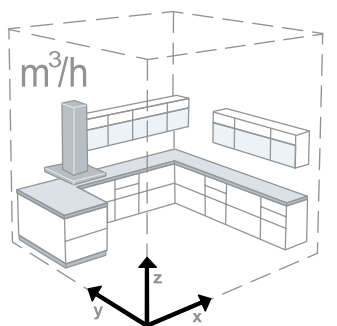


INSTALLATION


Proper installation begins with an inspection. When choosing a hood, you should know:

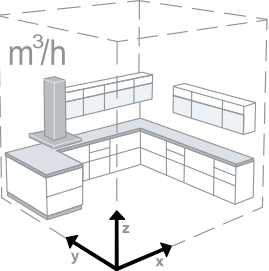

Kitchen volume (which determines the necessary aspiration capacity). See section “Choosing the right hood.”

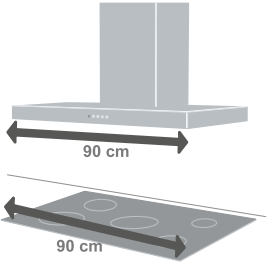


Length of the cooking top (the hood is generally as long as the cooking top area).

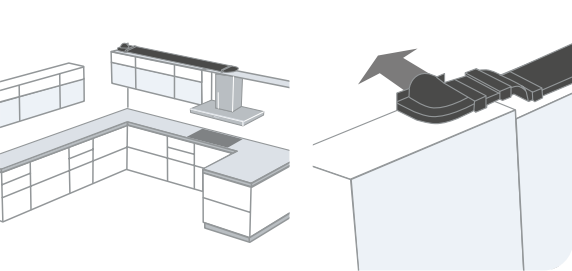


The position and distance of the exit hole (very long and very curved right-angled tubes limit hood efficiency).



Italian D.M. 37/08 requires two aeration holes which communicate with the external wall in the presence of gas-working equipment.
1. an entrance hole for oxygenising the area, to be made in the lower part of the wall of the room which communicates externally.
2. an exit hole for fume discharge, to be made in the upper part of the wall which communicates externally (or in a chimney flue dedicated exclusively to this use).
If the hood aspirates, the exit hole can be used as a terminal conduit that carries the air outside.

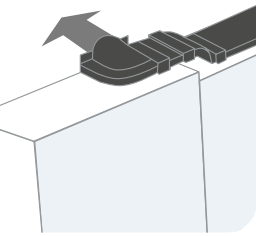

Installation distance

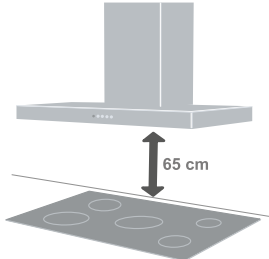

The hood is to be installed at a minimum distance of 65 cm from the cooking top, except for particular models where is specified in the technical drawing and instructions manual.
ATTENTION: the product guarantee will not be considered valid if this distance is not respected.
The hood may not reach declared performance levels if the distance from the cooking top exceeds 75 cm. Some vertical-installation models (ex. Cocktail) are to be installed lower. Check the product's technical manual.

Inspection


- 1 - Turn on the motor
 - 2 - Switch on the lights
- If the hood is an extraction hood, verify that it is properly connected to the exit tubing.
If the hood is a filtering hood, verify that the charcoal filters have been inserted.

First cleaning


- Remove the protective films
- Remove impurities with a damp sponge and a small amount of neutral soap
- Rinse with a damp cloth
- Dry with a soft cloth. If the hood is in stainless steel, continue with a steel glaze
- You can give stainless steel hoods a protective treatment with the Faber Clin&Clin tissue



Faber hoods are easy to install because they have EASY CUBE:

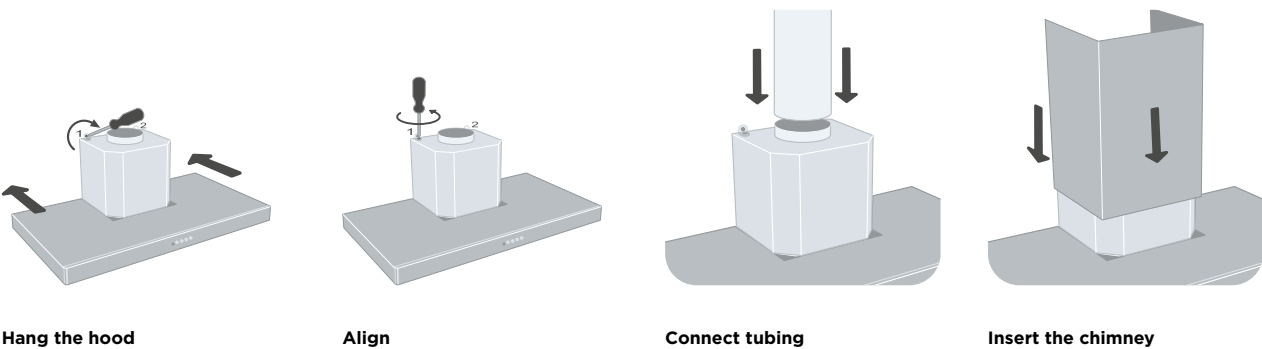

USE AND MAINTENANCE

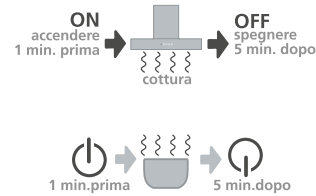

Switch on the hood a minute before cooking begins to create air flow that channels fumes and steam toward the aspiration surfaces.
If necessary, leave the hood switched on even after cooking is finished so that all steam and odours can be properly aspirated.

- Wash the metal anti-grease filters by hand or in the dishwasher every two months¹
 - Replace synthetic anti-grease filters every two months
 - Regular filter maintenance guarantees efficient hood use
- ATTENTION:** grease deposited on the filters is inflammable: be sure to perform regular maintenance


¹ These intervals of time refer to a regular use of the hood, approximately 3 hours per day

- Hood cleaning**
- Remove impurities with a damp sponge and a small amount of neutral soap²
 - Rinse with a damp cloth
 - Dry with a soft cloth, if the hood is in stainless steel, follow the steel brushing
 - Clean the internal hood conduit once a year

² Acid-based cleaning products can damage hood surfaces

ANTI-ODOURS FILTERS

Long lasting

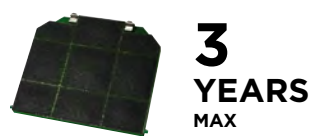

3
YEARS
MAX

Faber has developed a, re-usable active carbon filter. Thanks to the multi-layer technology, the Long Lasting filter further increases filtration efficiency, with the double layer using an initial pre-filtration to capture the largest particles, and a second, more concentrated filtration to guarantee optimal air cleanliness. The filter can be washed in the dishwasher every 3-4 months¹, for a maximum of 3 years and dries at room temperature in a vertical position to allow the water to drain out. Alternatively, it can be placed in an oven at 50° C.

¹ Normal use cooker hood, by around 3 hours per day


High performance



6
MONTHS
MAX

High-efficiency filter with a highly-concentrated carbon micro-granular structure that can guarantee more than 80% filtration capacity of intake fumes and a duration of up to 6 months, double that of a normal charcoal filter, making for economic savings of more than 20%.

CERAMIC FILTER



Charcoal filter that can be regenerated in the oven at 200° every 2-3 months and allows to reach high absorption efficiency

CLIN & CLIN CLEANING LINE

Clin&Clin revitalising paste



Removes marks, spots and small rust stains caused by daily use, restoring a natural shine to steel surfaces.

Clin&Clin protective tissues




Protect and maintain the beauty of steel surfaces over time. Practical and disposable. To be applied on clean, dry surfaces.

QUALITY AND SAFETY


Faber hoods benefit from 60 years of competence in the treatment of kitchen air

- We were the first in the kitchen hood sector to obtain an ISO 9001 company qualitysystem certificate.
- System integrated with Quality, Safety and Environment certified by SGS respecting the ISO 9001:2000, OHSAS 18001 and ISO 14001 norms.
- We have received the SGS Excellence Certificate, the absolute first in the world, number 001.
- All Faber hoods conform to European safety standards (EC mark of conformity), and have also been certified by the IMQ, a reliable, independent organisation further guaranteeing clients on quality (IMQ mark of security).

FABER HOODS ARE DESIGNED FOR SAFETY



Hammered internal edges and tempered glass to avoid risks of cutting.



Thermo-protected motors and self-extinguishing plastics help avoid any risk of fire. Electronics are solid state, cables and connections are all placed correctly to avoid electric shock or dangerous sparks.

All Faber hoods have undergone safety and performance tests. Aspiration and noise capacity have been measured according to standard norms:
- EN 61591
- EN 60704-3
unique specifications for surveying kitchen hood performance.
ATTENTION: Comparisons between different brand hoods should be carried out on complete data obtained according to these standards. The Faber laboratory is NEMKO and IMQ certified.

ASSISTANCE

Faber Technical Assistance is also active in Europe

Check the website www.faberspa.com for phone numbers


- Information about products
- Information about shop branches
- Information about where to purchase spare parts and accessories
- Activation of technical assistance request
- Product or service complaints

The cost of the call may vary depending on the operator used. Please consult the rates of your operator.

All Faber products are covered with a 2-year “Full guarantee”

“Full guarantee” that covers any compliant defects which might be revealed on the hood over this period. This guarantee does not cover defects not attributable to Faber such as those caused by erred installation, by any use not compliant with the instructions detailed in the instruction manual or by damage caused during transport.


SPECIAL FINISHES

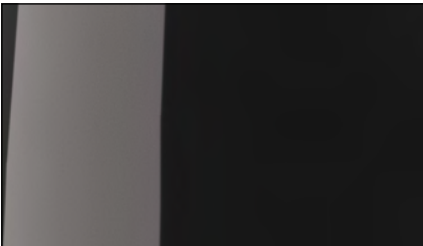


Black gloss




Black matt

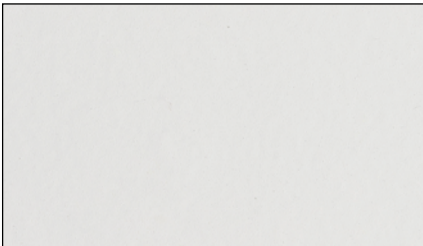

White matt

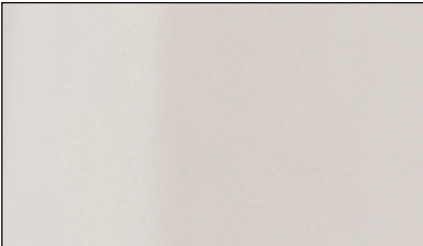


White

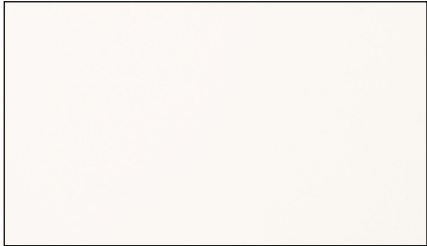


Warm white



Grey matt

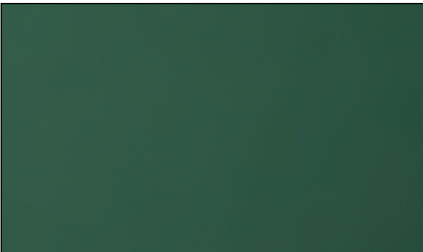

Dark Forest

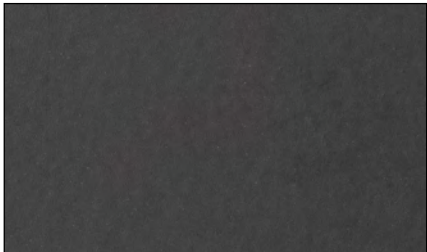


Dark grey matt




Country grey matt



Cast iron

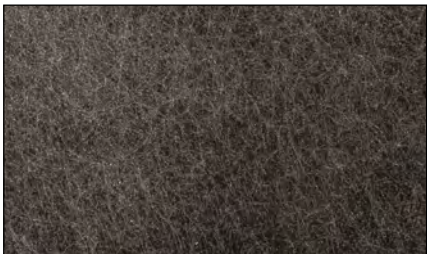

Old metal

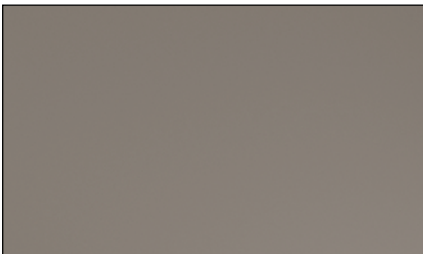

Titanium matt



Cross titanium




Dark grey stoneware




Light grey stoneware


The images are indicative only and are not fully representative of the product finish.

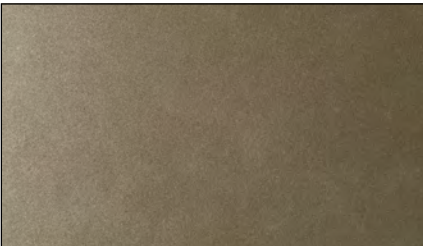


Gold

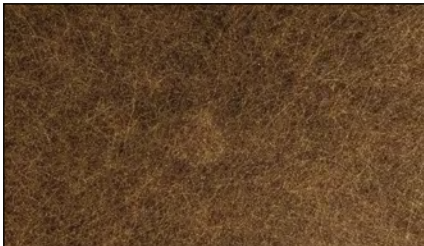


Old brass

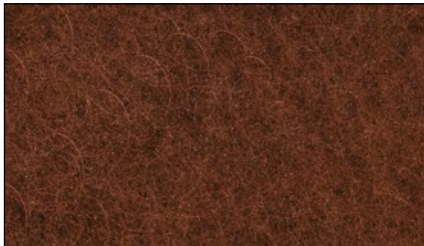


Old copper

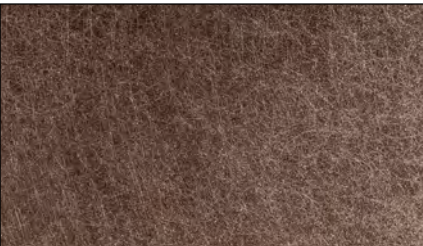


Tibetan silver

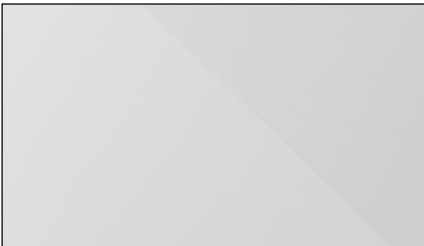

White/Warm gray 3C - WH/WG

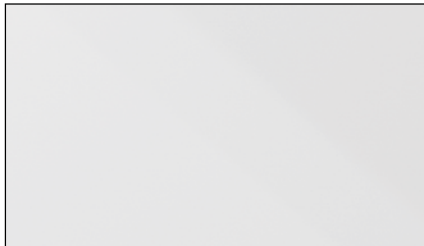

White/Transparent - WH/T

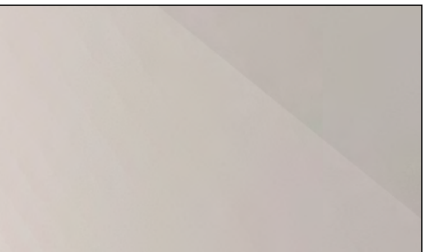

Warm gray 1C/Warm gray 3C - WG1C/WG3C



Dark grey/Light grey - DG/LG



Dusty blue



Sand

The performance shown in this catalogue is declared in accordance with the new Code of Conduct signed by the most qualified European manufacturers members of CECED (European Committee of Domestic Equipment Manufacturers), a strict code for transparency which establishes clear rules to measure air flow and noise level for hoods, common to all cooker hoods manufacturers:

- air capacity according to IEC/EN 61591 method
(with the hood fitted using a ducting pipe)
- noise level according to IEC/EN 60704-3 method (sound power)

FINISHES

AM/X	metal aluminium/stainless steel handle
BK	black
BK GLASS/A	black glass/aluminium
BK GLOSS	black gloss
CG	country grey
CI	cast iron
CT	cross titanium
DB	dusty blue
DF	dark forest
DG	dark grey
DG/C	dark grey/concrete
DGC	dark grey concrete
LG	light grey
LG/X	light grey/stainless steel handle
OB	old brass
OC	old copper
OM	old metal
SS	black body/stainless steel strip
WG	warm gray
WH	white
WH MATT/TS	white matt/tibetan silver
WW	warm white
X	stainless steel
X/OM	stainless steel/old metal
X/V	stainless steel/glass

PERFORMANCE

SPEED	Speed
M³/H	Air capacity IEC point
PA	Pressure
W	Input
dB(A)	Noise level
16	1 motor , width 600 mm
18	1 motor , width 800 mm
19	1 motor , width 900 mm

